

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



FIG. 1

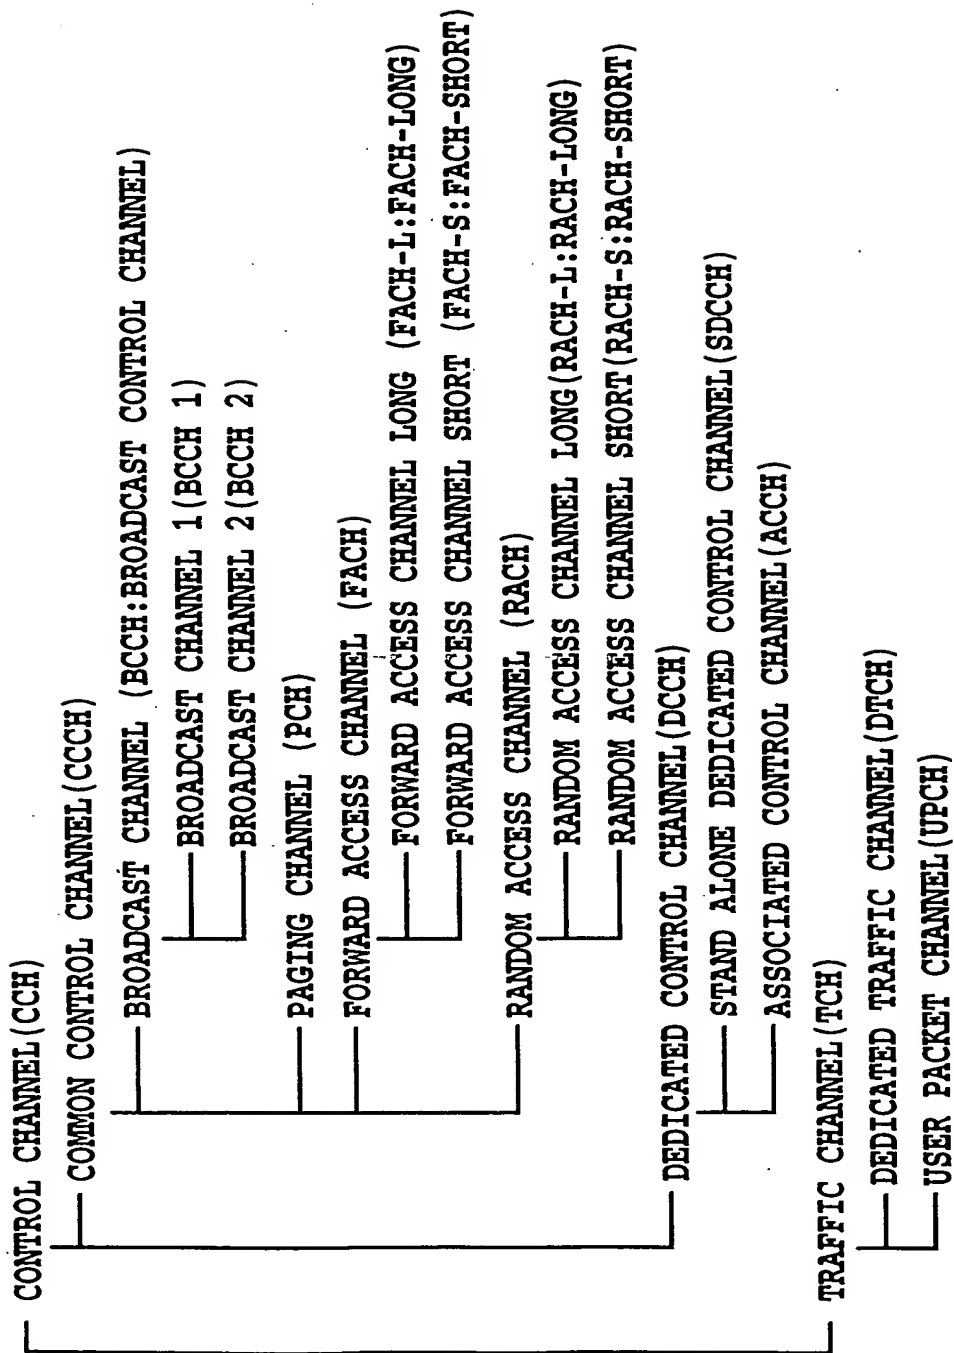


FIG.2

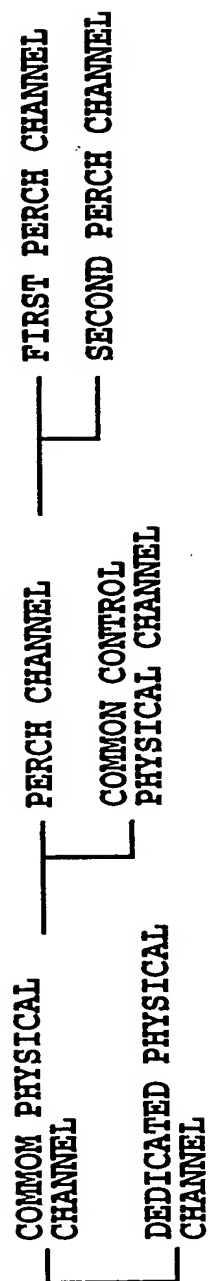



FIG.3


FIG.4

FIG.4A

FIG.4B

FIG.4A

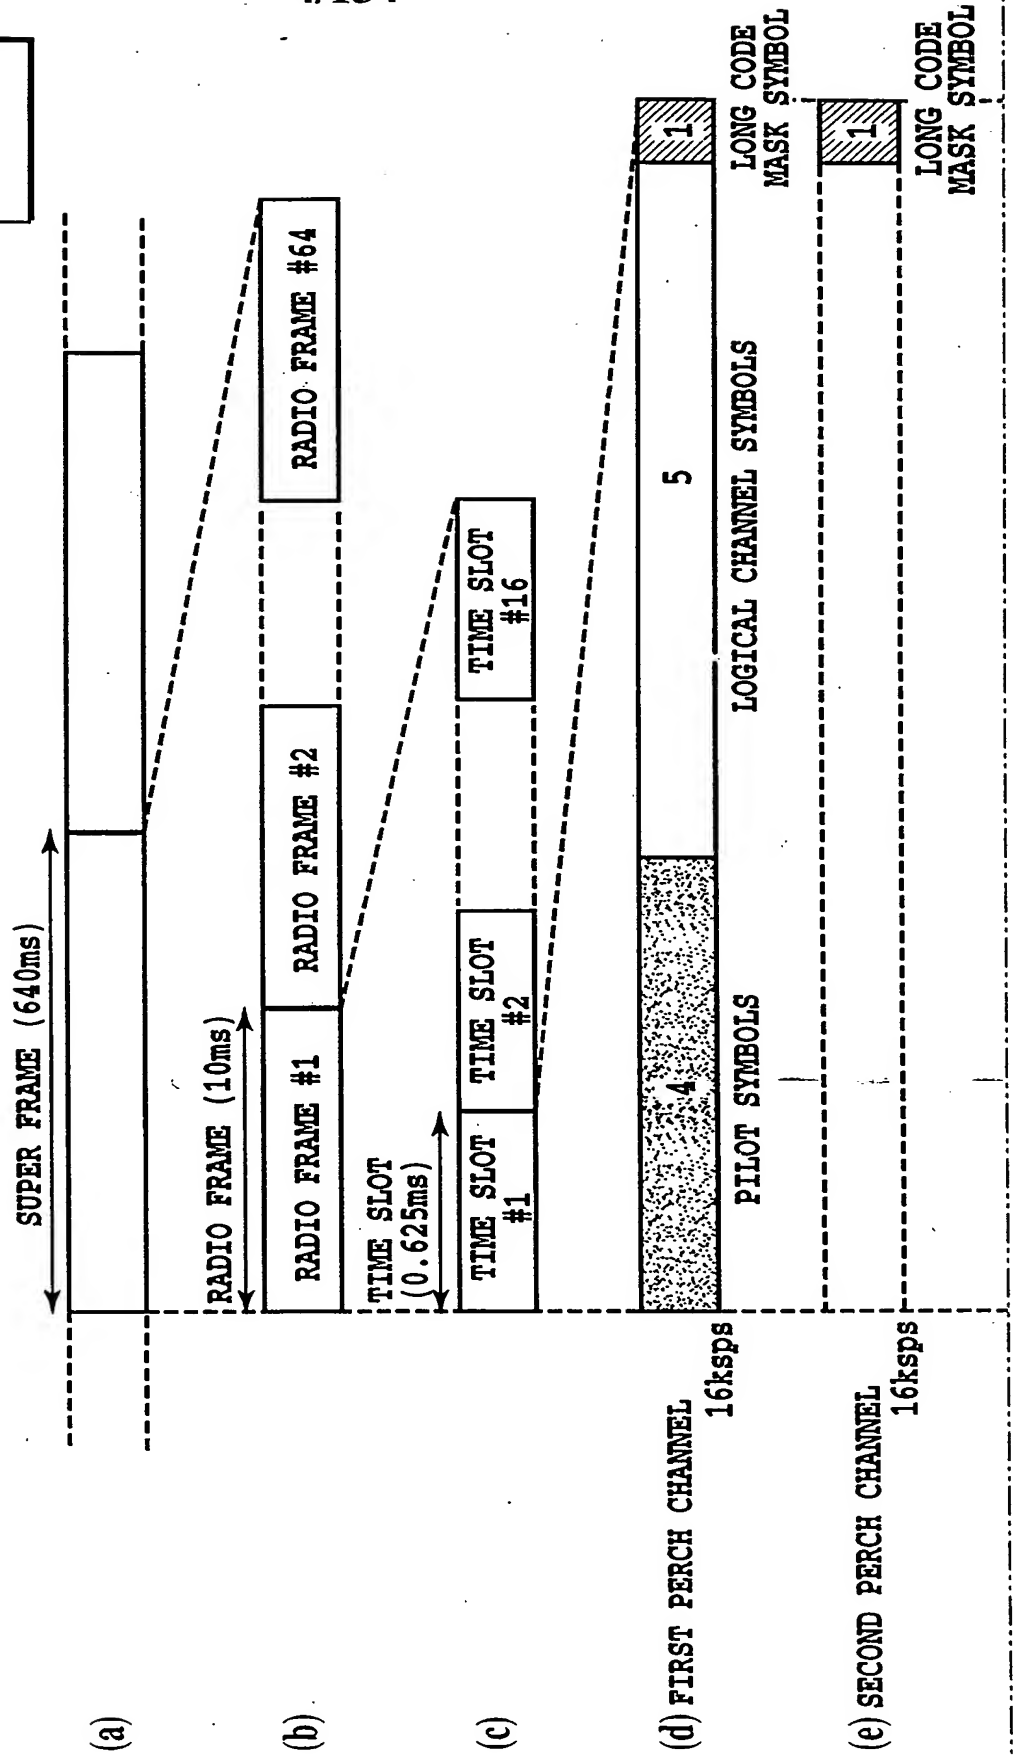

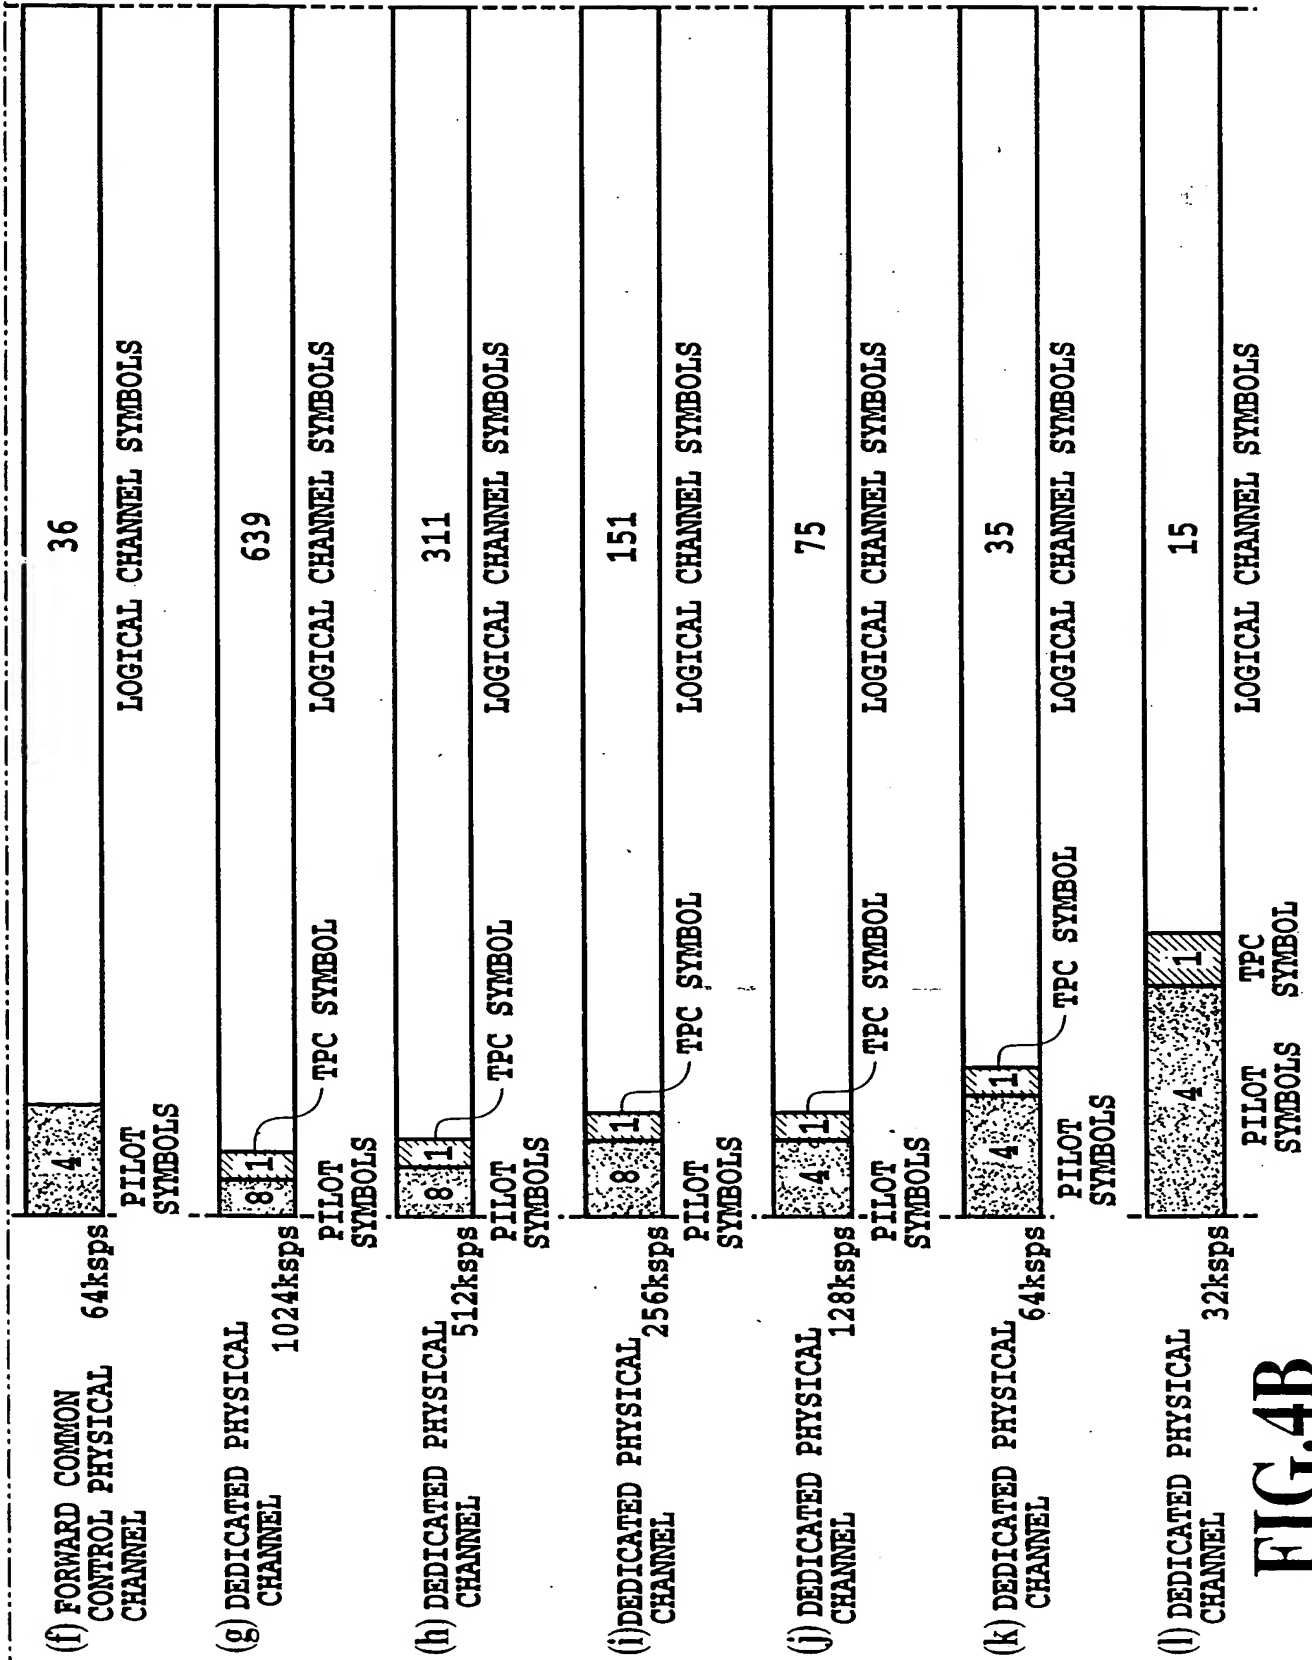

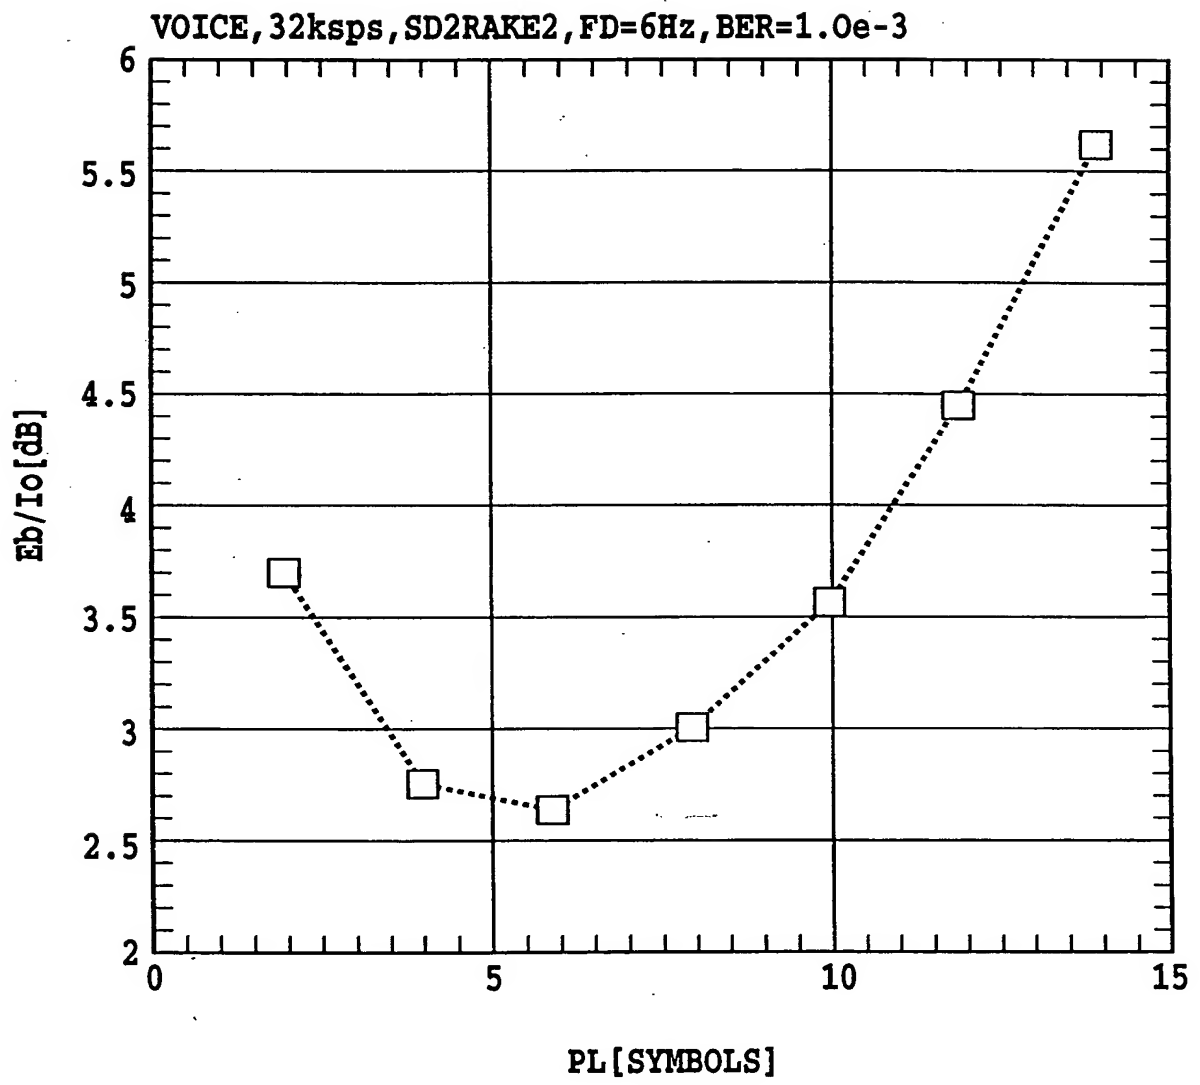


FIG.5

7/134

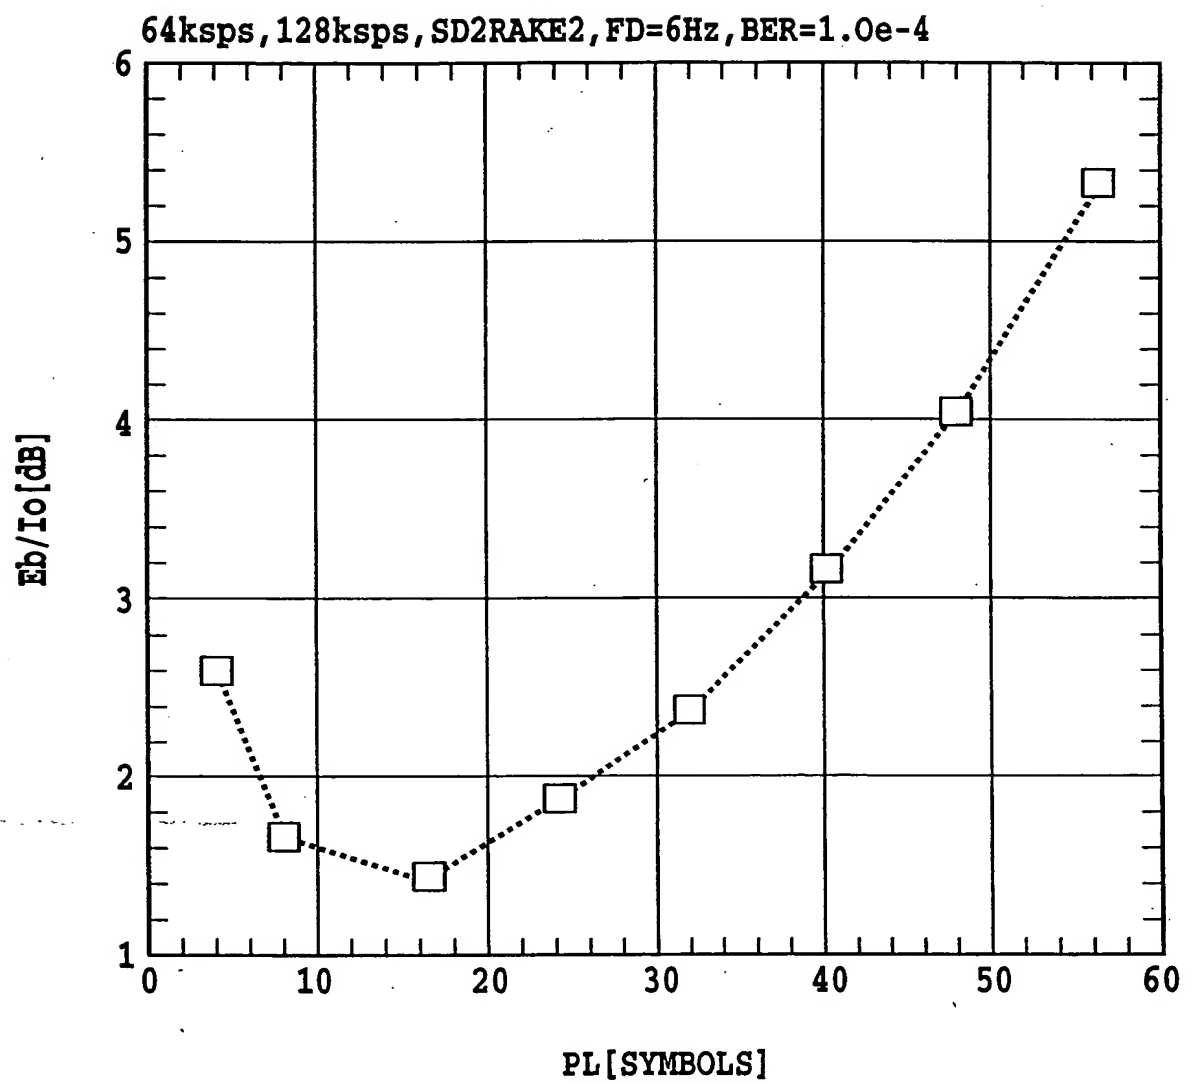


FIG.6

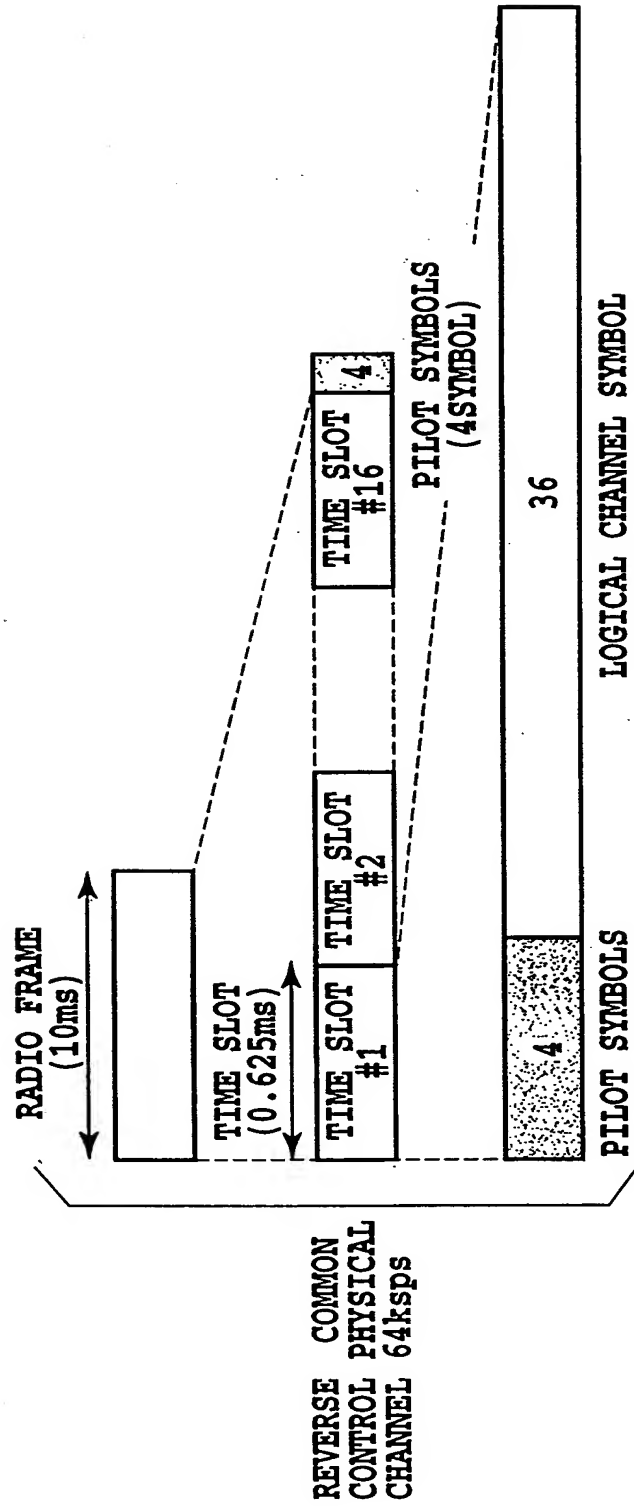


FIG.7A

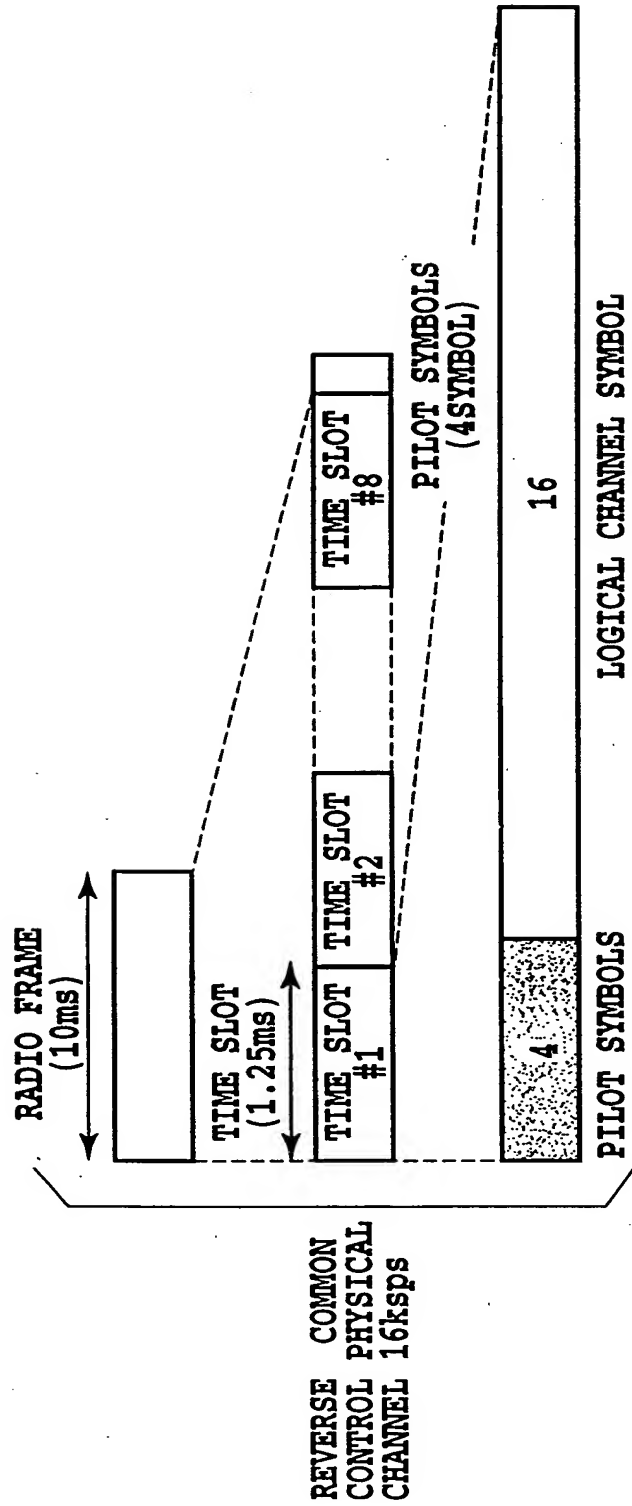


FIG.7B

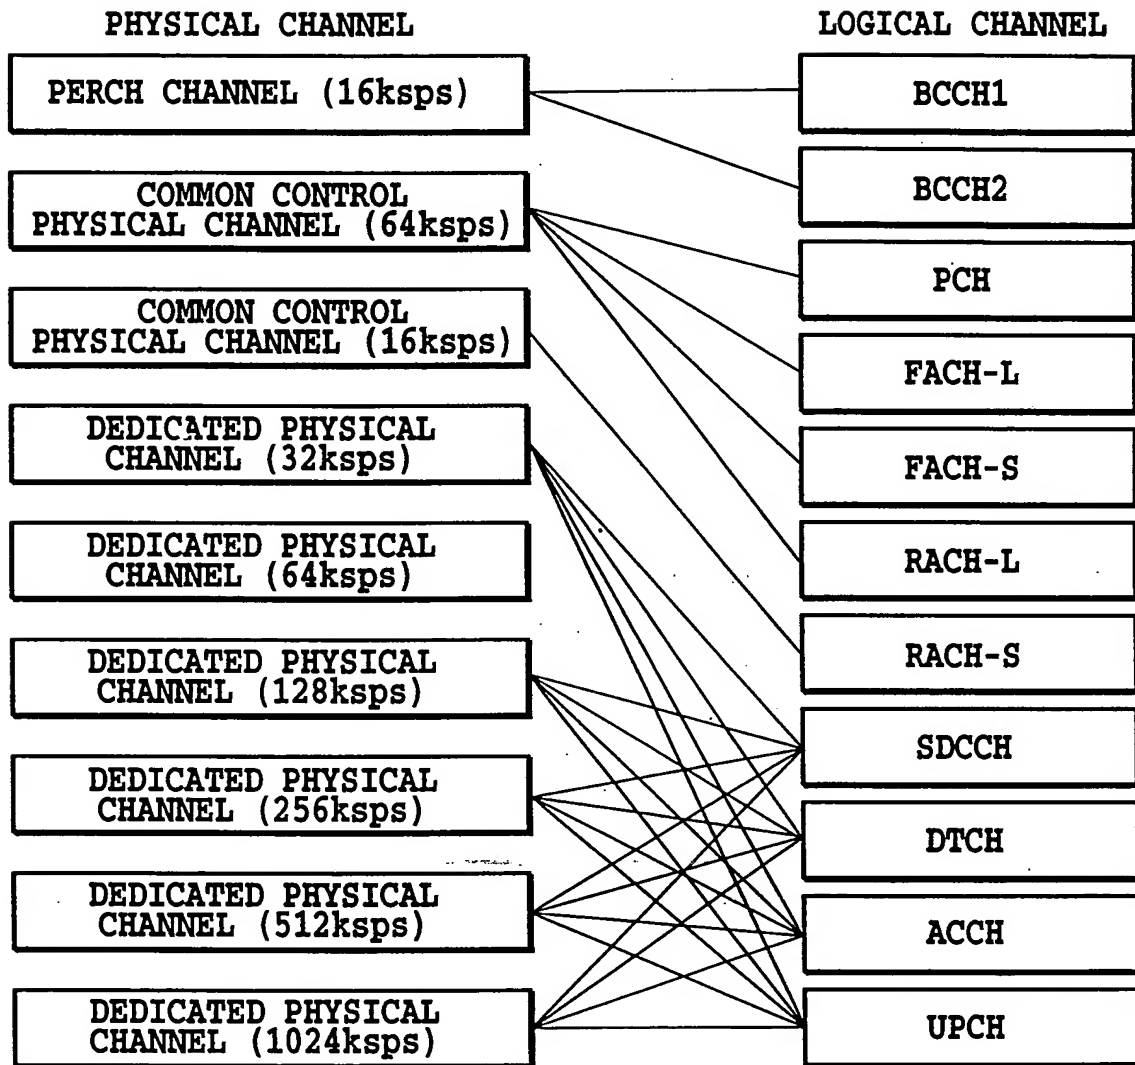


FIG.8

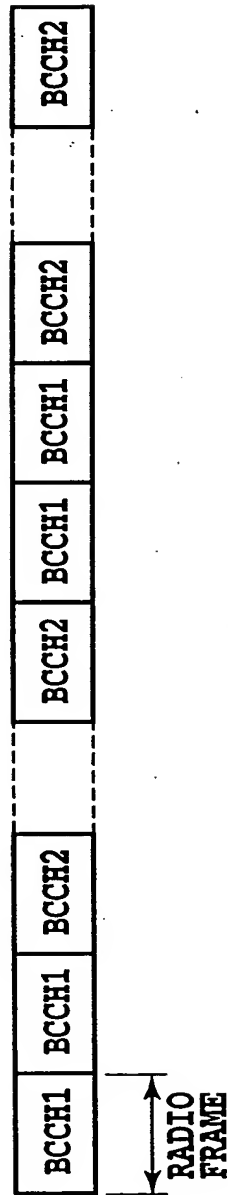


FIG.9

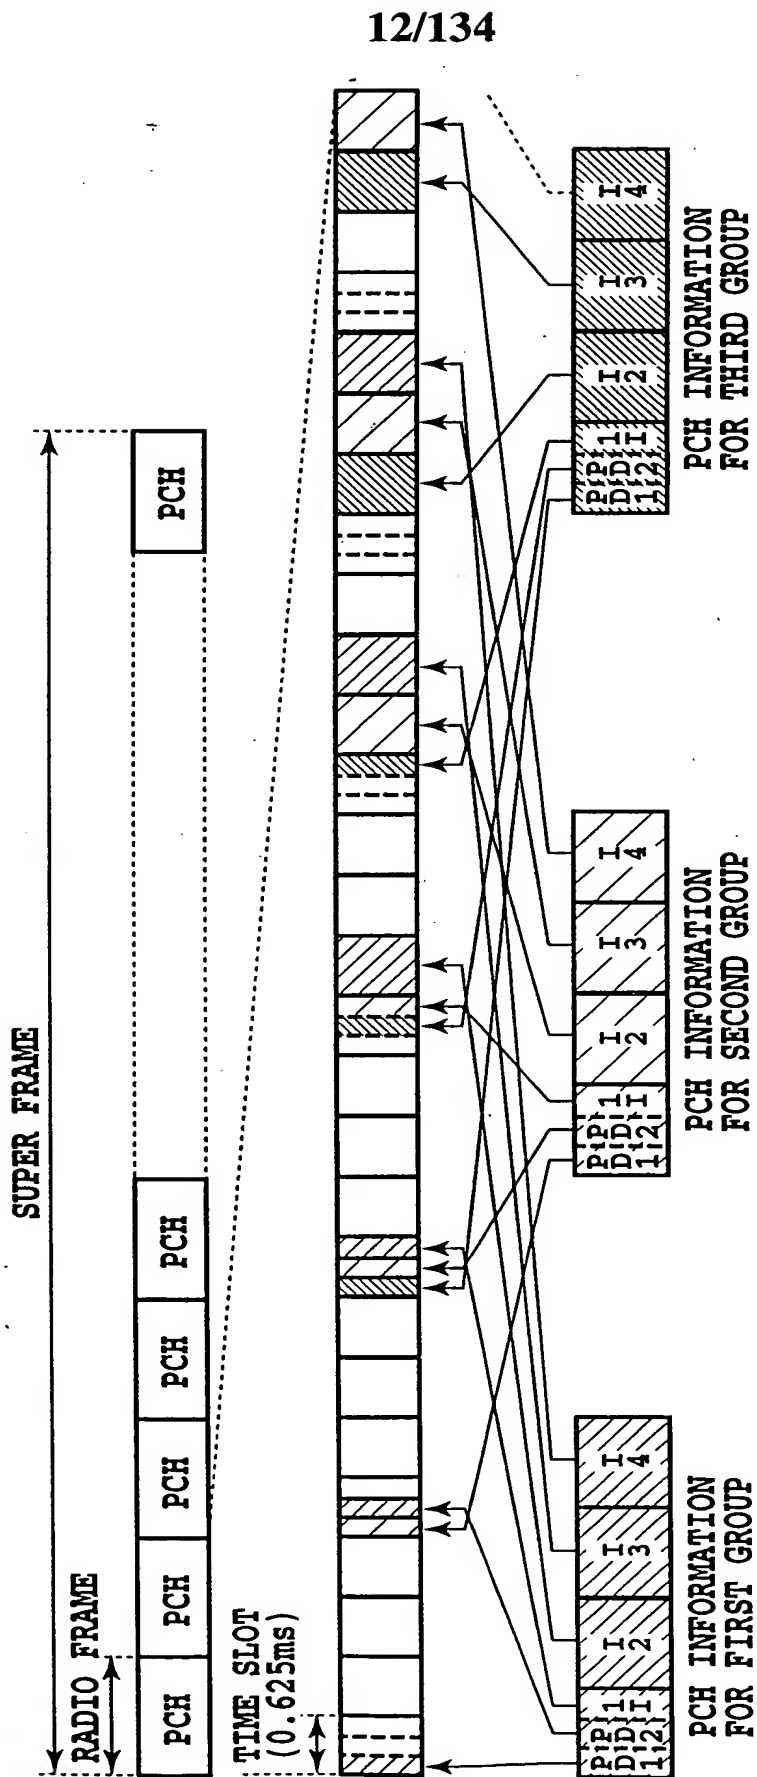


FIG.10

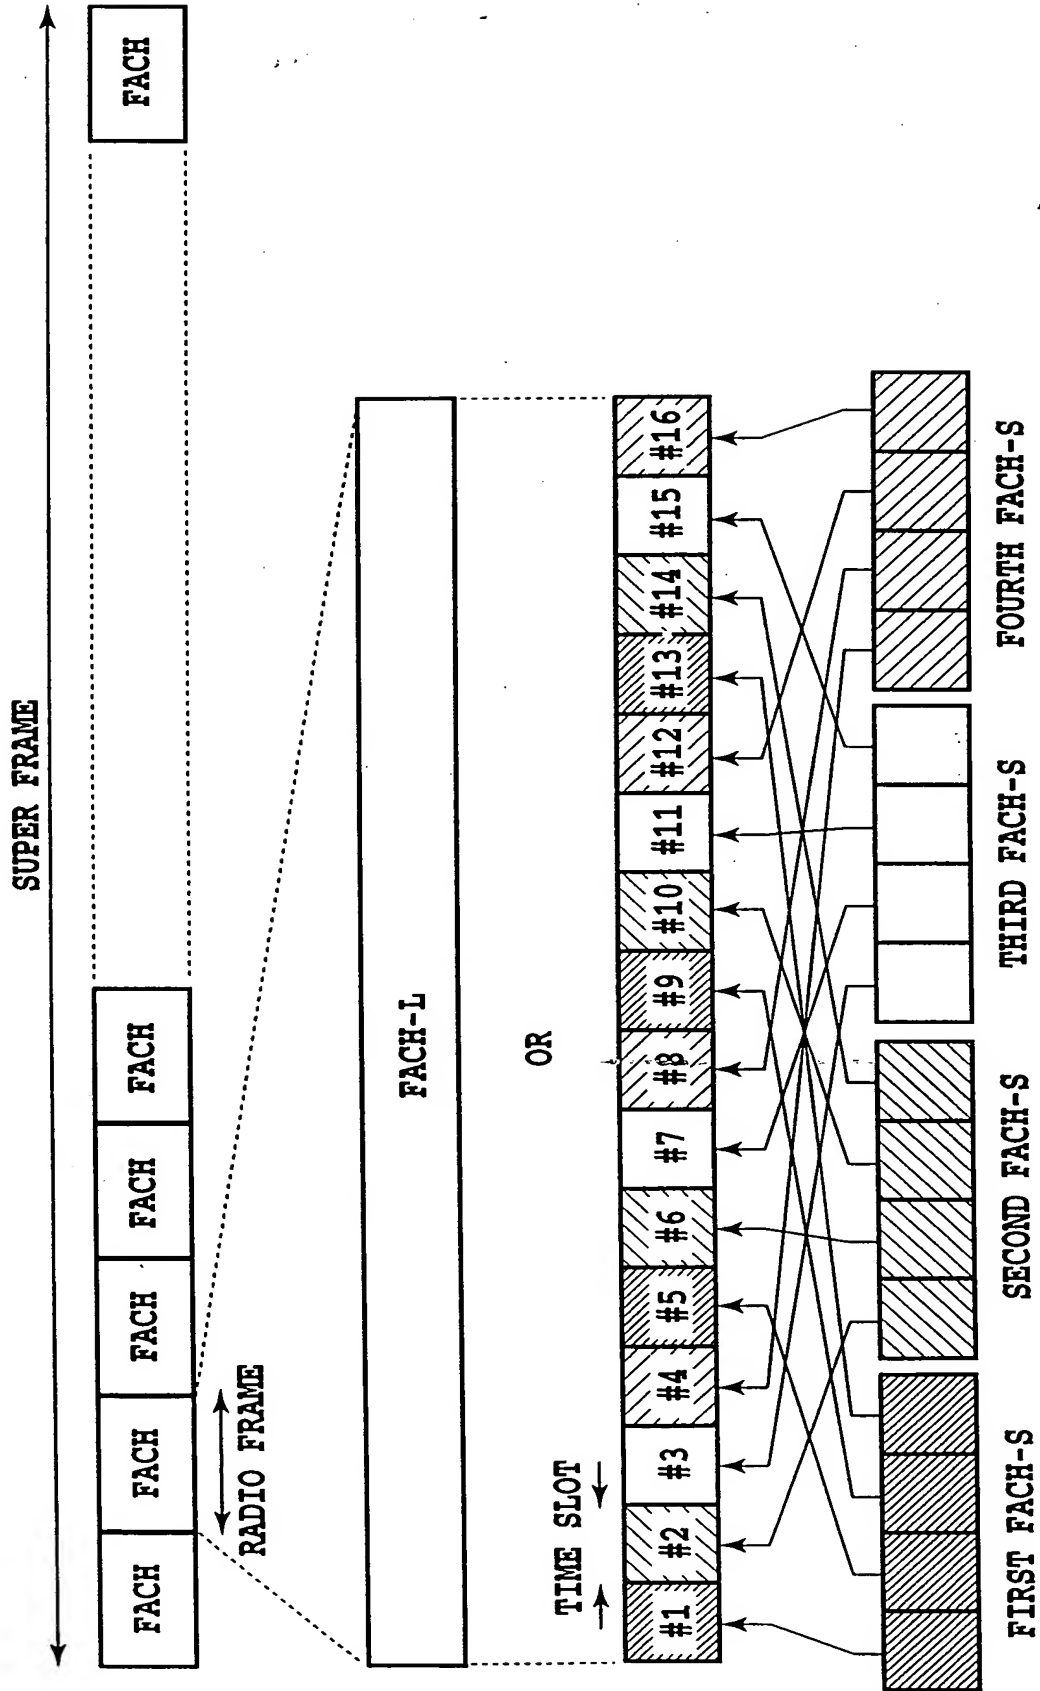


FIG.11

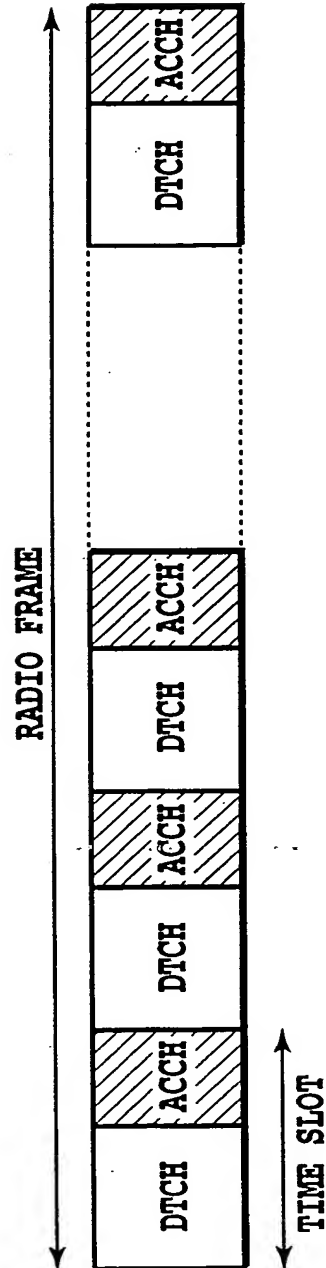


FIG.12



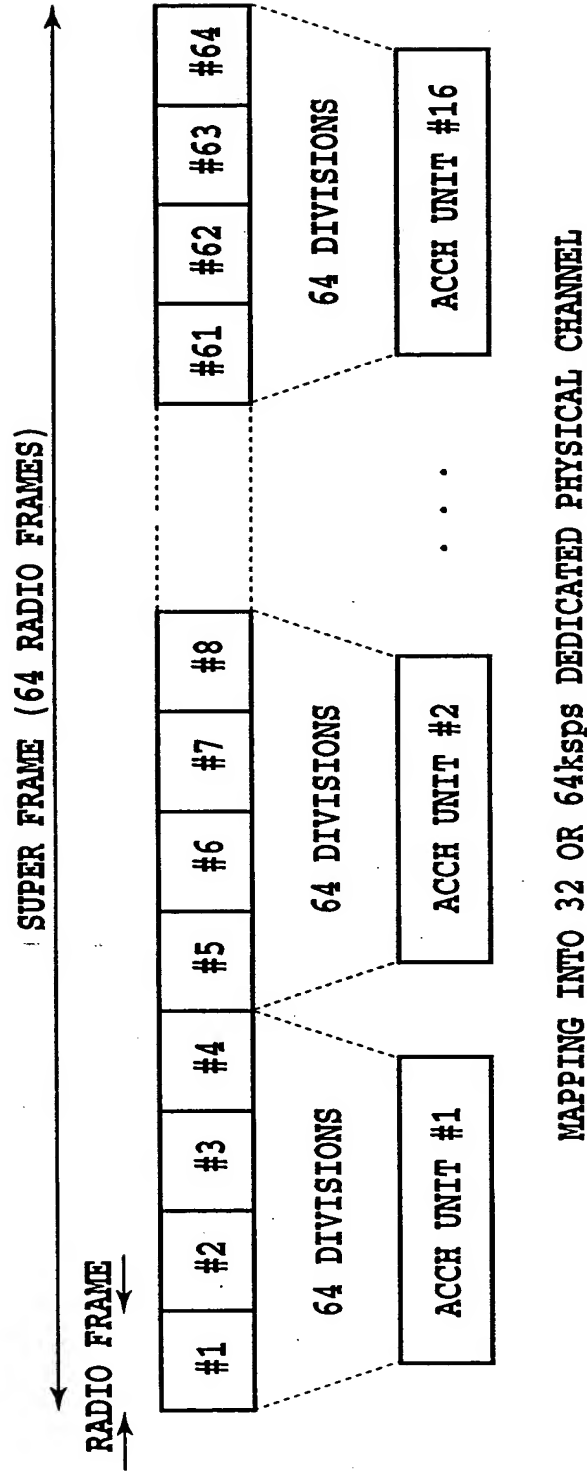


FIG.13A

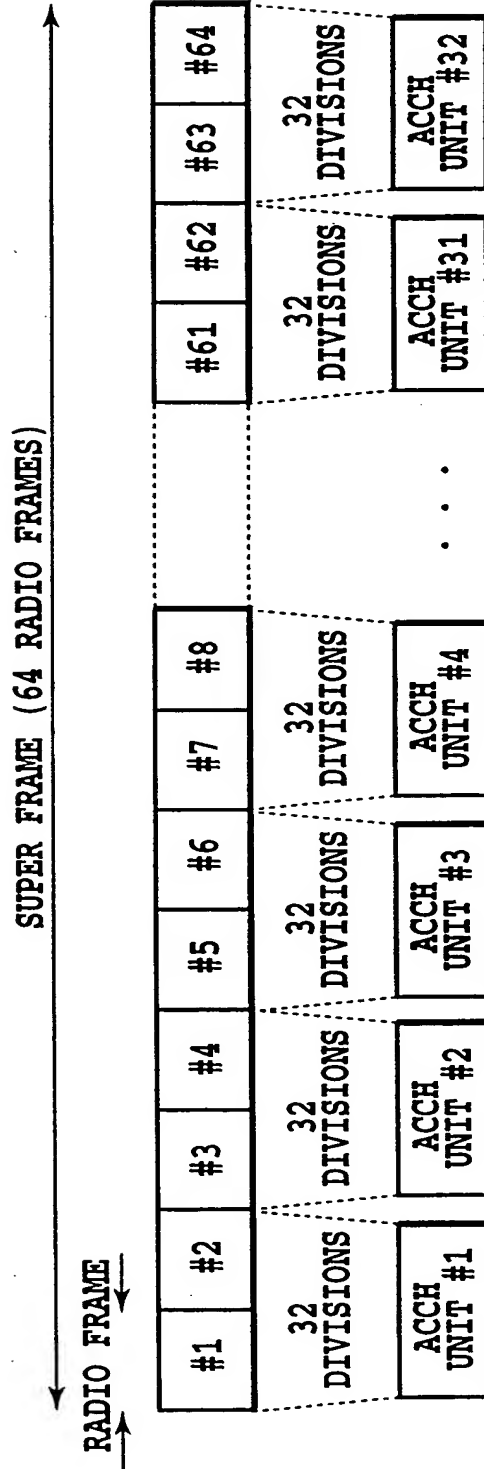

MAPPING INTO 128ksps DEDICATED PHYSICAL CHANNEL

FIG.13B

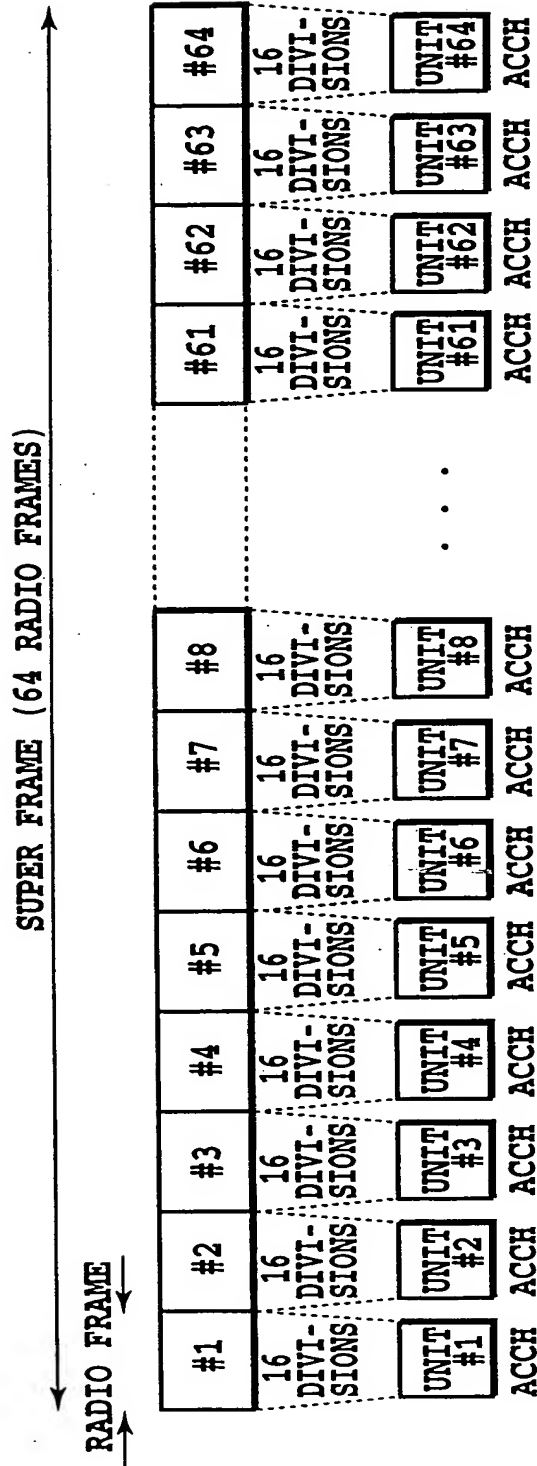

MAPPING INTO 256ksps DEDICATED PHYSICAL CHANNEL

FIG.13C

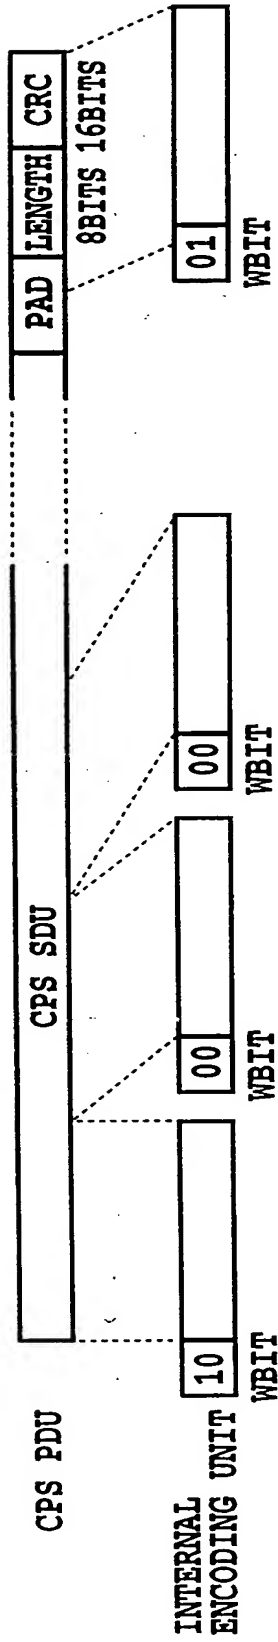


FIG.14


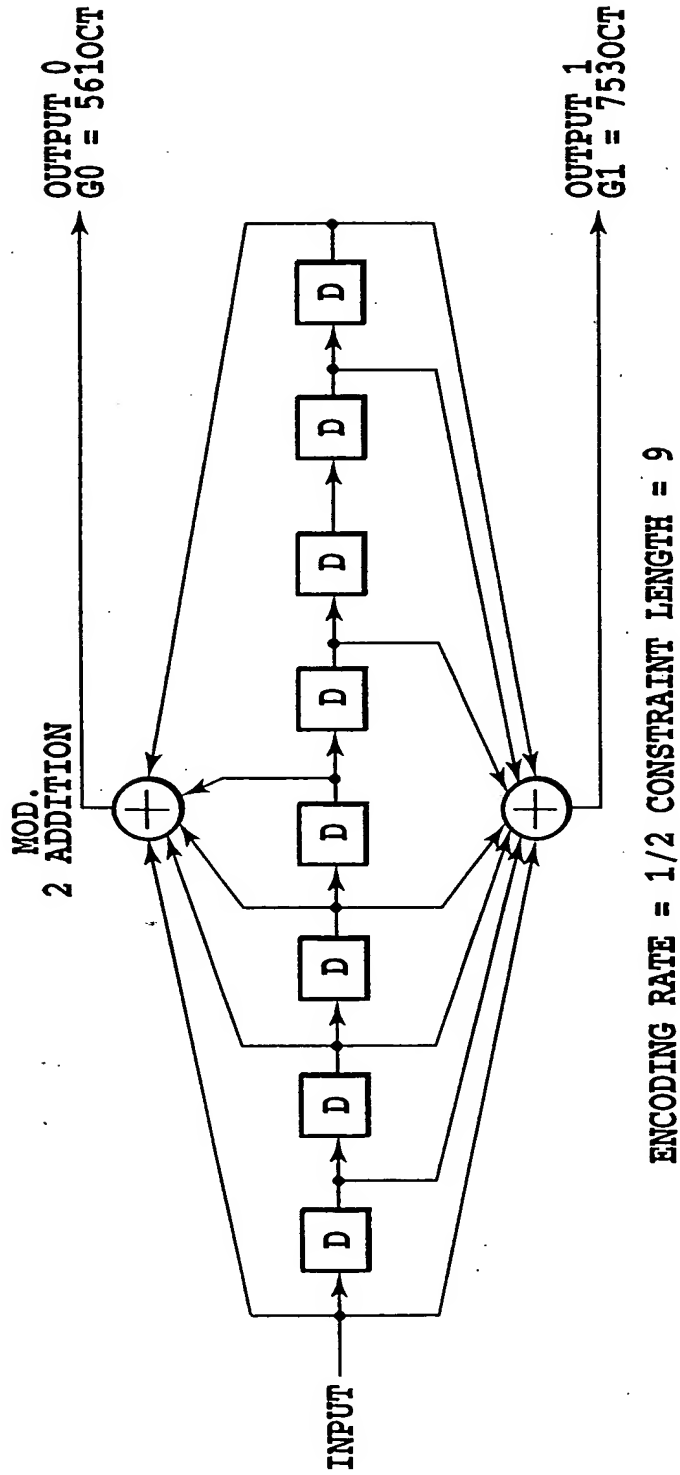


FIG.15A

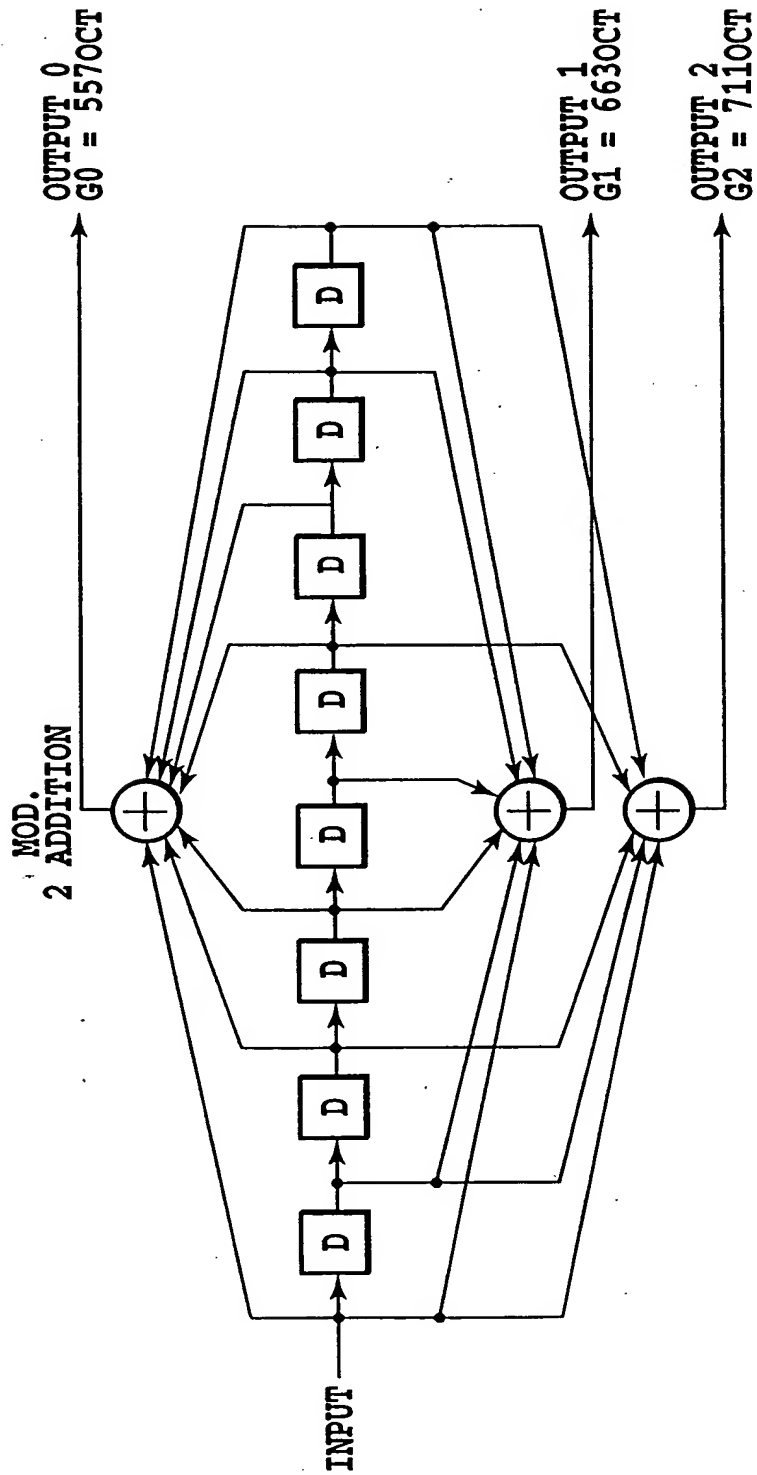

ENCODING RATE = 1/3 CONSTRAINT LENGTH = 9

FIG.15B

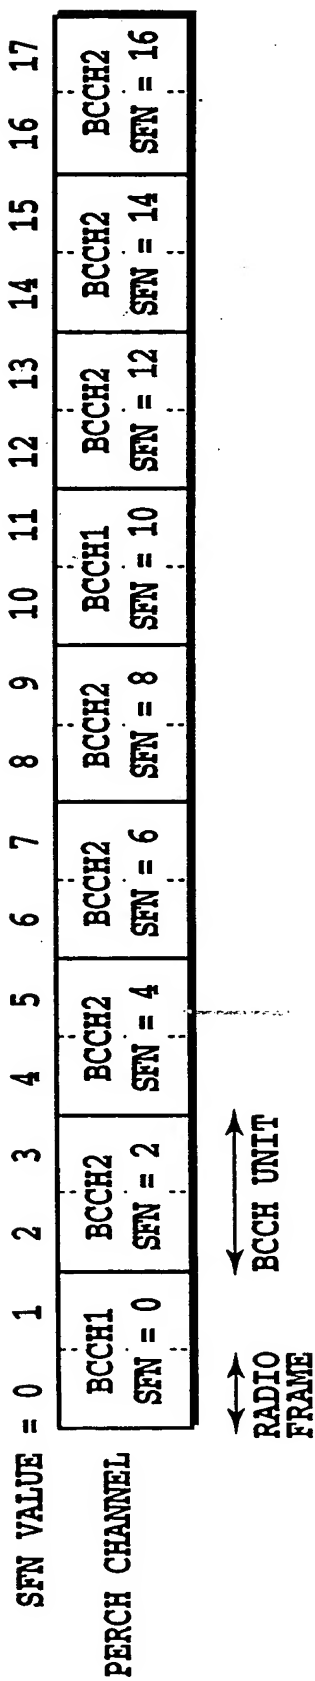


FIG.16

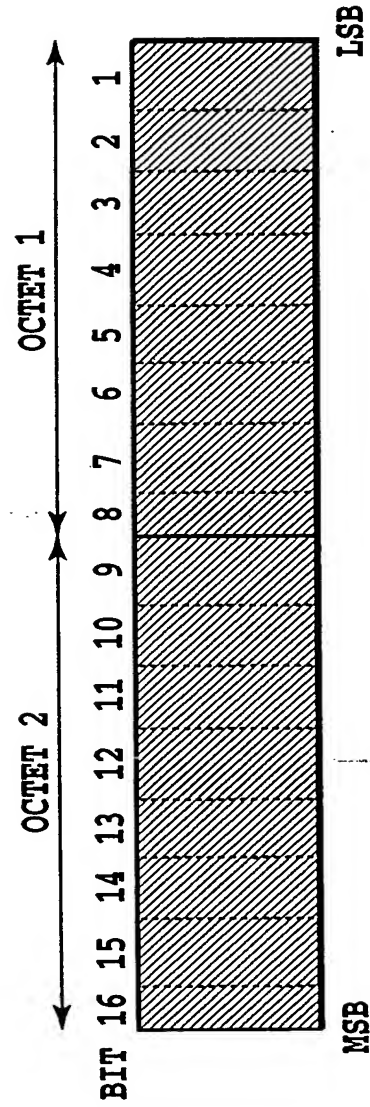


FIG.17

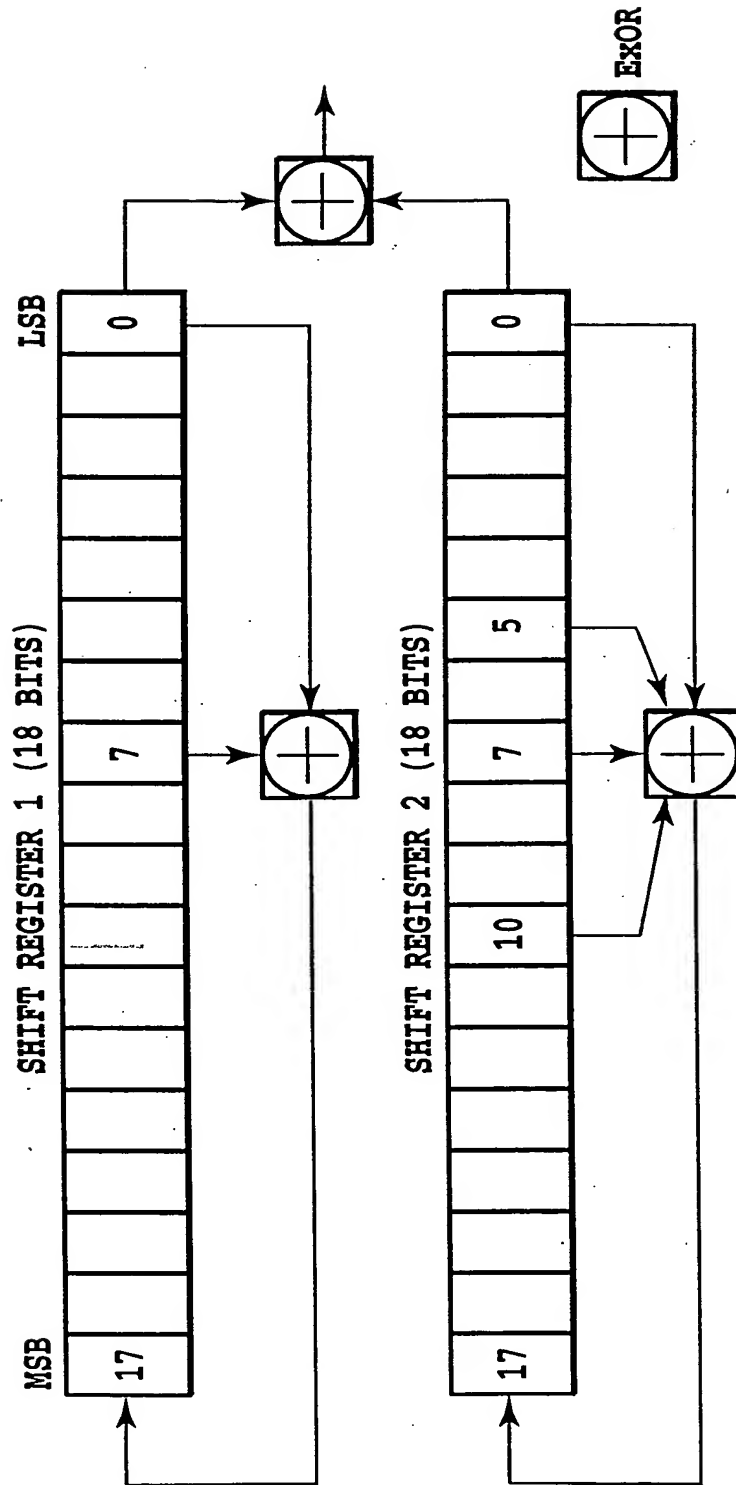


FIG.18

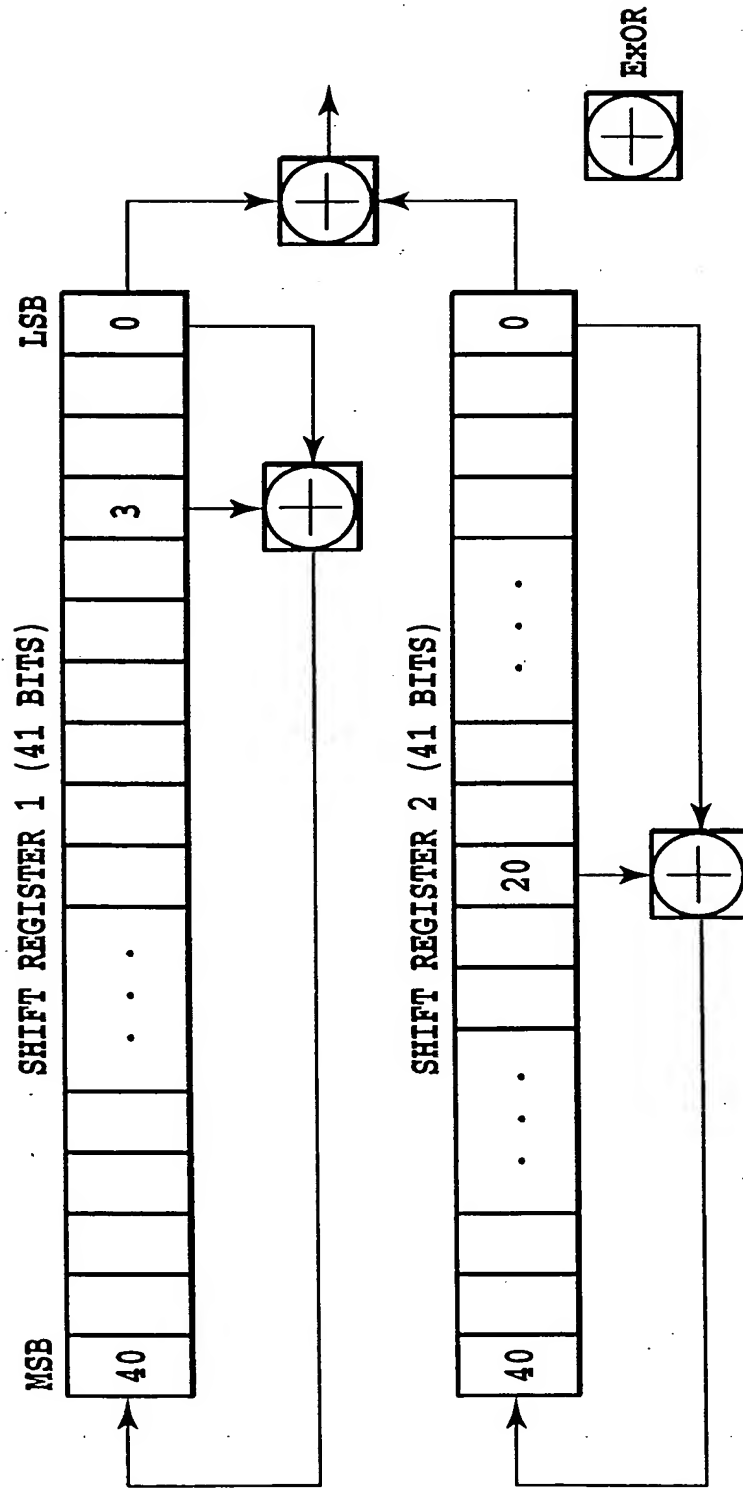


FIG.19

$$C_0(0)=1$$

$$\begin{bmatrix} C_1(0) \\ C_1(1) \end{bmatrix} = \begin{bmatrix} C_0(0) & \overline{C_0(0)} \\ C_0(0) & \overline{C_0(0)} \end{bmatrix} = \begin{bmatrix} 1 & 1 \\ 1 & 0 \end{bmatrix}$$

$$\begin{bmatrix} C_2(0) \\ C_2(1) \\ C_2(2) \\ C_2(3) \end{bmatrix} = \begin{bmatrix} C_1(0) & \overline{C_1(0)} \\ C_1(0) & \overline{C_1(0)} \\ C_1(1) & \overline{C_1(1)} \\ C_1(1) & \overline{C_1(1)} \end{bmatrix} = \begin{bmatrix} 1 & 1 & 1 & 1 \\ 1 & 1 & 0 & 0 \\ 1 & 0 & 1 & 0 \\ 1 & 0 & 0 & 1 \end{bmatrix}$$

$$\vdots$$

$$\begin{bmatrix} C_{n+1}(0) \\ C_{n+1}(1) \\ C_{n+1}(2) \\ C_{n+1}(3) \\ \vdots \\ C_{n+1}(2^{n+1}-2) \\ C_{n+1}(2^{n+1}-1) \end{bmatrix} = \begin{bmatrix} C_n(0) & \overline{C_n(0)} \\ C_n(0) & \overline{C_n(0)} \\ C_n(1) & \overline{C_n(1)} \\ C_n(1) & \overline{C_n(1)} \\ \vdots & \vdots \\ C_n(2^{n-1}) & \overline{C_n(2^{n-1})} \\ C_n(2^{n-1}) & \overline{C_n(2^{n-1})} \end{bmatrix}$$

FIG.20

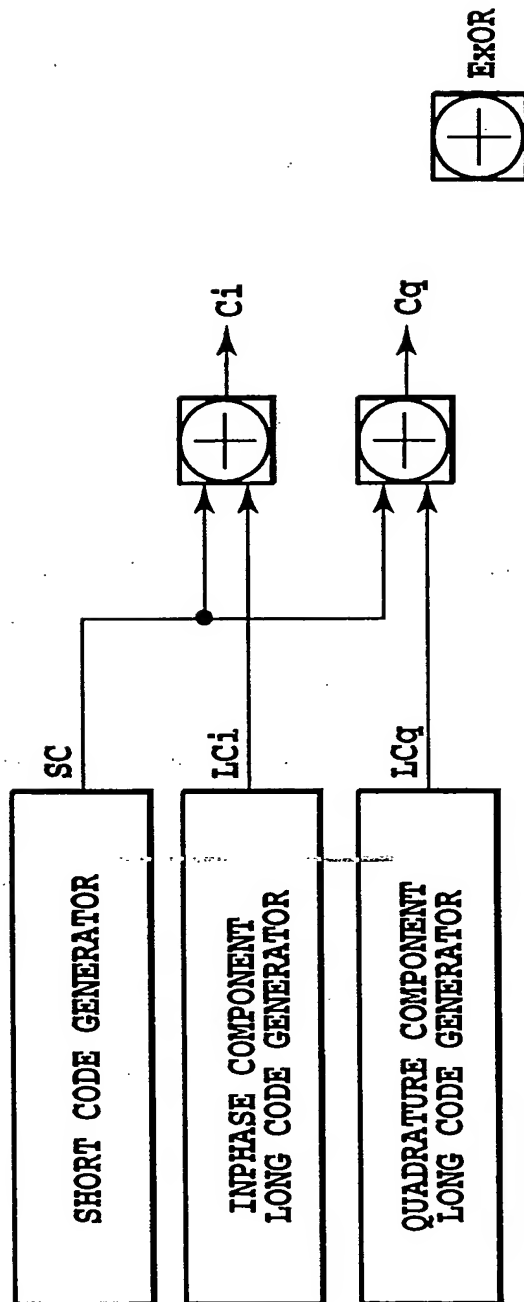


FIG.22

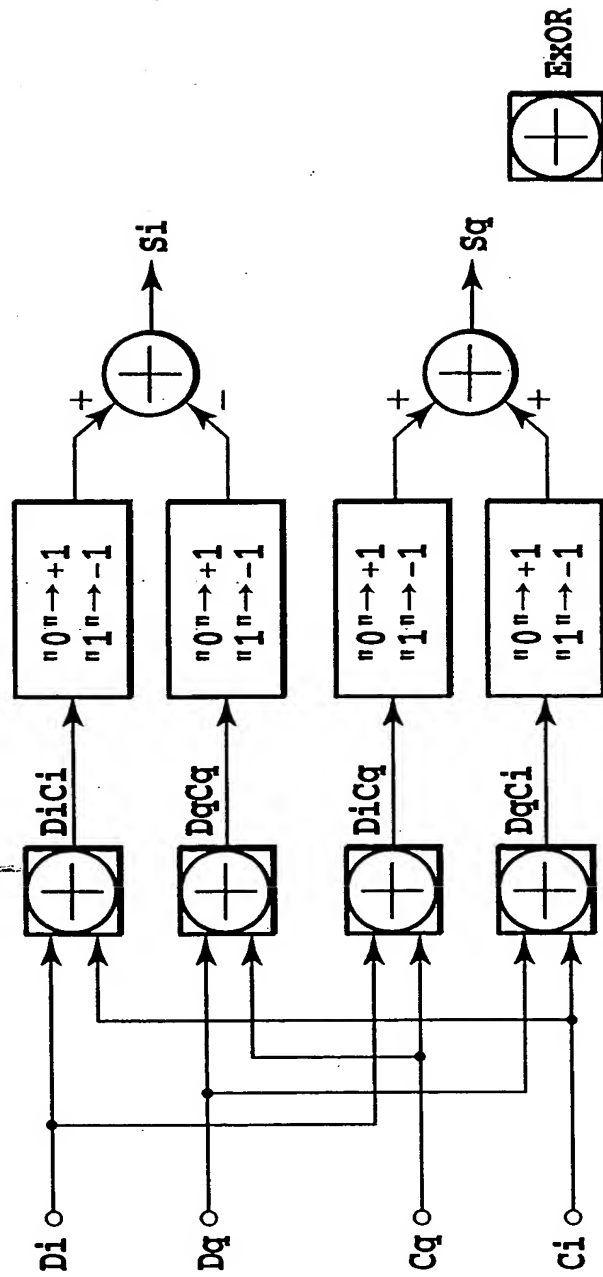


FIG.23

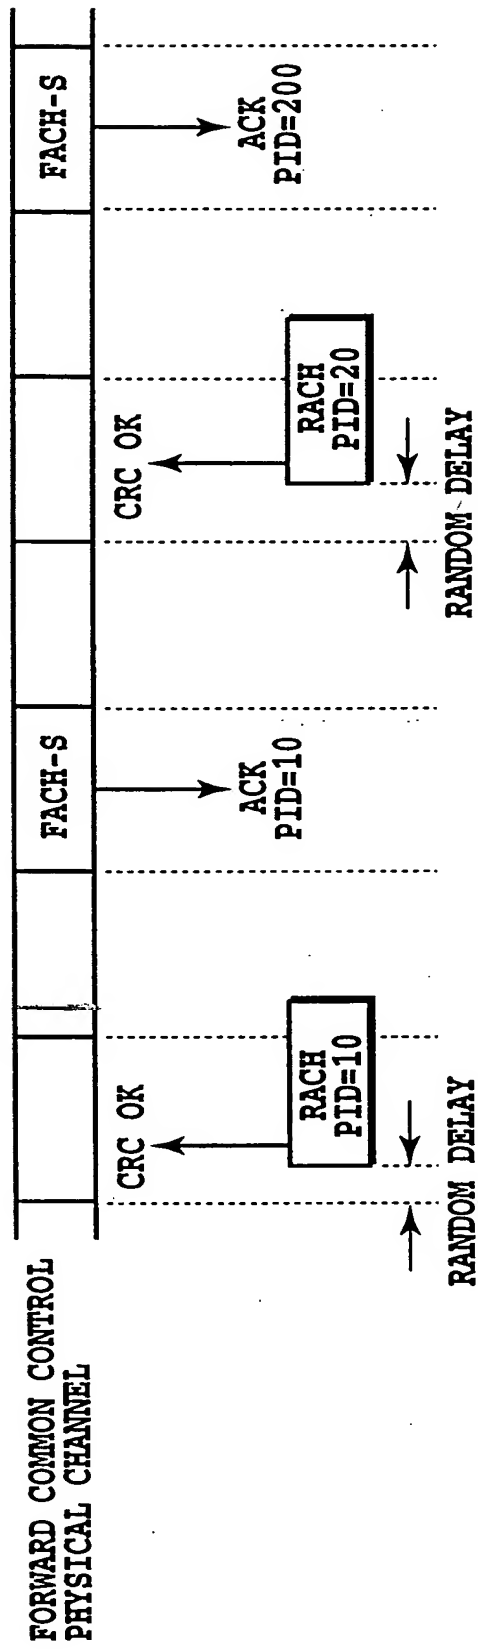


FIG.24

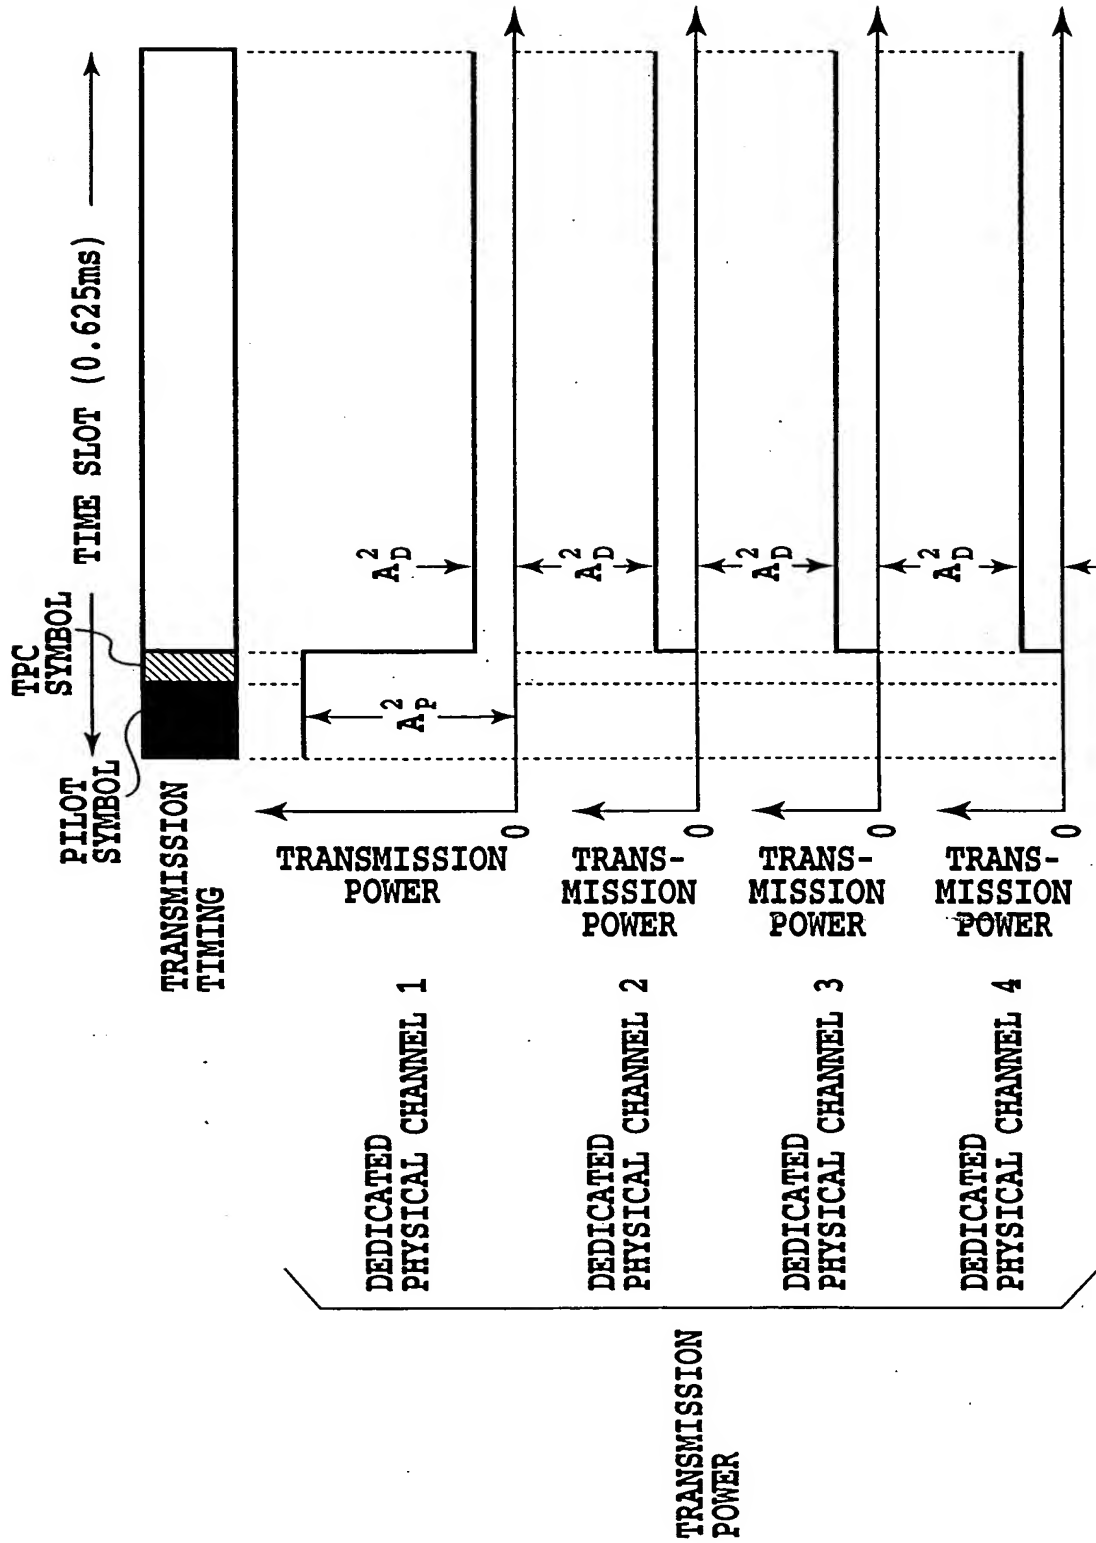


FIG.25

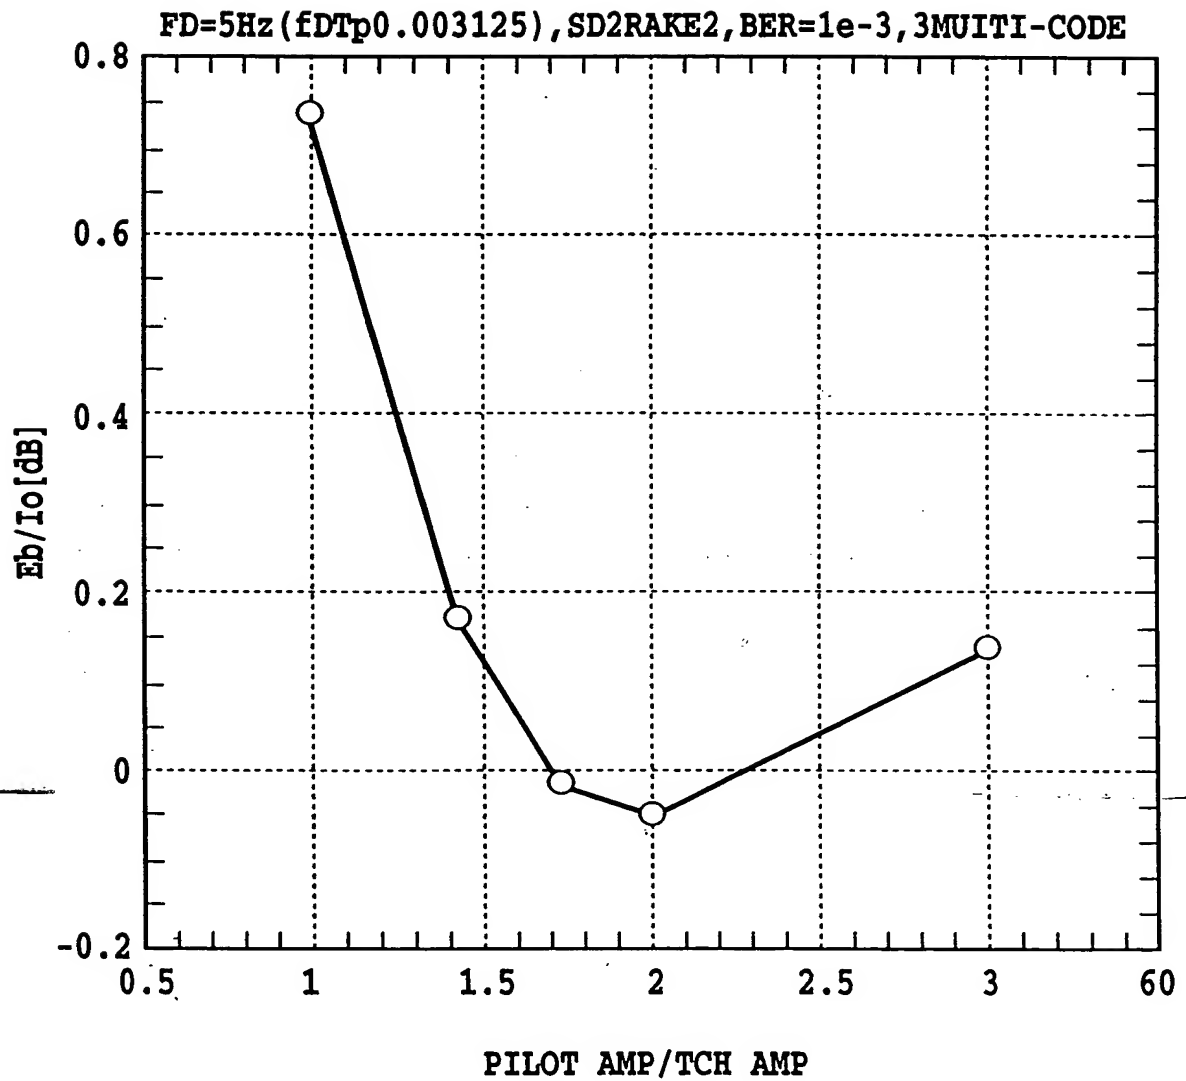


FIG.26

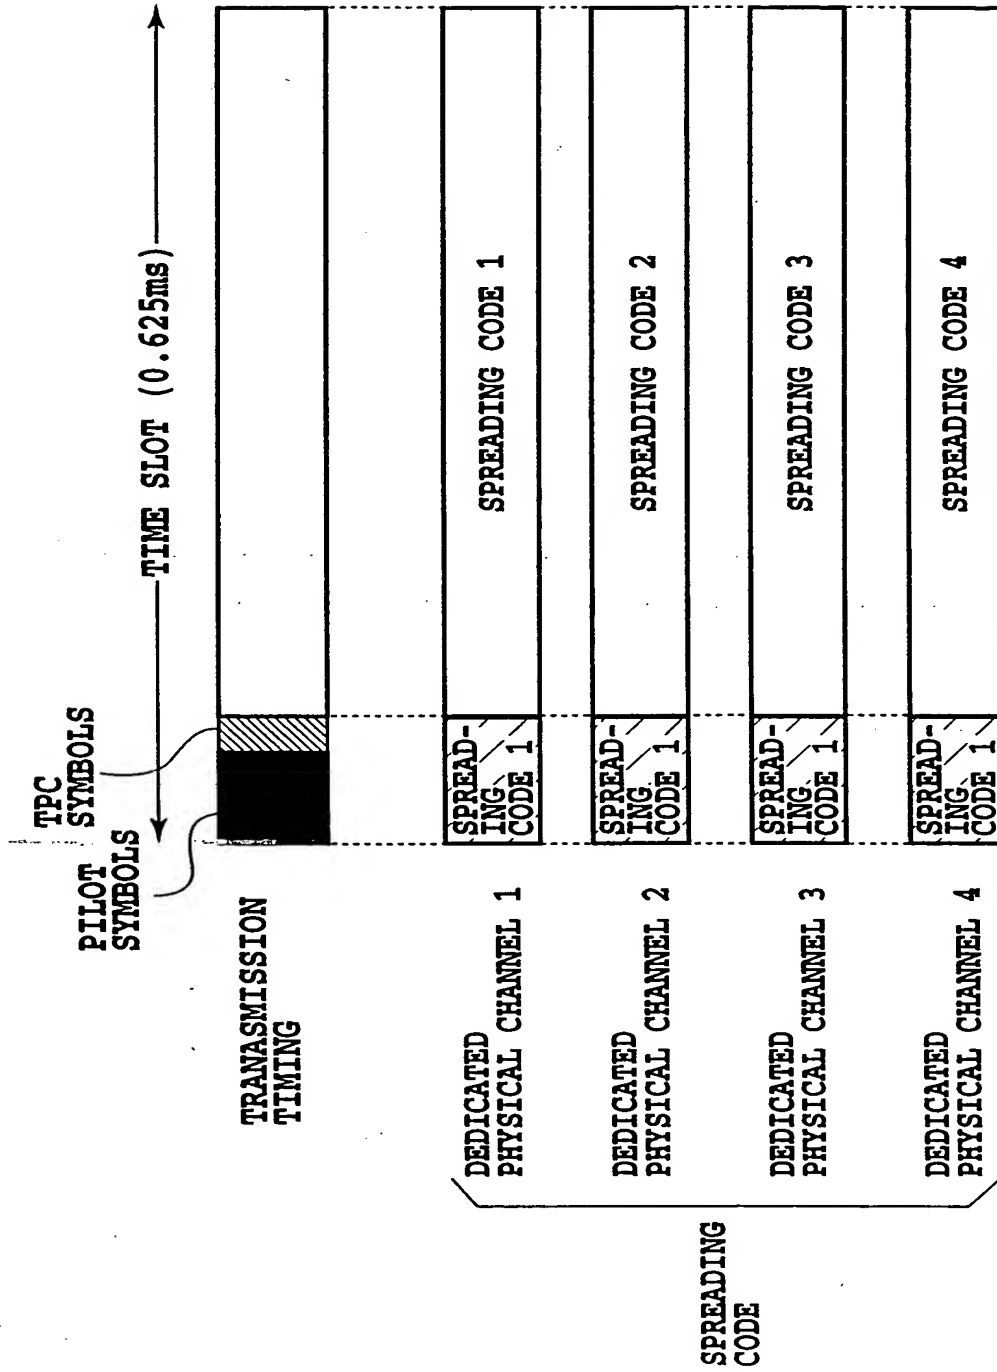


FIG.27


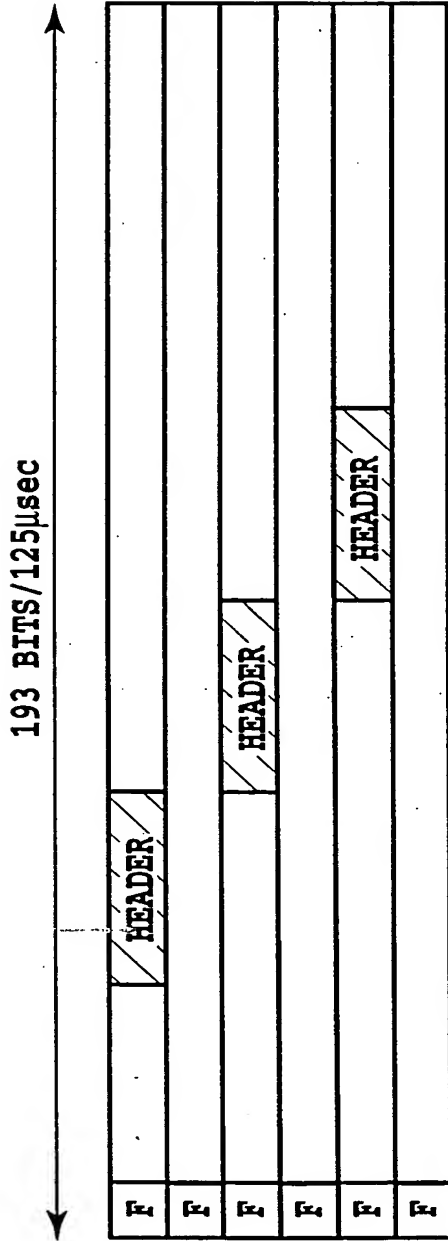


FIG.28A

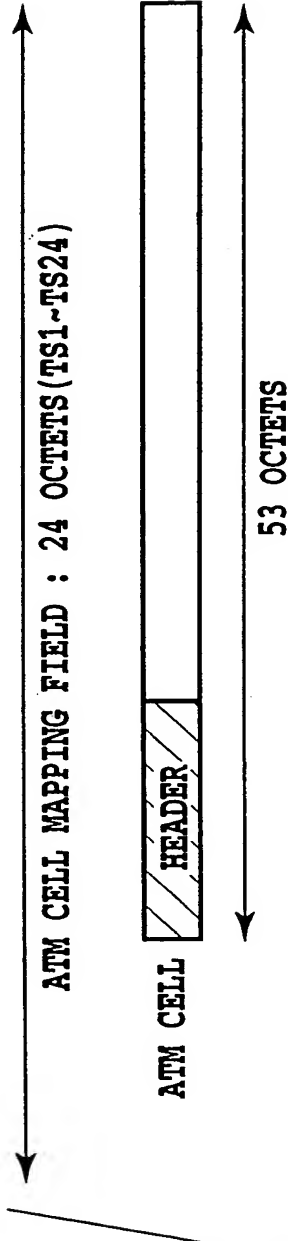

- PROVIDES F3 OAM FUNCTIONS:
- DETECTION OF LOSS FRAME ALIGNMENT
 - PERFORMANCE MONITORING(CRC-6)
 - TRANSMISSION OF FERF AND LOC
 - PERFORMANCE REPORTING

FIG.28B

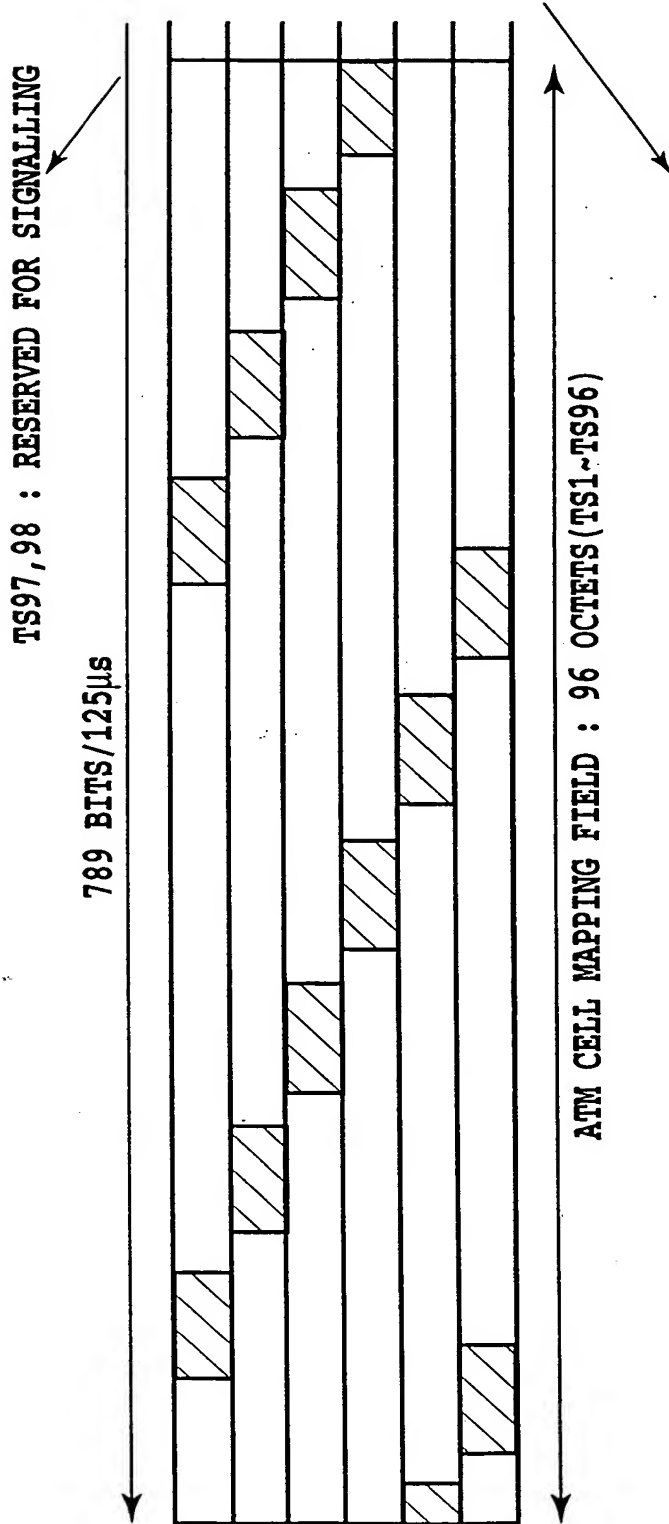


FIG.29A

PROVIDES F3 OAM FUNCTIONS:

- DETECTION OF LOSS FRAME ALIGNMENT
- PERFORMANCE MONITORING(CRC-5)
- TRANSMISSION OF FERF AND LOC
- PERFORMANCE REPORTING


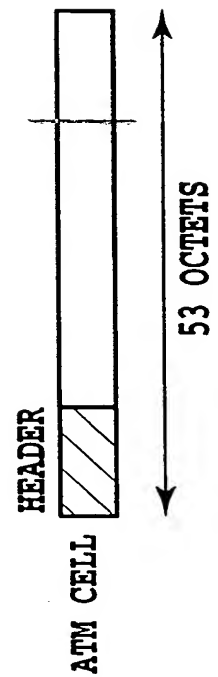


FIG.29B

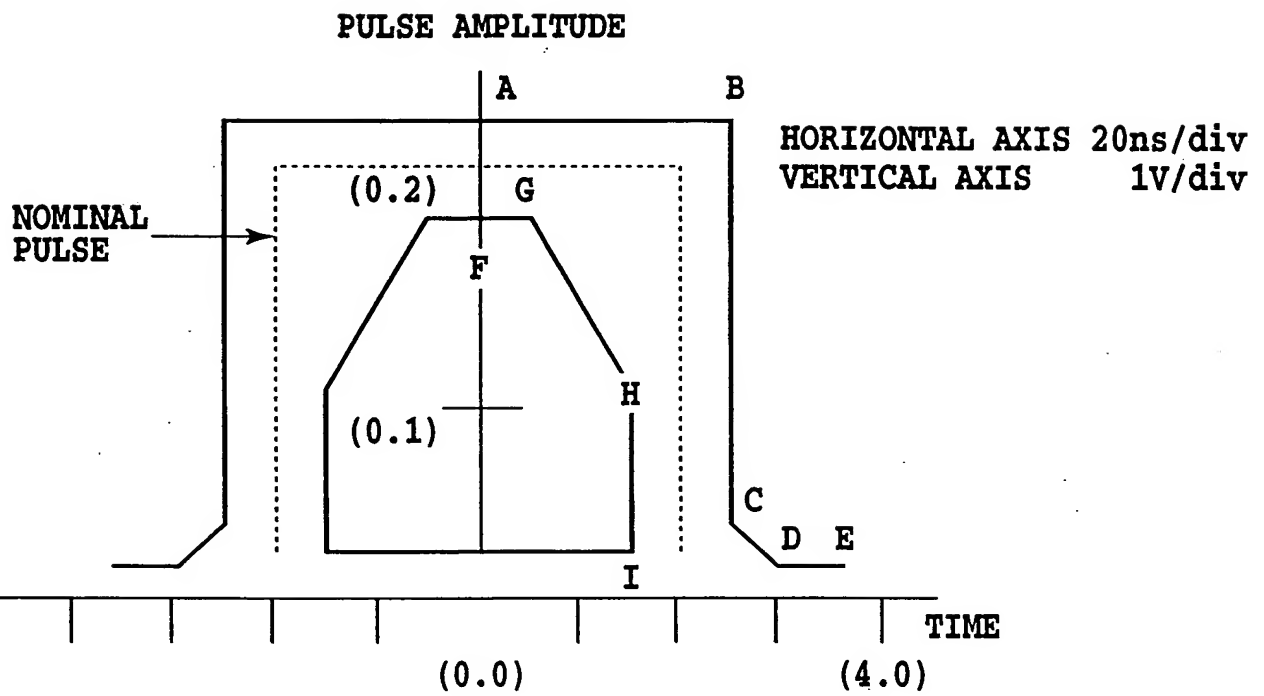

COORDINATES OF INTERSECTION POINTS

A : (0, 2.3)
B : (2.4, 2.3)
C : (2.4, 1.0)
D : (3.2, 0.3)
E : (4.0, 0.3)

```
F : ( 0, 1.7)
G : (0.4, 1.7)
H : (1.6, 0.9)
I : (1.6, 0.3)
```

FIG.30

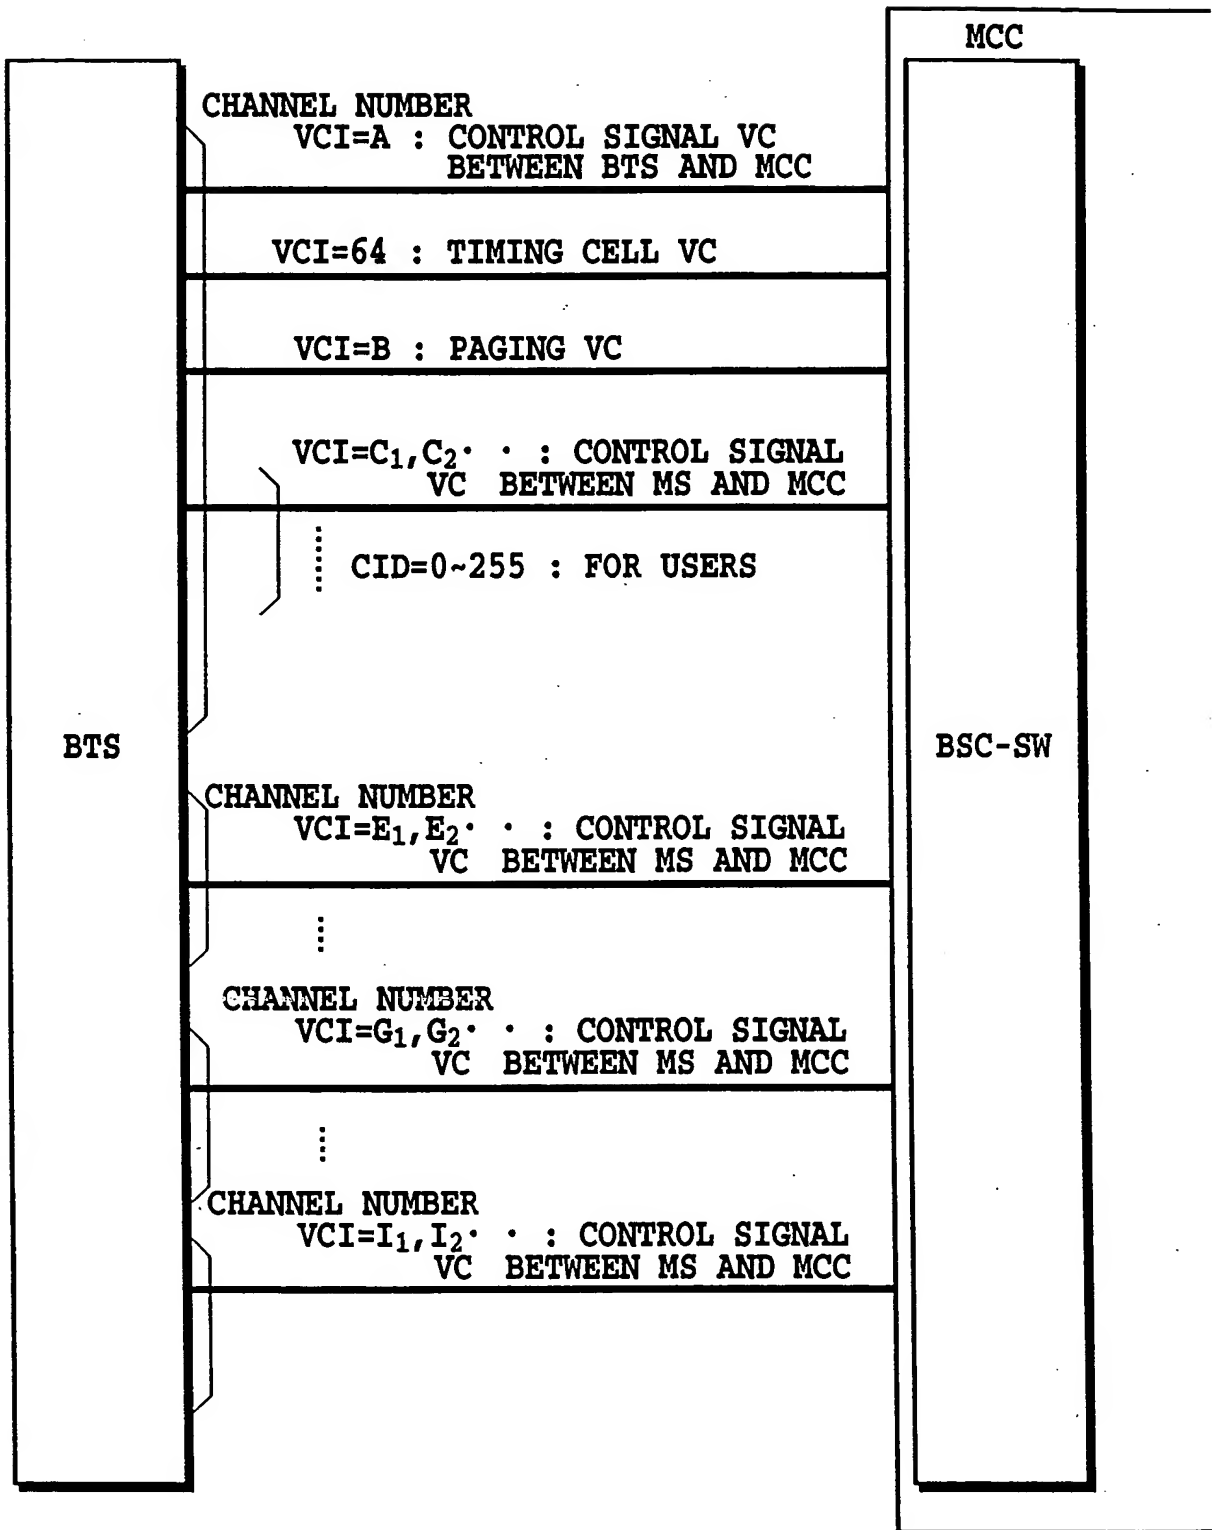


FIG.31

37/134

	BIT	8	0	
OCT 1			00H	CELL HEADER
OCT 2			00H	
OCT 3			00H	
OCT 4			01H	
OCT 5			52H	
OCT 6			6AH	
OCT 1			6AH	

FIG.32

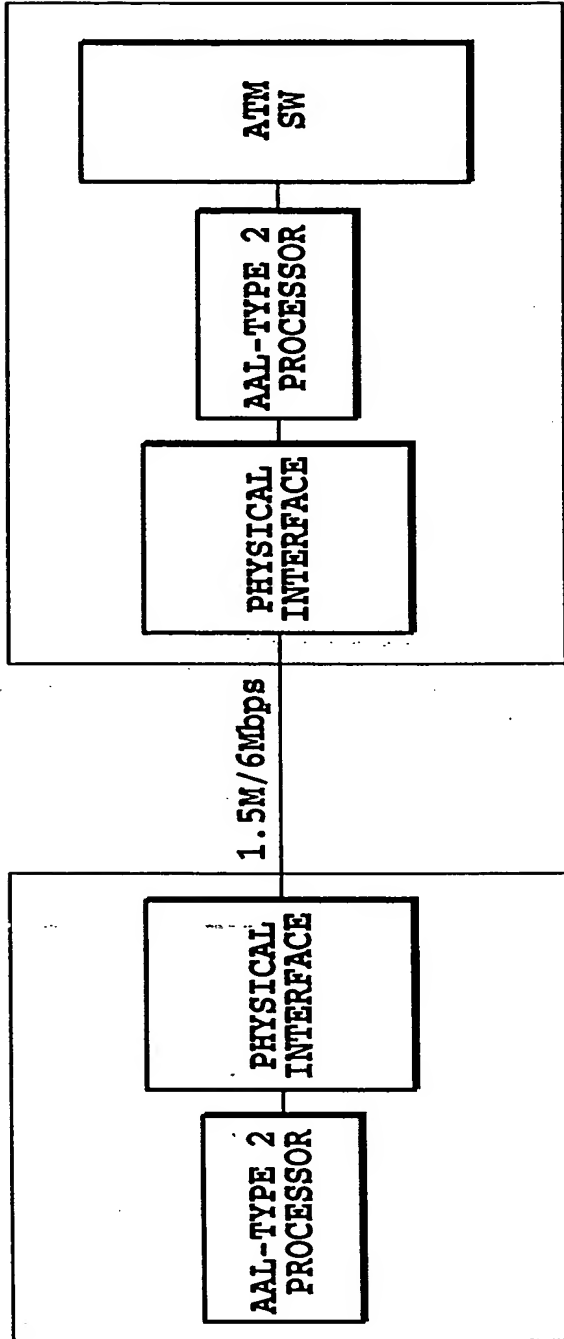


FIG.33A

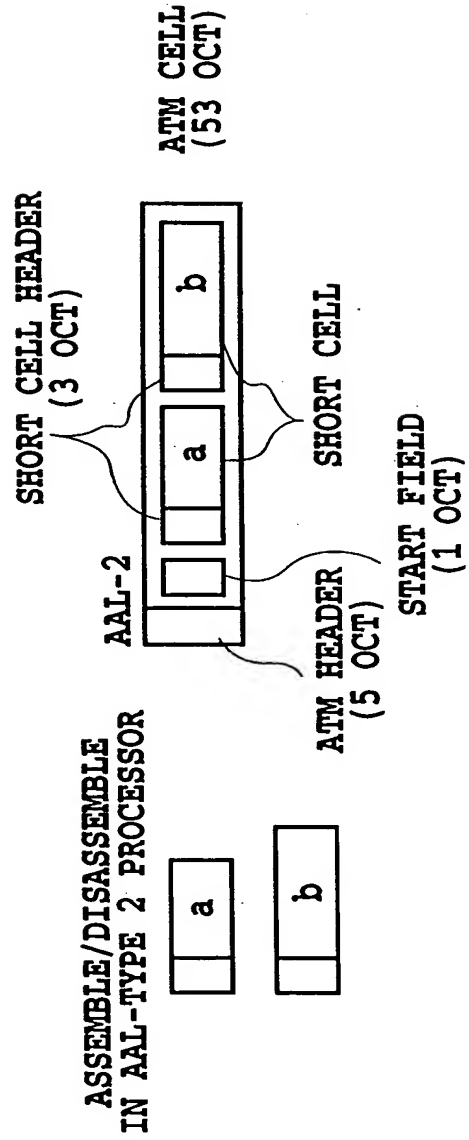


FIG.33B

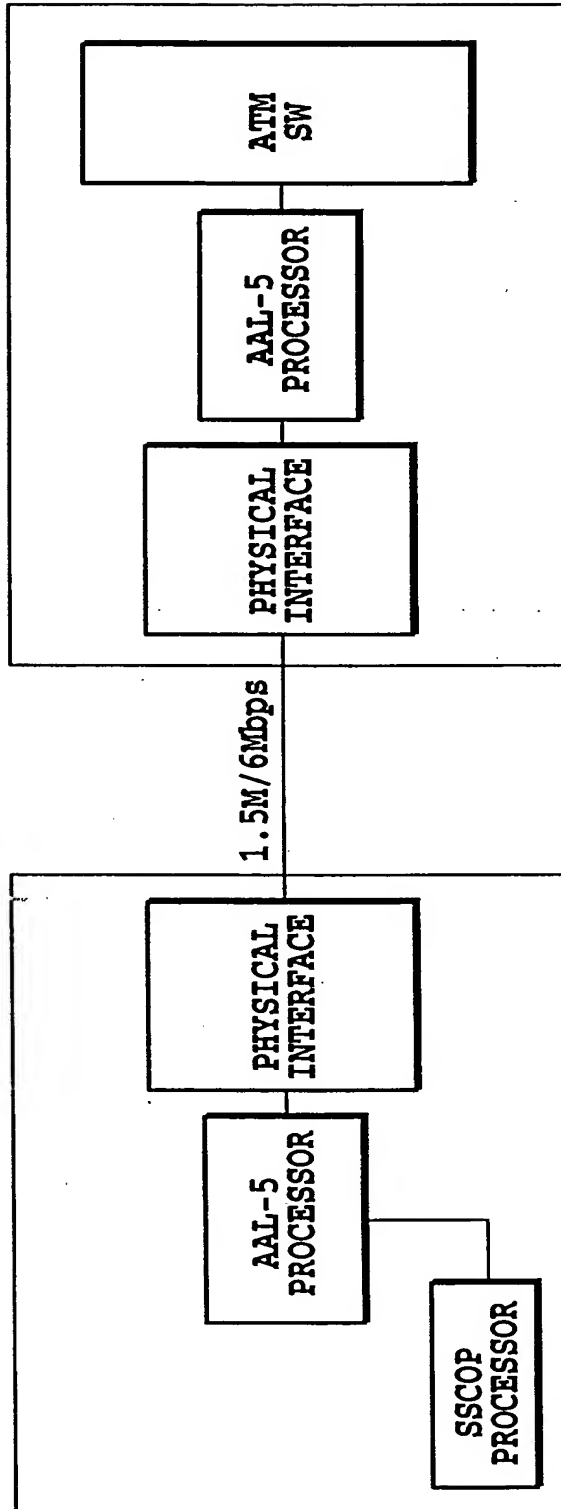


FIG.34A

ASSEMBLE/DISASSEMBLE
IN AAL-5 PROCESSOR

AAL-5


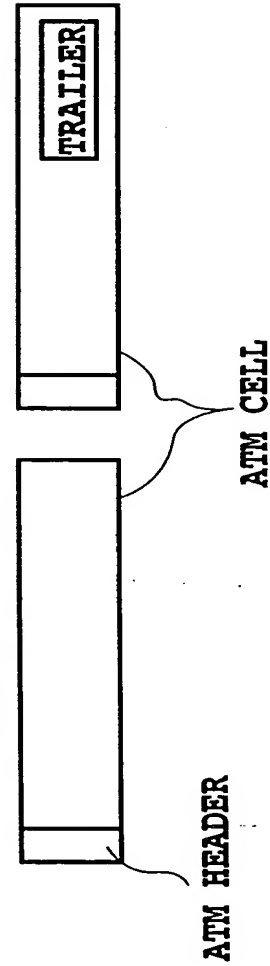


FIG.34B

40/134

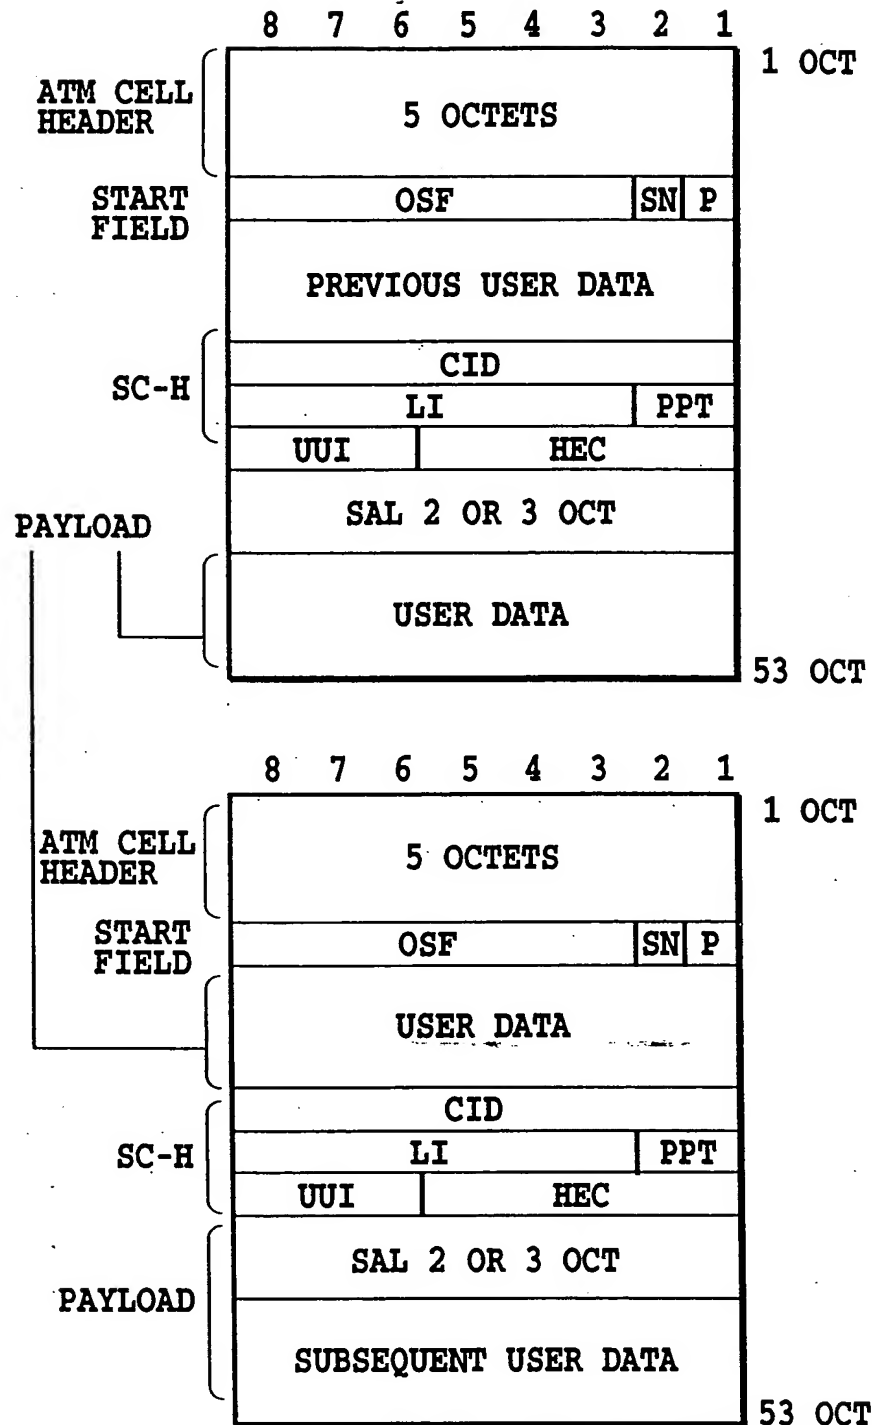

- START FIELD (1 OCTET)
- OSF: OFFSET FIELD

FIG.35

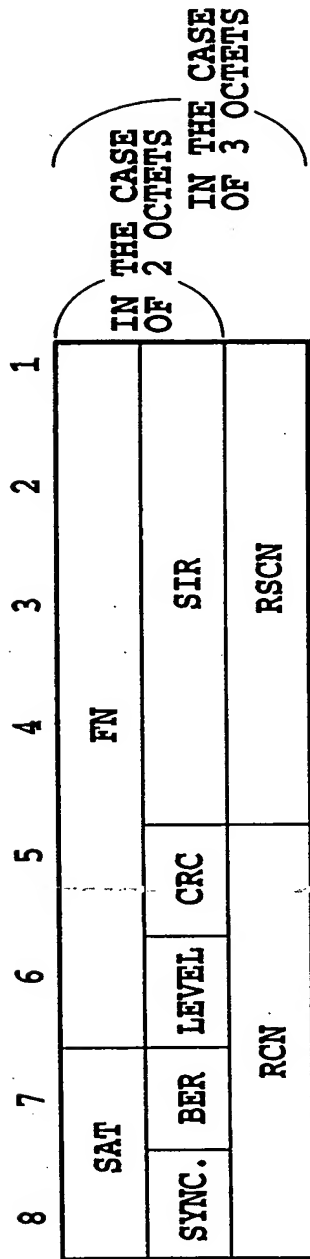


FIG.36

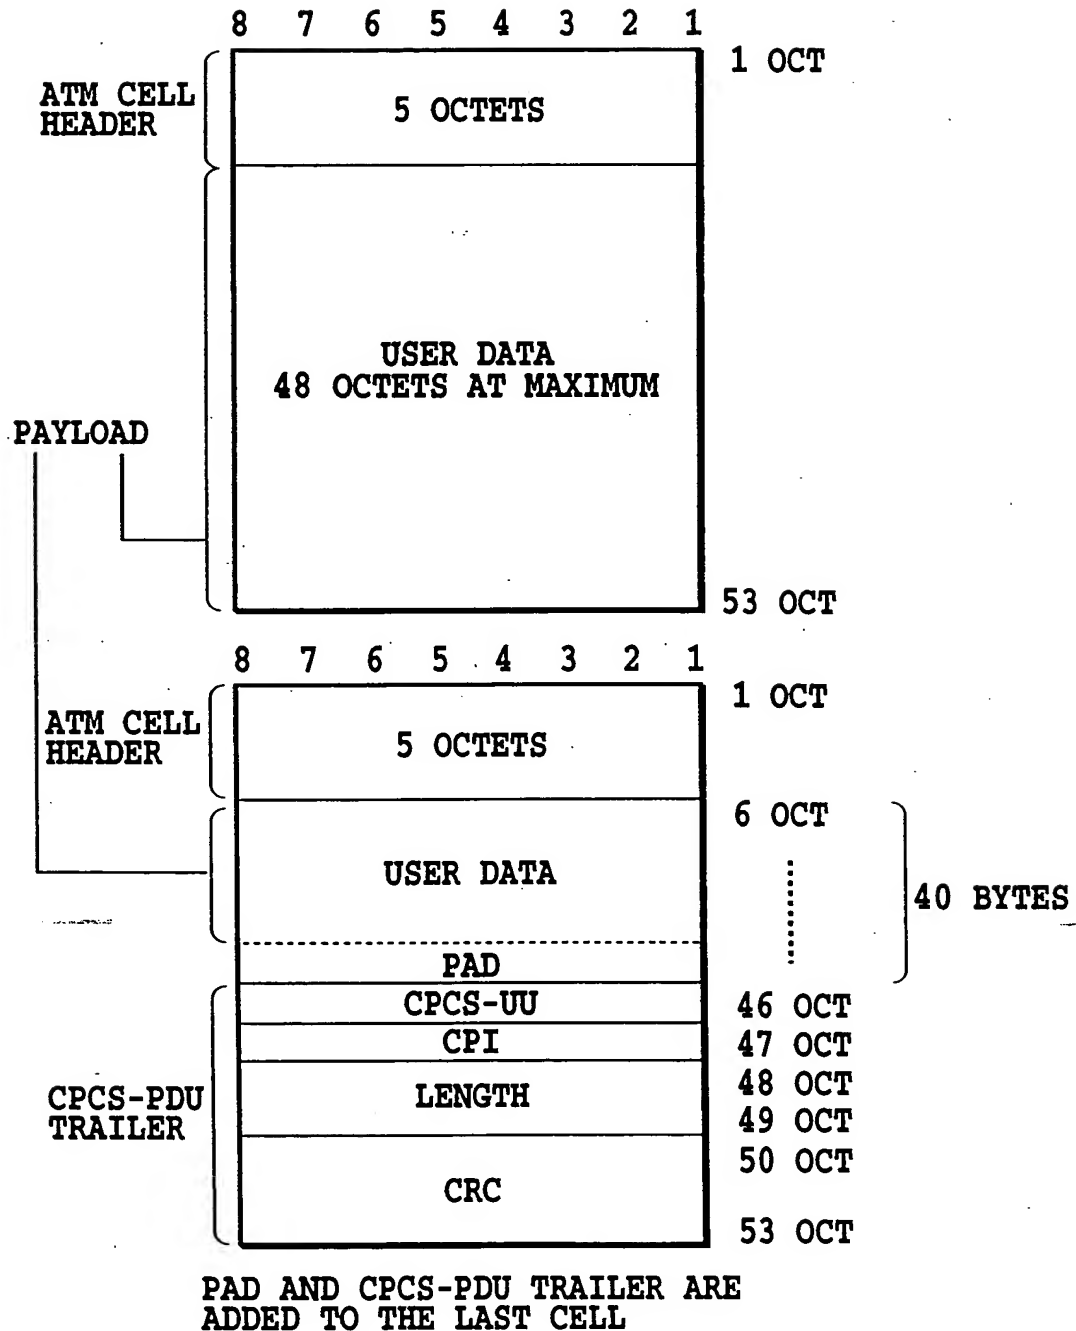


FIG.37

FIG.38

FIG.38A

FIG.38B

ATM HEADER

VPI		
VCI		
PTI		CLP
HEC		
MESSAGE ID		
NUMBER OF TIMES OF CORRECTIONS (1 OCTET)		
CORRECTION RANGE (1 OCTET)		
TRANSMISSION DELAY (2 OCTET)		
SF TIME INFORMATION (RECEPTION) (MASTER SIDE) (2 OCTETS)		
SF TIME INFORMATION (TRANSMISSION) (MASTER SIDE) (2 OCTETS)		

FIG.38A

SF TIME INFORMATION (RECEPTION) (SLAVE SIDE) (2 OCTETS)
SF TIME INFORMATION (TRANSMISSION) (SLAVE SIDE) (2 OCTETS)
SF PHASE SHIFT VALUE (2 OCTETS)
LC COUNTER INFORMATION (RECEPTION) (MASTER SIDE) (3 OCTETS)
LC COUNTER INFORMATION (TRANSMISSION) (MASTER SIDE) (3 OCTETS)
LC COUNTER INFORMATION (RECEPTION) (SLAVE SIDE) (3 OCTETS)
LC COUNTER INFORMATION (TRANSMISSION) (SLAVE SIDE) (3 OCTETS)
LC COUNTER SHIFT VALUE (3 OCTETS)
UNUSED (6A (h))
000000
CRC-10

FIG.38B

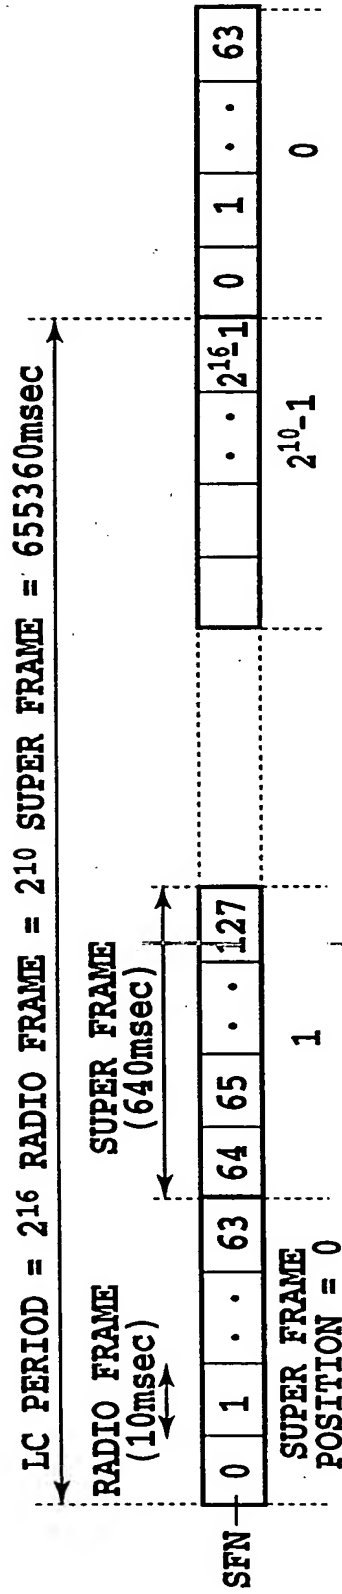


FIG.39


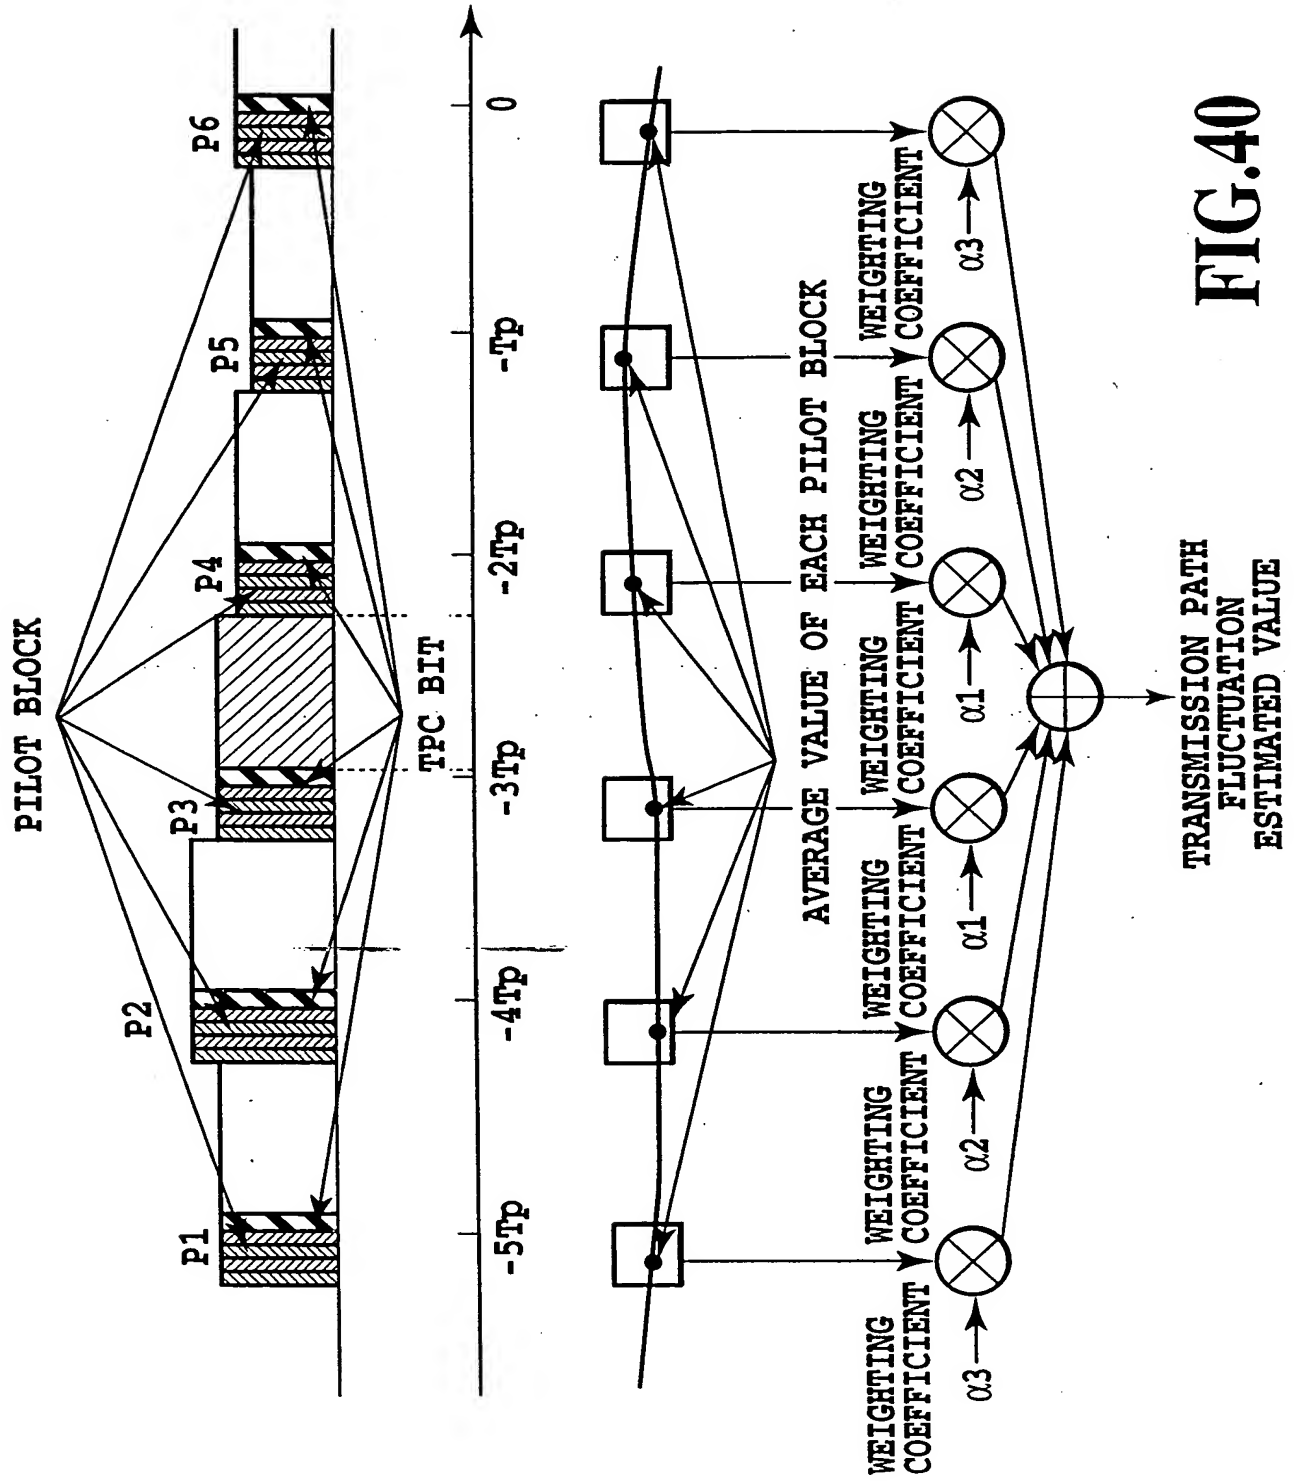


FIG.40

47/134

REVERSE CHANNEL

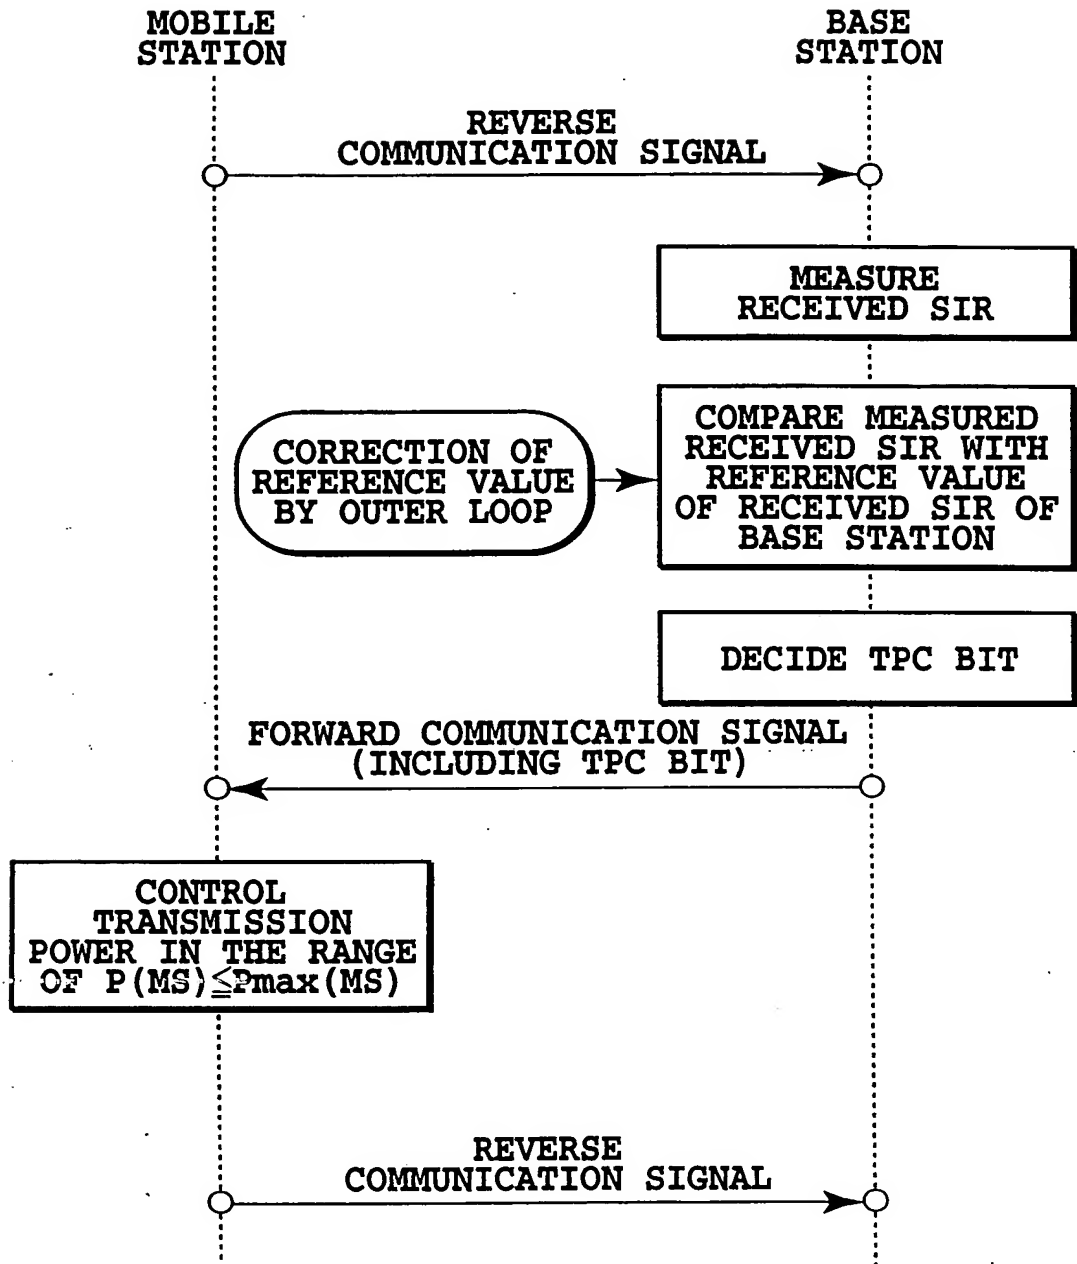

$P(MS)$. . . REVERSE TRANSMISSION POWER
 $P_{max}(MS)$. . . MAXIMUM REVERSE TRANSMISSION POWER
 $P(BS)$. . . FORWARD TRANSMISSION POWER
 $P_{max}(BS)$. . . MAXIMUM FORWARD TRANSMISSION POWER
 $P_{min}(BS)$. . . MINIMUM FORWARD TRANSMISSION POWER

FIG.41A

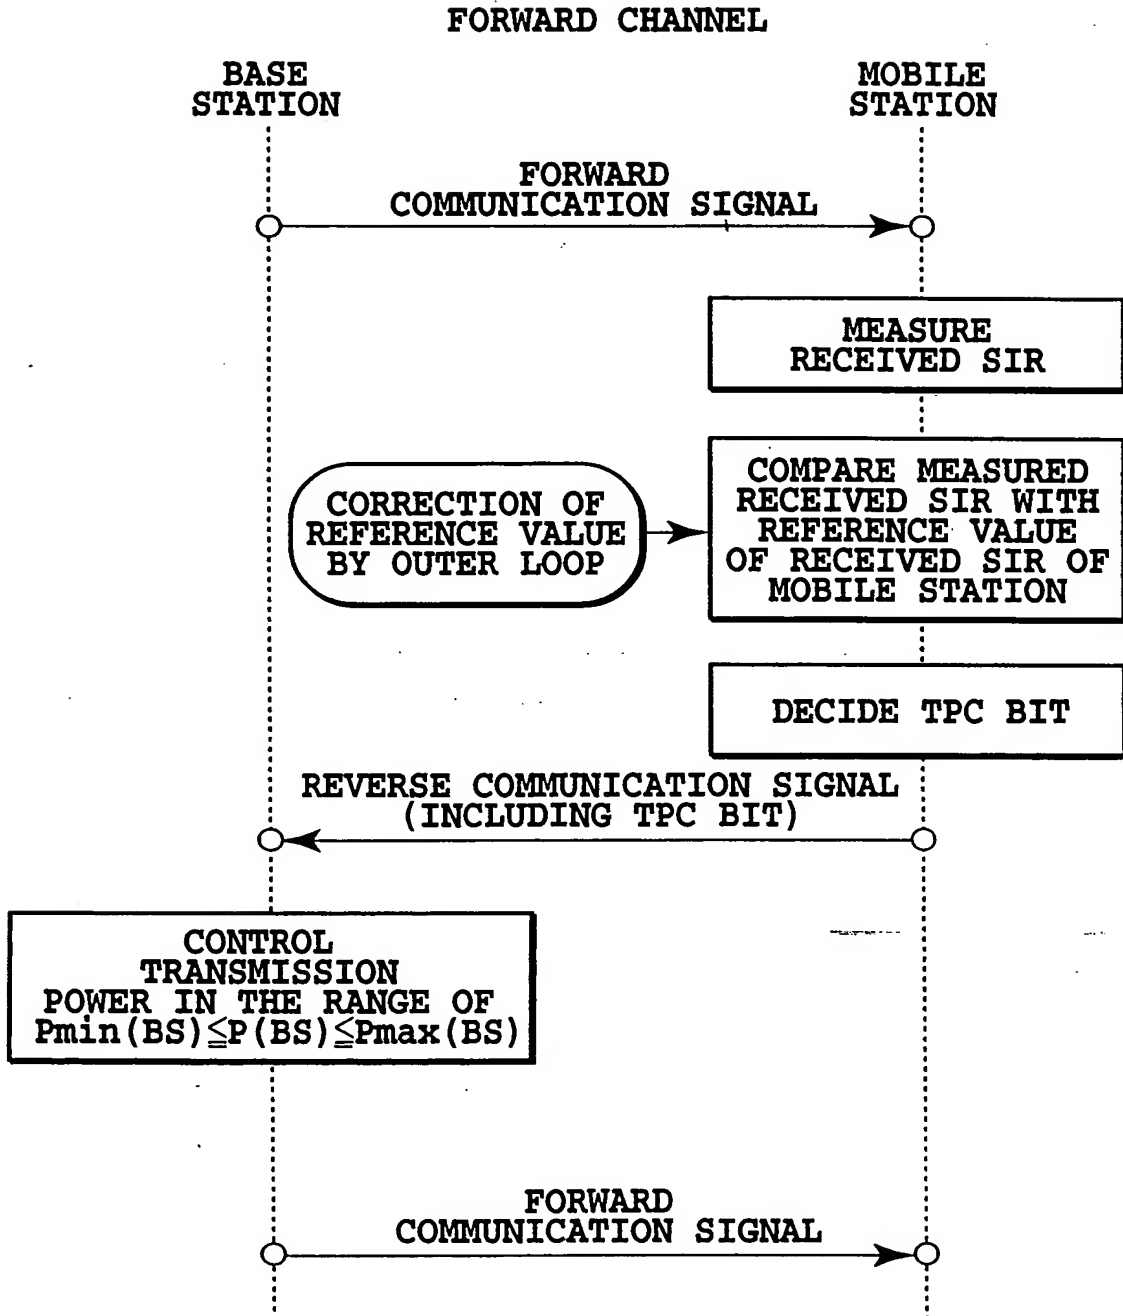


FIG.41B

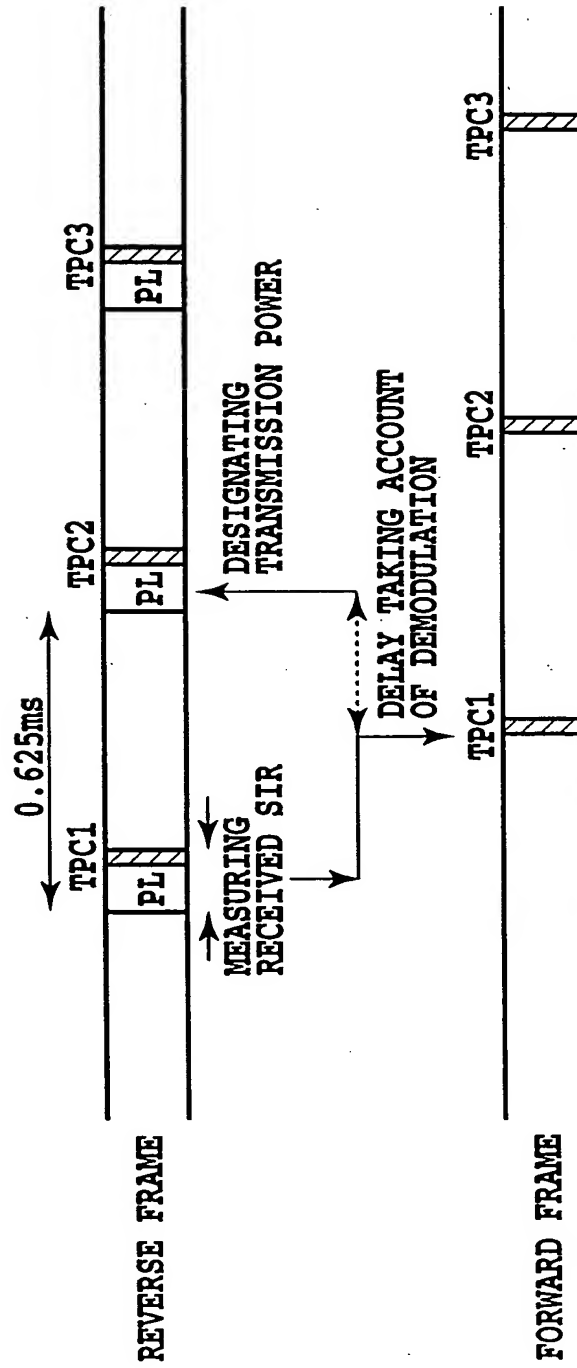


FIG.42

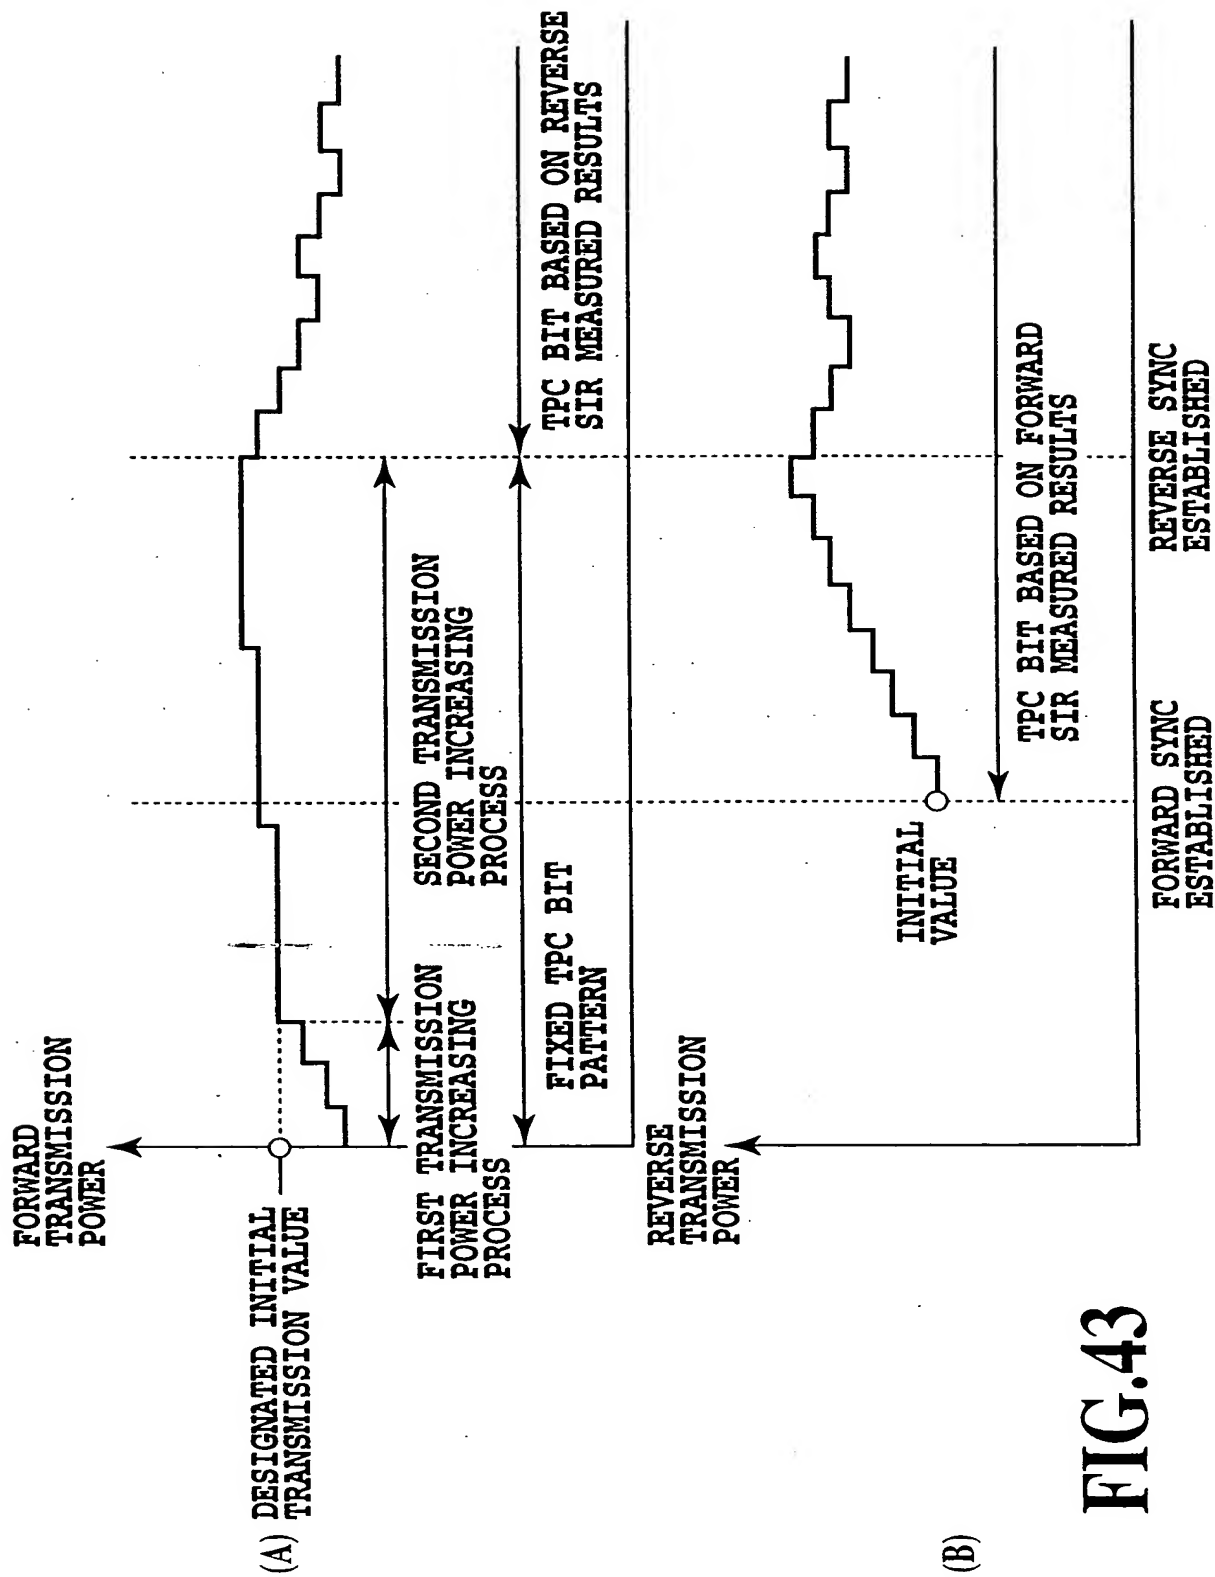


FIG.43

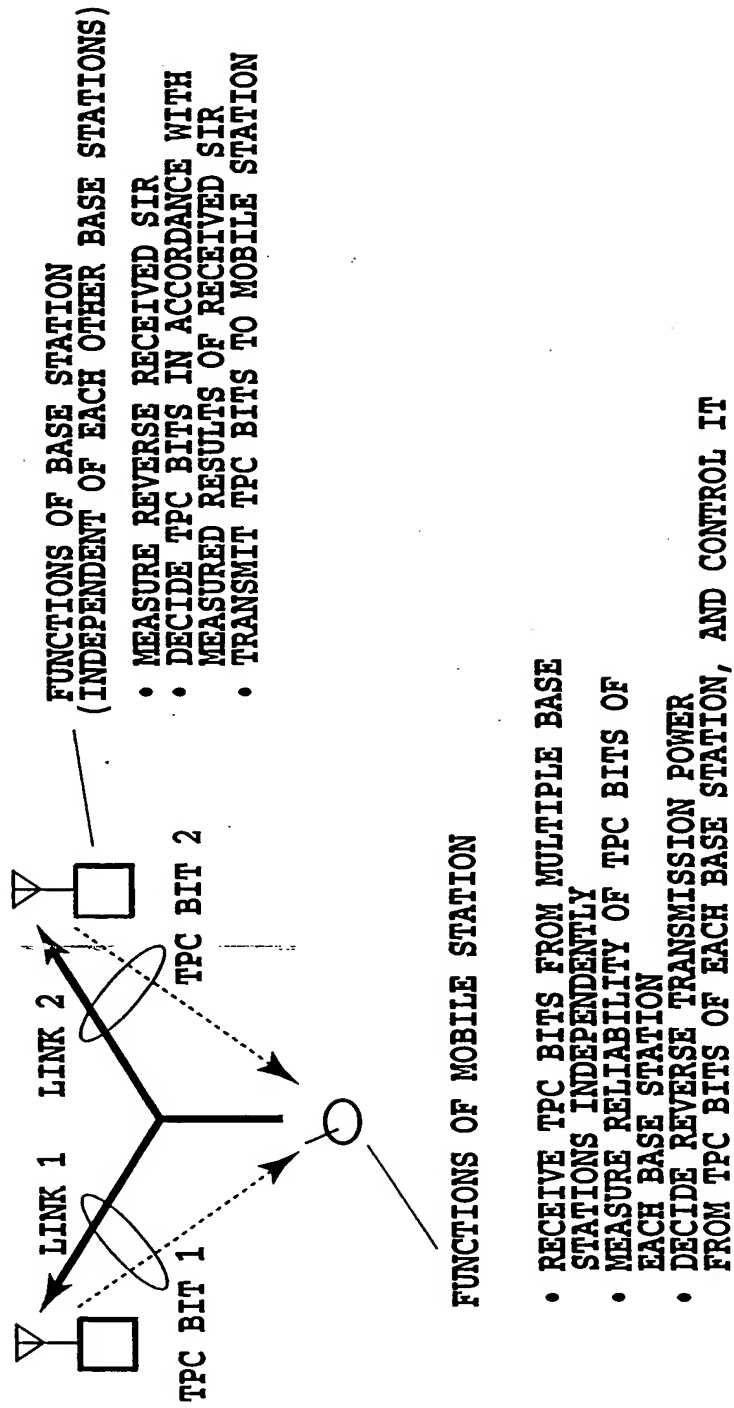


FIG.44

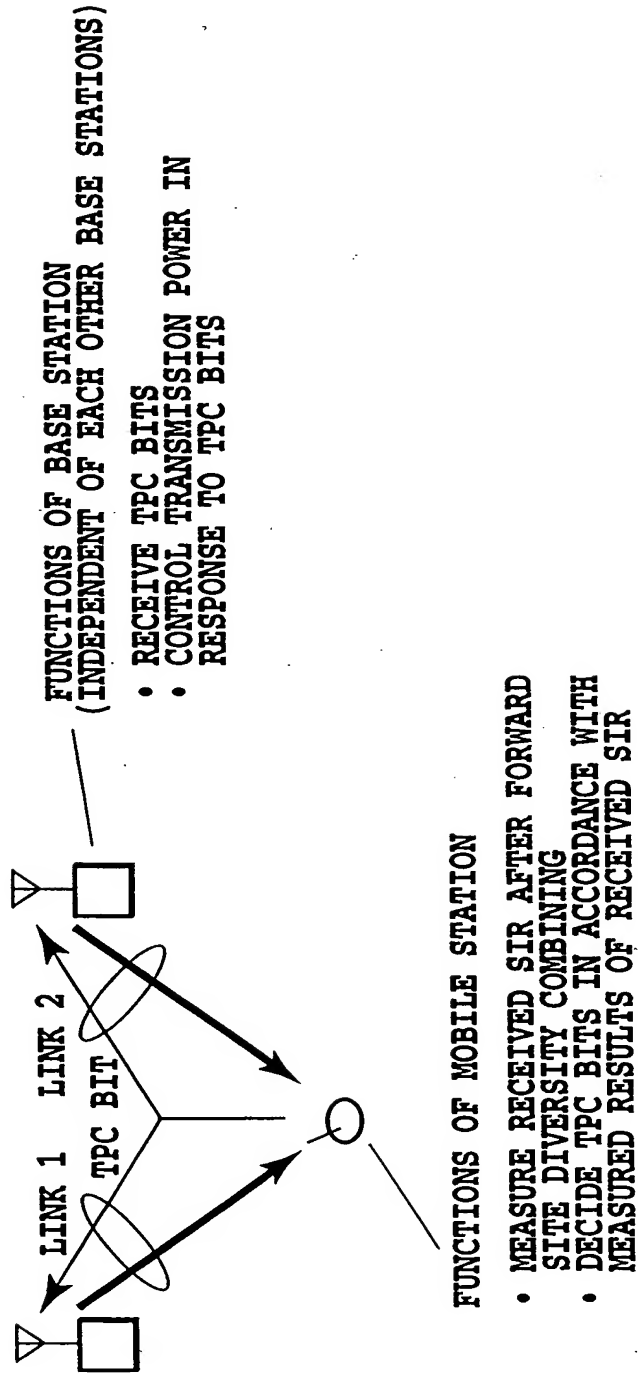


FIG.45

FIG.46

FIG.46A

FIG.46B

BASE STATION

START FORWARD DEDICATED CHANNEL TRANSMISSION

- INCREASE TRANSMISSION POWER GRADUALLY SO THAT OTHER USERS ARE UNAFFECTED (FIRST TRANSMISSION POWER INCREASING PROCESS)
- INFORMATION BITS CONSIST OF IDLE PATTERN (SEE, 4.1.10)
- TPC BITS ARE CONTROLLED IN ACCORDANCE WITH GRADUALLY INCREASING FIXED PATTERN

START REVERSE SYNC ESTABLISHMENT

CHIP SYNC ESTABLISHMENT

DECIDE FRAME ALIGNMENT
(WITH DETECTING SW)

REVERSE SYNC IS ESTABLISHED

DECIDE TPC BIT IN RESPONSE TO MEASURED RESULT OF REVERSE SIR

MOBILE STATION

START FORWARD SYNC ESTABLISHMENT

CHIP SYNC ESTABLISHMENT

DECIDE FRAME ALIGNMENT
(WITH DETECTING SW)

FORWARD SYNC IS ESTABLISHED

START REVERSE DEDICATED CHANNEL TRANSMISSION

- INFORMATION BITS CONSIST OF IDLE PATTERN (SEE, 4.1.10)
- TRANSMISSION POWER IS DECIDED ACCORDING TO TPC BITS TRANSMITTED FROM BASE STATION
- TPC BITS ARE DECIDED IN ACCORDANCE WITH MEASURED RESULTS OF FORWARD SIR

FIG.46A

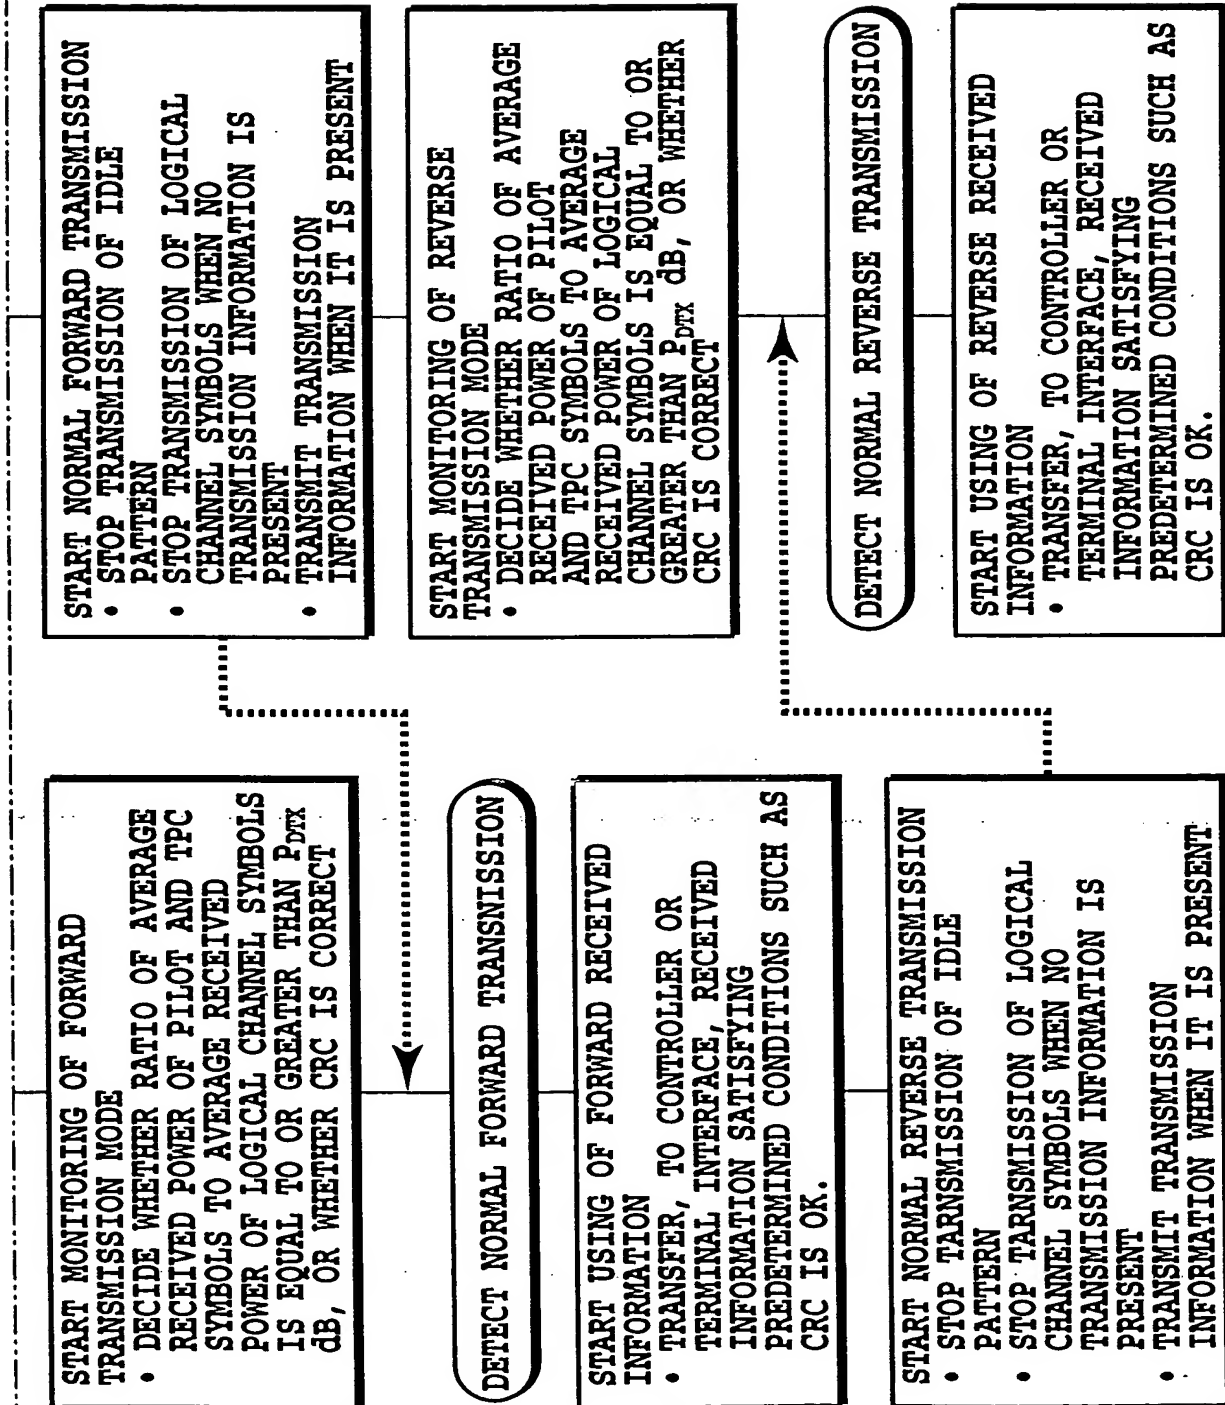


FIG. 46B

55/134



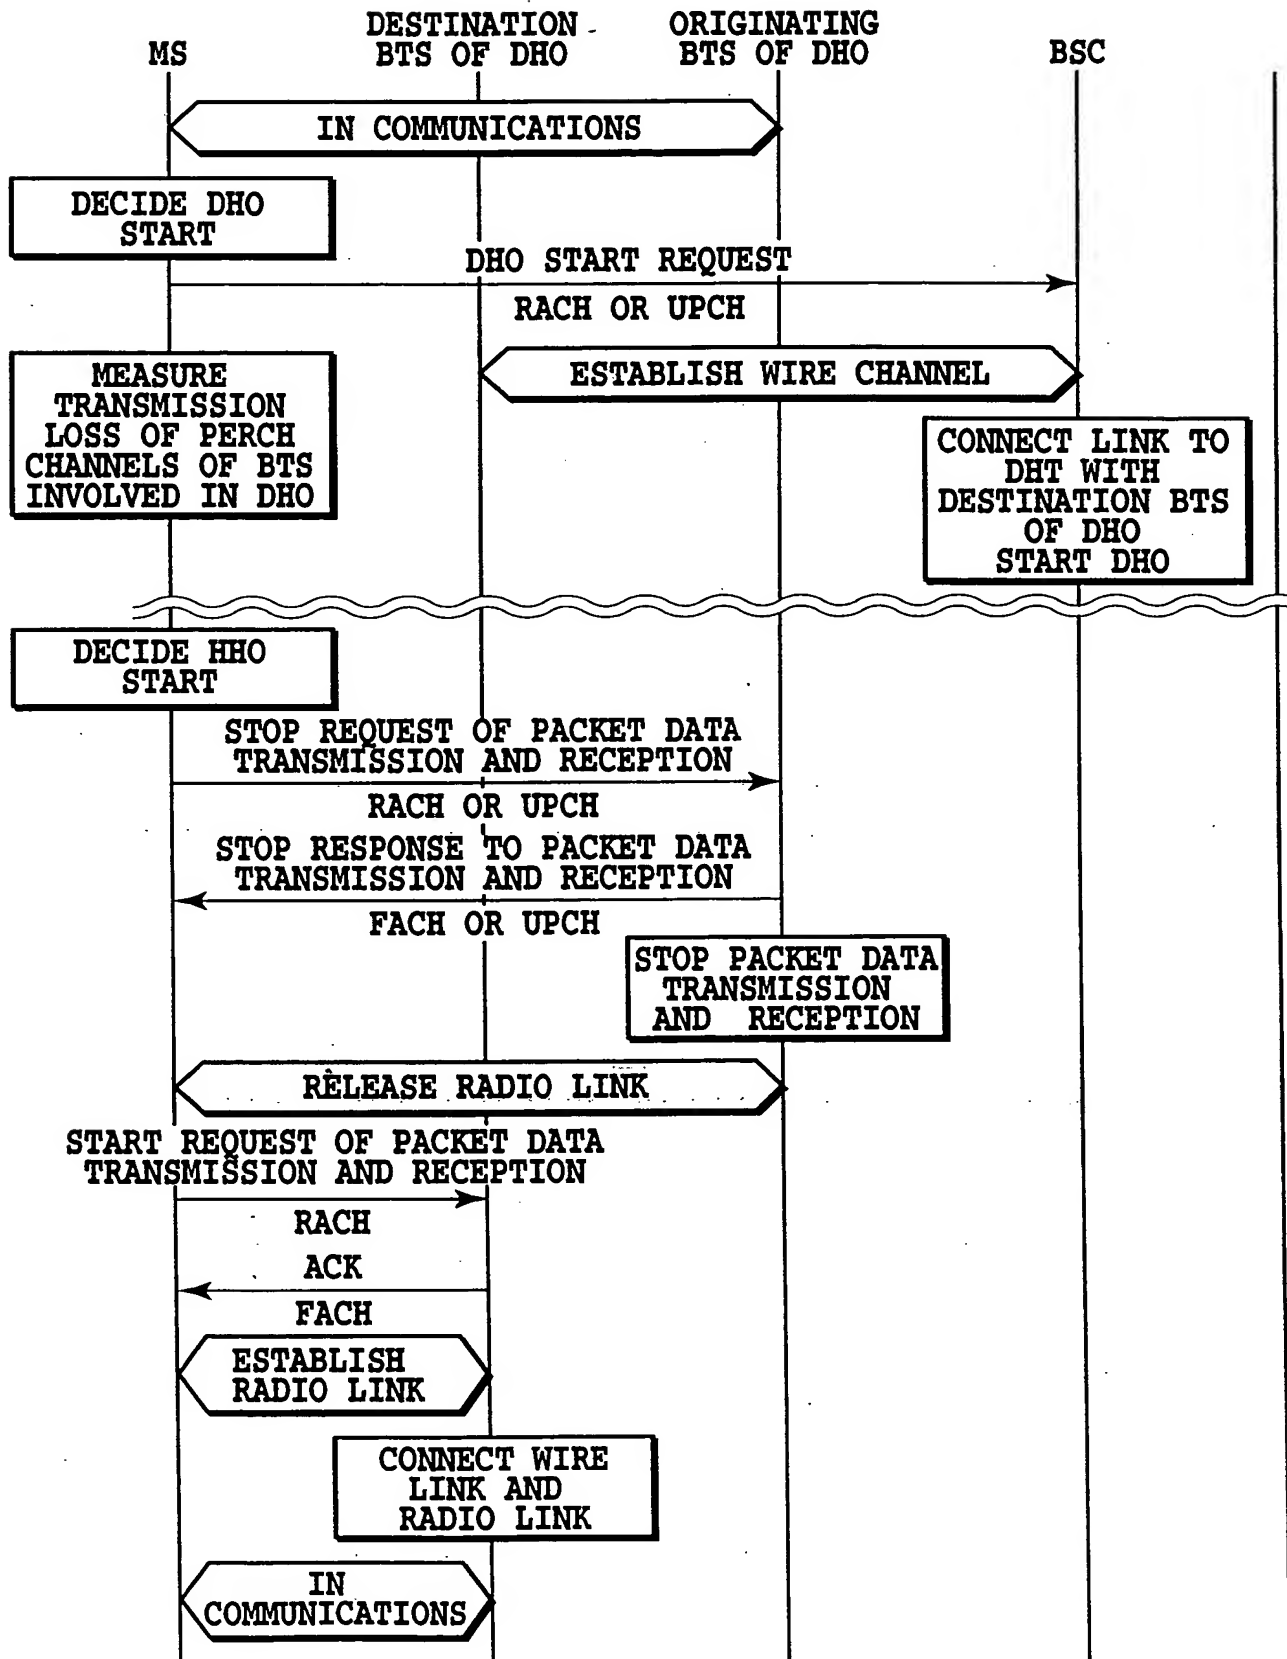


FIG.47

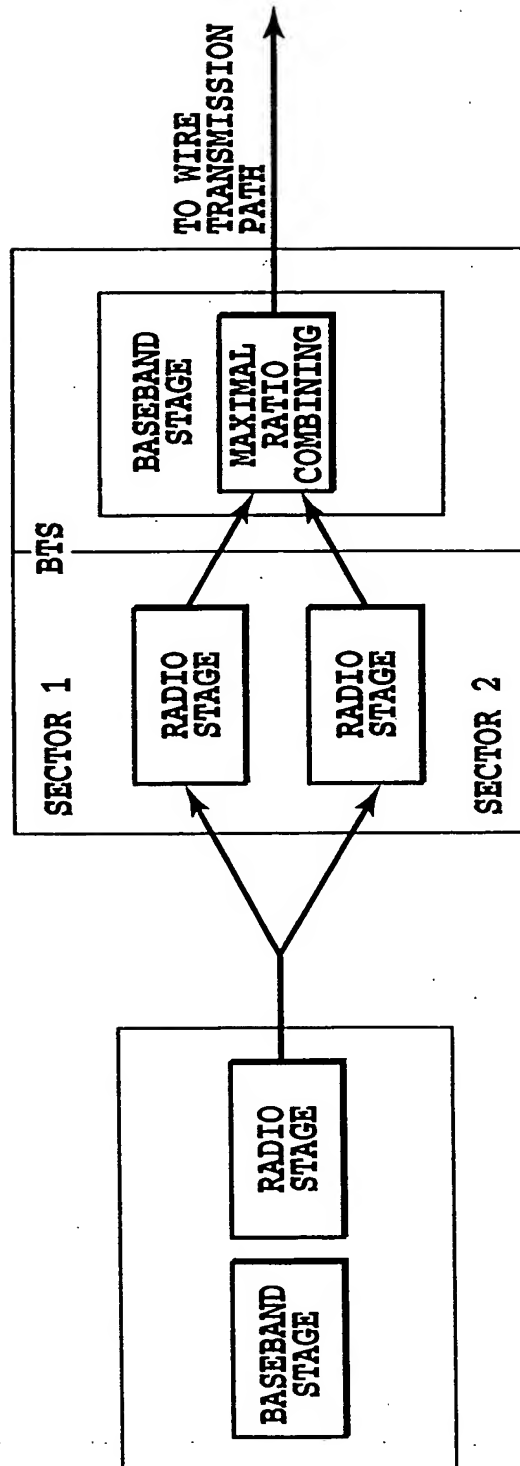

REVERSE DEDICATED PHYSICAL CHANNEL (UPCH)

FIG.48

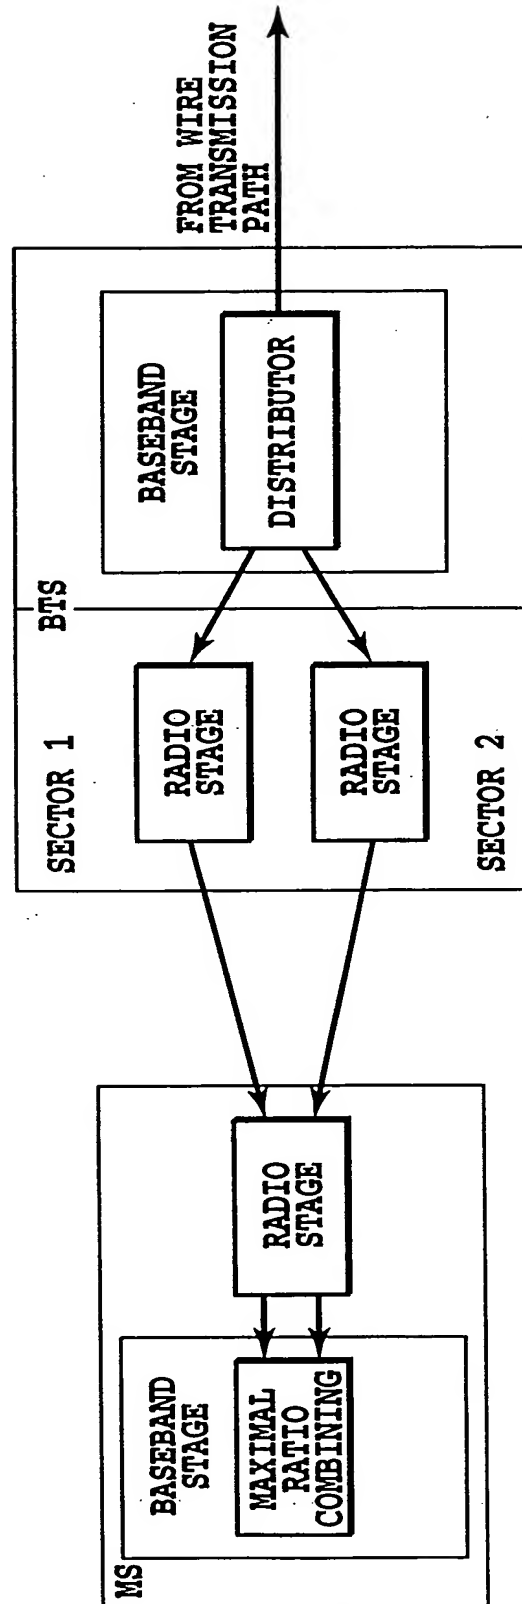

FORWARD DEDICATED PHYSICAL CHANNEL (UPCH)

FIG.49

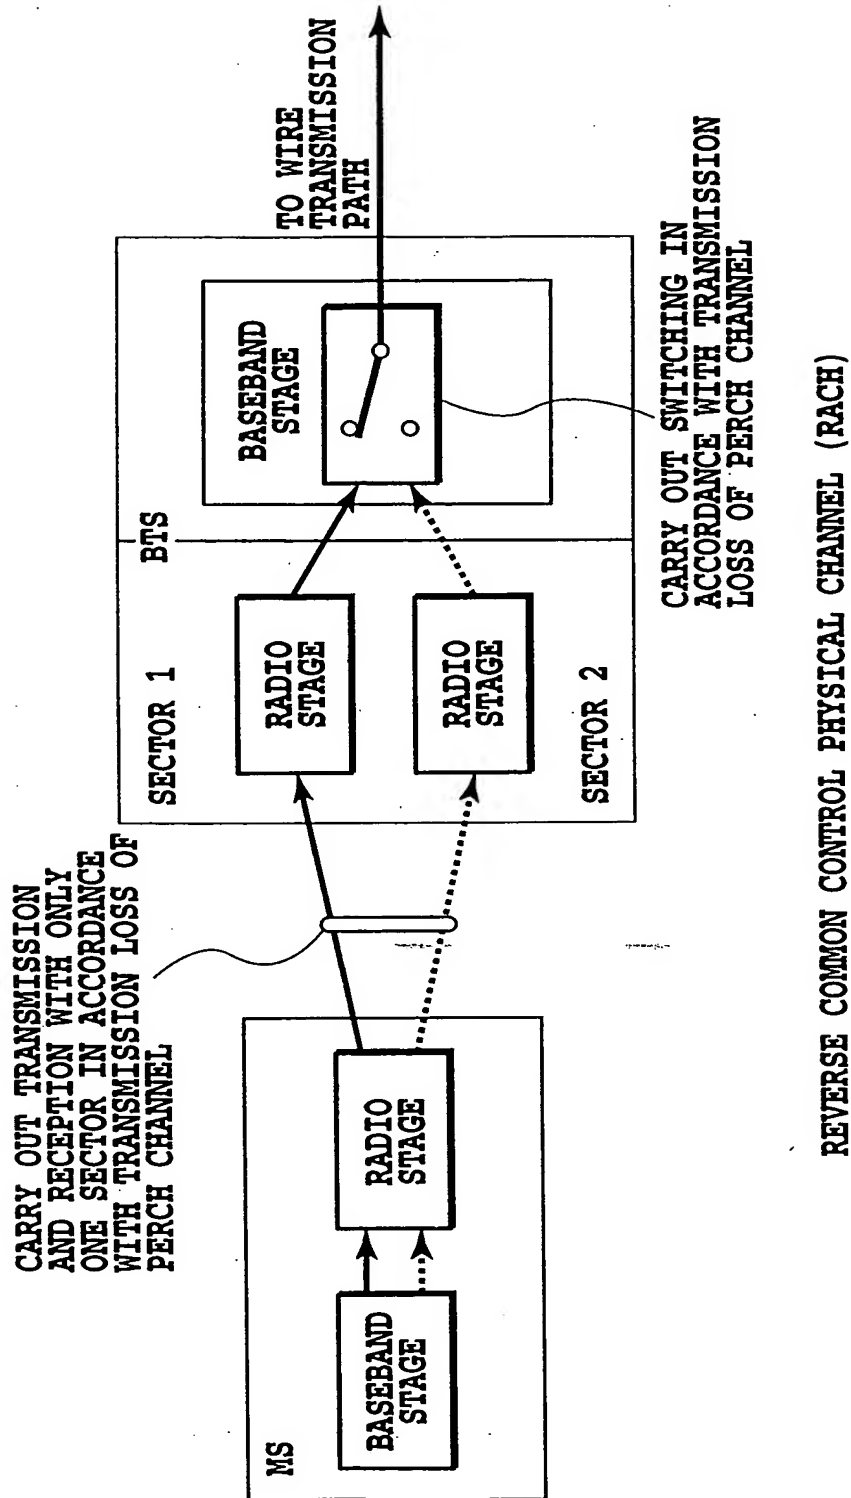


FIG.50

REVERSE COMMON CONTROL PHYSICAL CHANNEL (RACH)



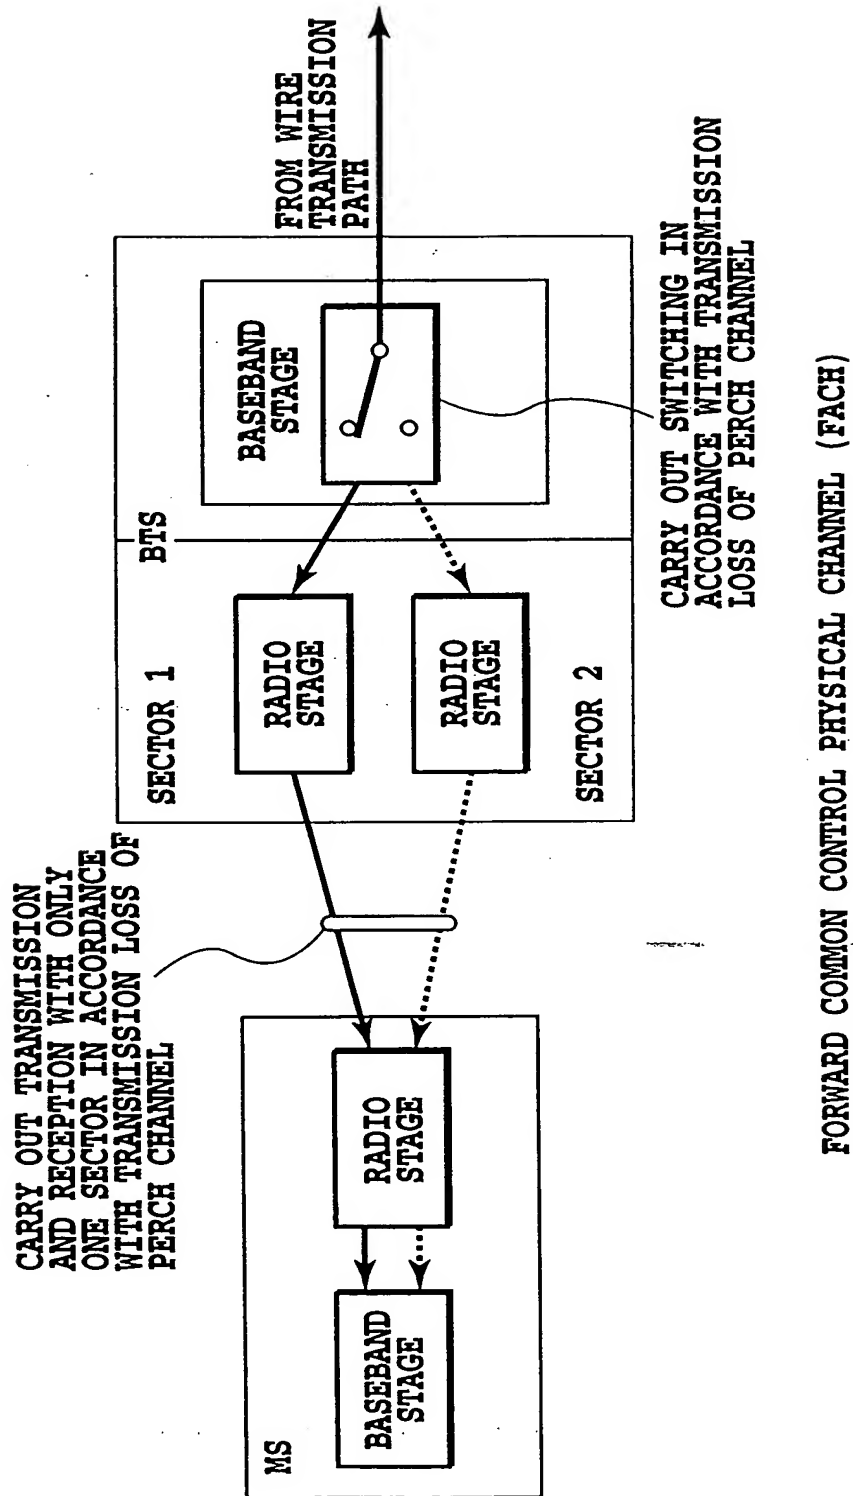


FIG.51

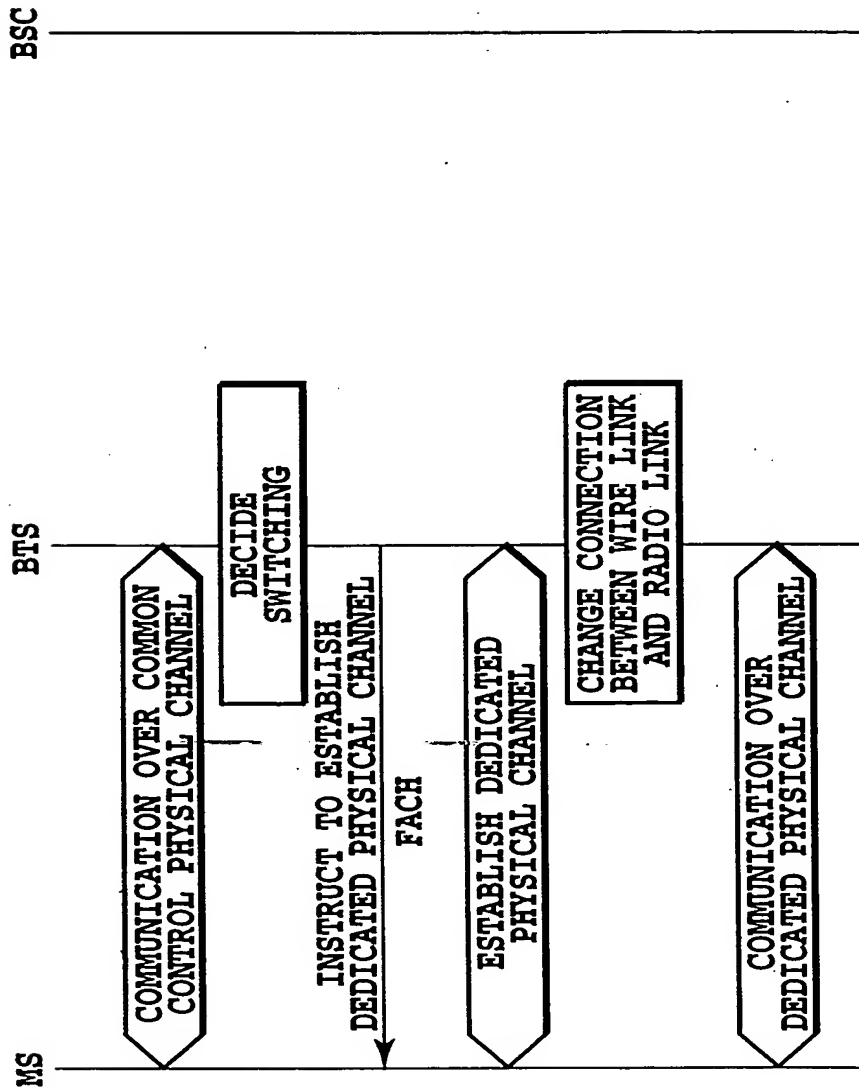

FROM COMMON CONTROL PHYSICAL CHANNEL
TO DEDICATED PHYSICAL CHANNEL

FIG.52

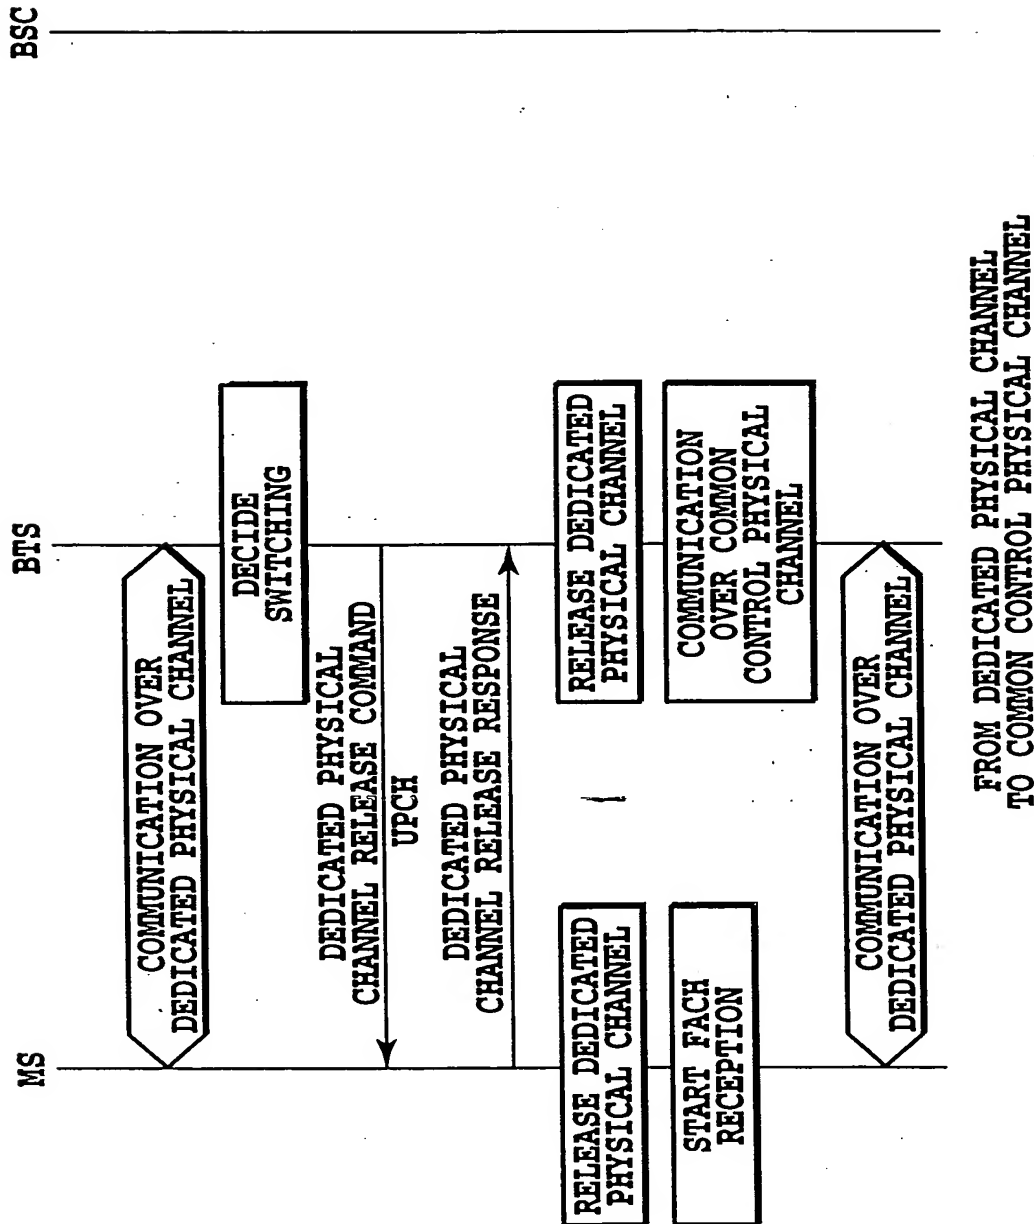

FROM DEDICATED PHYSICAL CHANNEL
TO COMMON CONTROL PHYSICAL CHANNEL

FIG.53

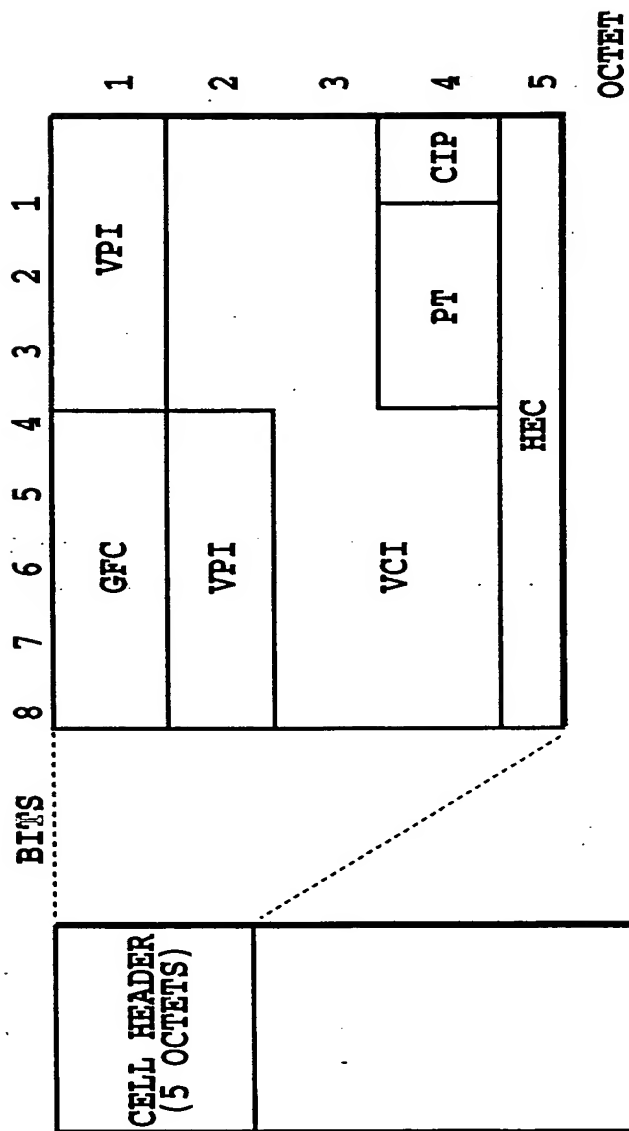


FIG.54

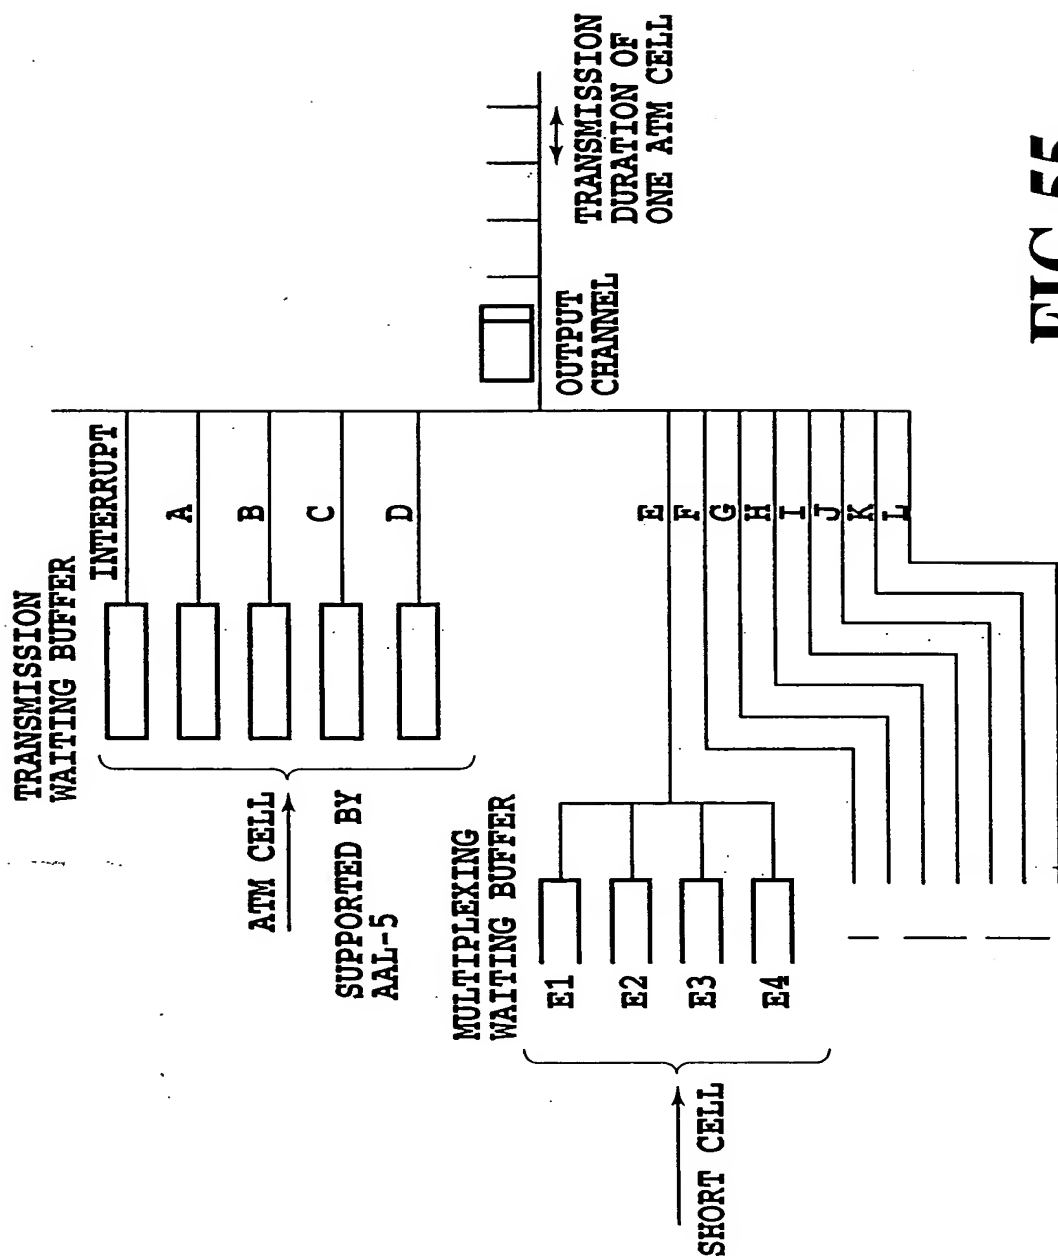


FIG.55

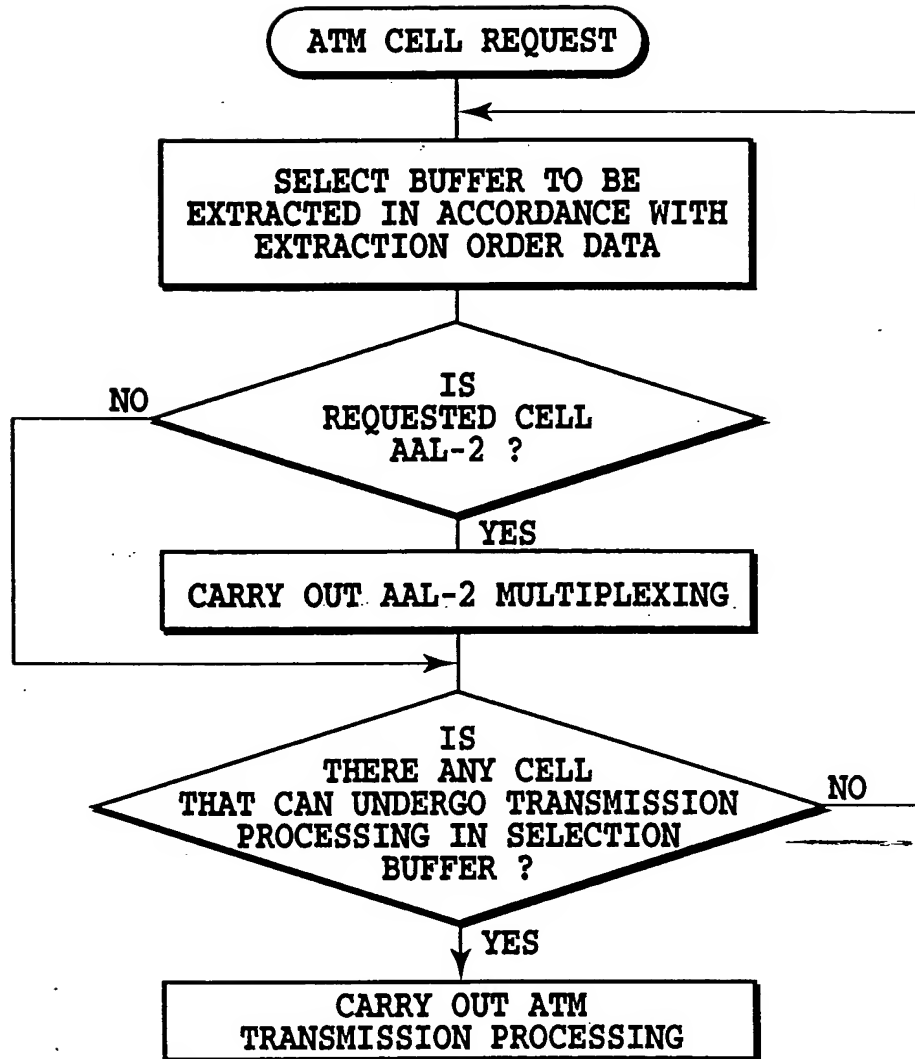


FIG.56

65/134

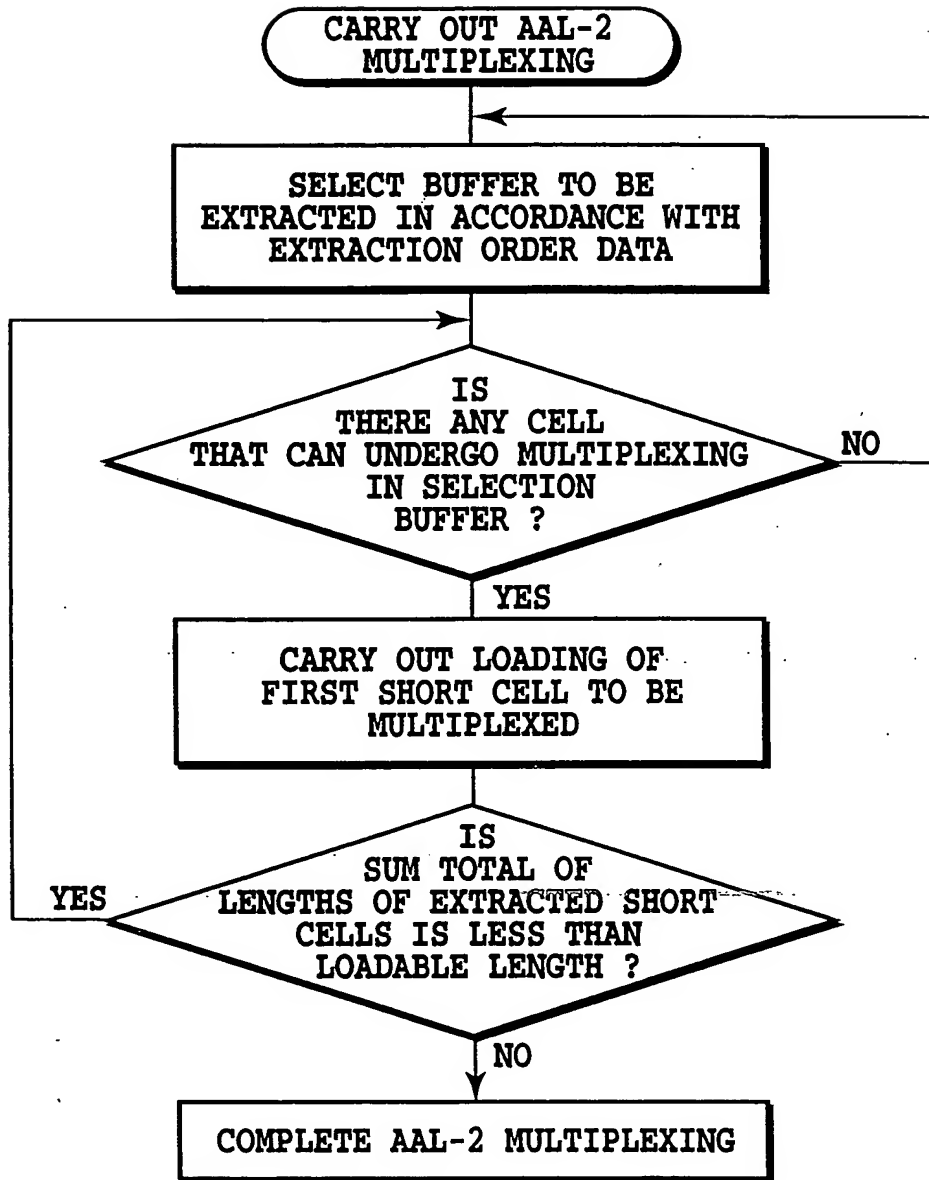


FIG.57

ATM CELL TRANSMISSION SEQUENCE TABLE

TRANSMISSION ORDER (ABOUT 256 AT MAXIMUM) →

PRIORITY ↓

E	F	A	E	F	B	E	F	C	E	. . .
F	A	B	F	A	C	F	A	D	F	. . .
A	B	C	A	B	D	A	B	E	A	. . .
B	C	D	B	C	E	B	C	F	B	. . .
C	D	E	C	D	F	C	D	A	C	. . .
D	E	F	D	E	A	D	E	B	D	. . .

FIG.58A

SHORT CELL TRANSMISSION SEQUENCE TABLE
(QUALITY CLASS (6))

TRANSMISSION ORDER (ABOUT 128 AT MAXIMUM) →

PRIORITY ↓

E1	E1	E1	E2	E1	E1	E1	E3	. . .
E2	E2	E2	E3	E2	E2	E2	E4	. . .
E3	E3	E3	E4	E3	E3	E3	E1	. . .
E4	E4	E4	E1	E4	E4	E4	E2	. . .

FIG.58B

SHORT CELL TRANSMISSION SEQUENCE TABLE
(QUALITY CLASS (7))


TRANSMISSION ORDER (ABOUT 128 AT MAXIMUM) →

PRIORITY ↓

F1	F1	F2	F1	F1	F3	F1	F1	. . .
F2	F2	F3	F2	F2	F4	F2	F2	. . .
F3	F3	F4	F3	F3	F1	F3	F3	. . .
F4	F4	F1	F4	F4	F2	F4	F4	. . .

FIG.58C

- CARRY OUT CELL EXTRACTION PROCESSING IN ACCORDANCE WITH TRANSMISSION SEQUENCE DETERMINED FOR EACH OUTPUT TIMING.
- IF NO CELL IS PRESENT IN HIGHER PRIORITY QUALITY CLASS, A CELL IN THE NEXT PRIORITY IS EXTRACTED.

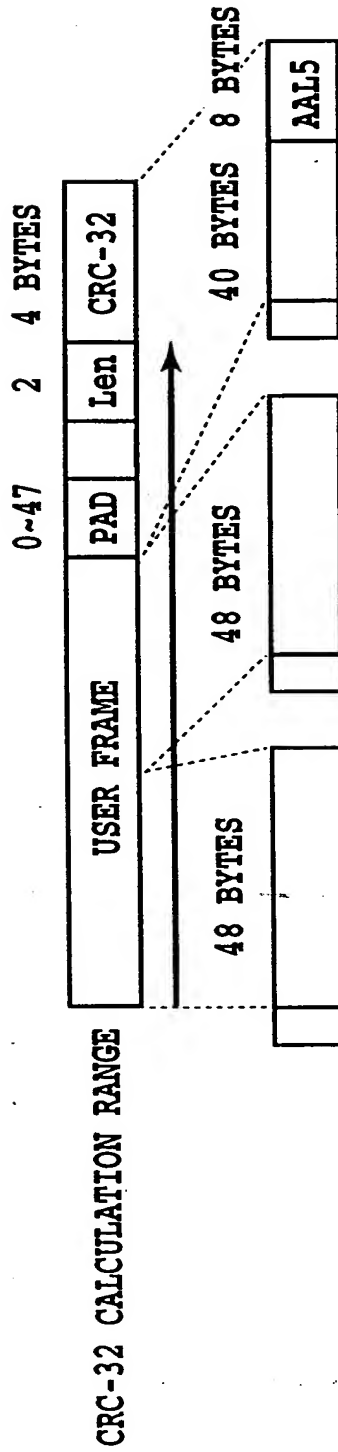

PAD : PADDING BITS (ALL "0s")

Len : NUMBER OF BYTES OF EFFECTIVE DATA LENGTH OF USER FRAME

CRC-32 : CRC CHECKING BITS OVER 32 BITS

CRC-32 : GENERATOR POLYNOMIAL

$$G(X) = X^{32} + X^{26} + X^{23} + X^{16} + X^{12} + X^{11} + X^{10} + X^8 + X^7 + X^5 + X^4 + X^2 + X^1 + 1$$

CHECK BITS ARE OBTAINED BY INVERTING BITS OF REMAINDER GENERATED BY THE GENERATOR POLYNOMIAL.

FIG.59

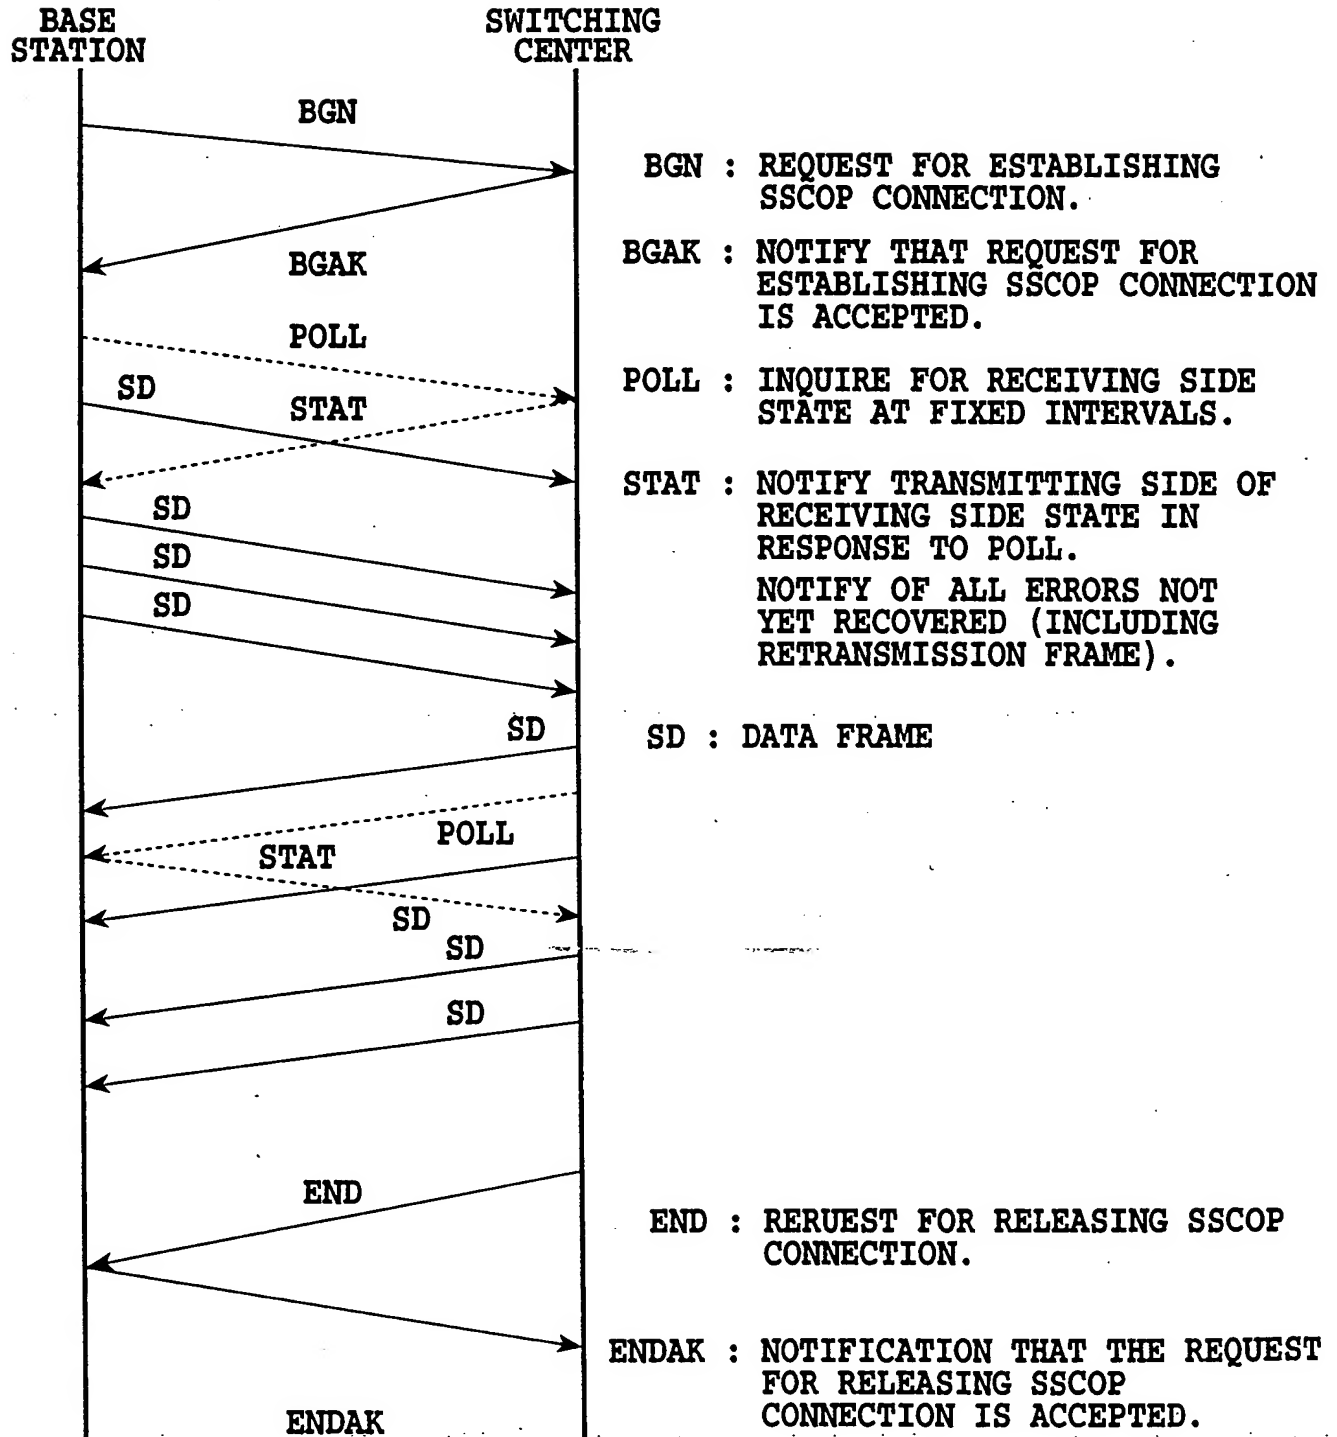


FIG.60


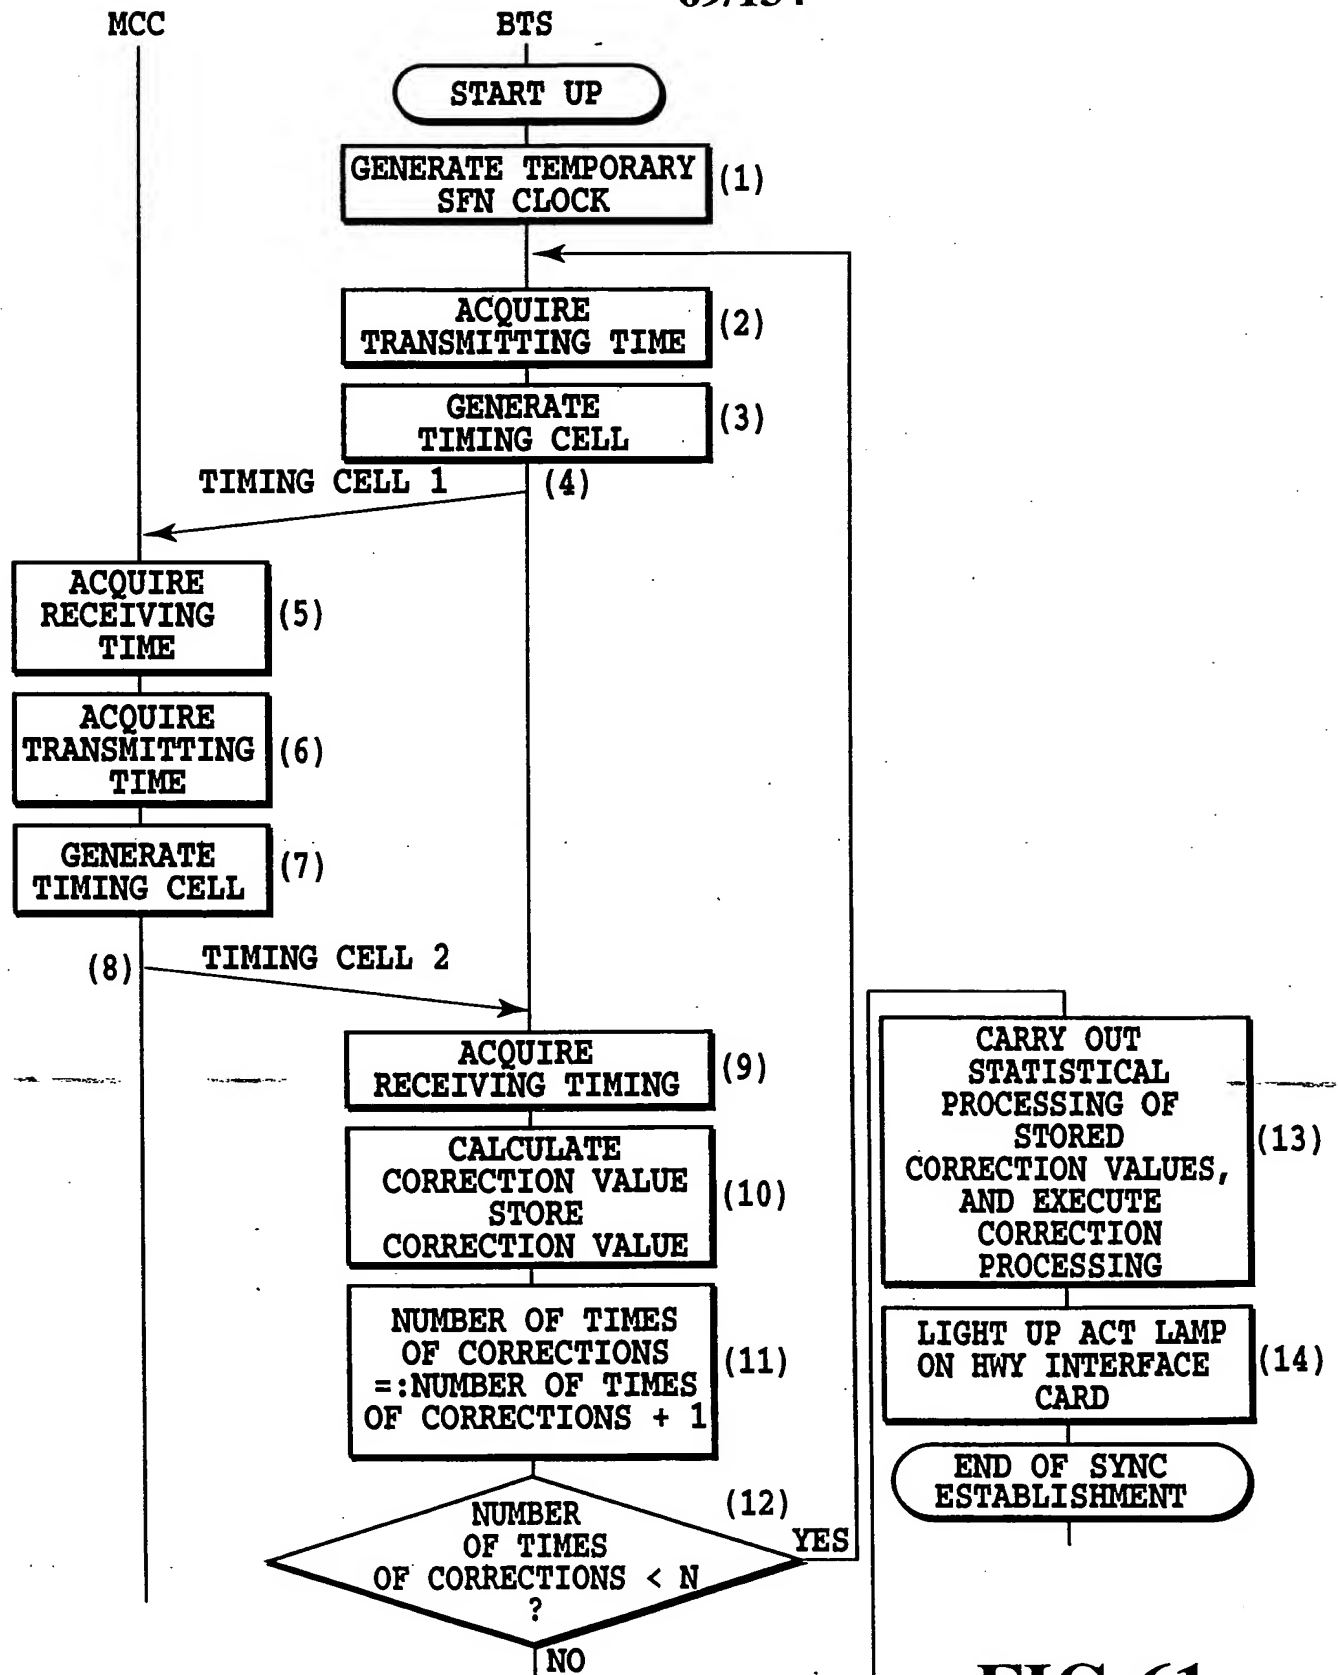


FIG.61

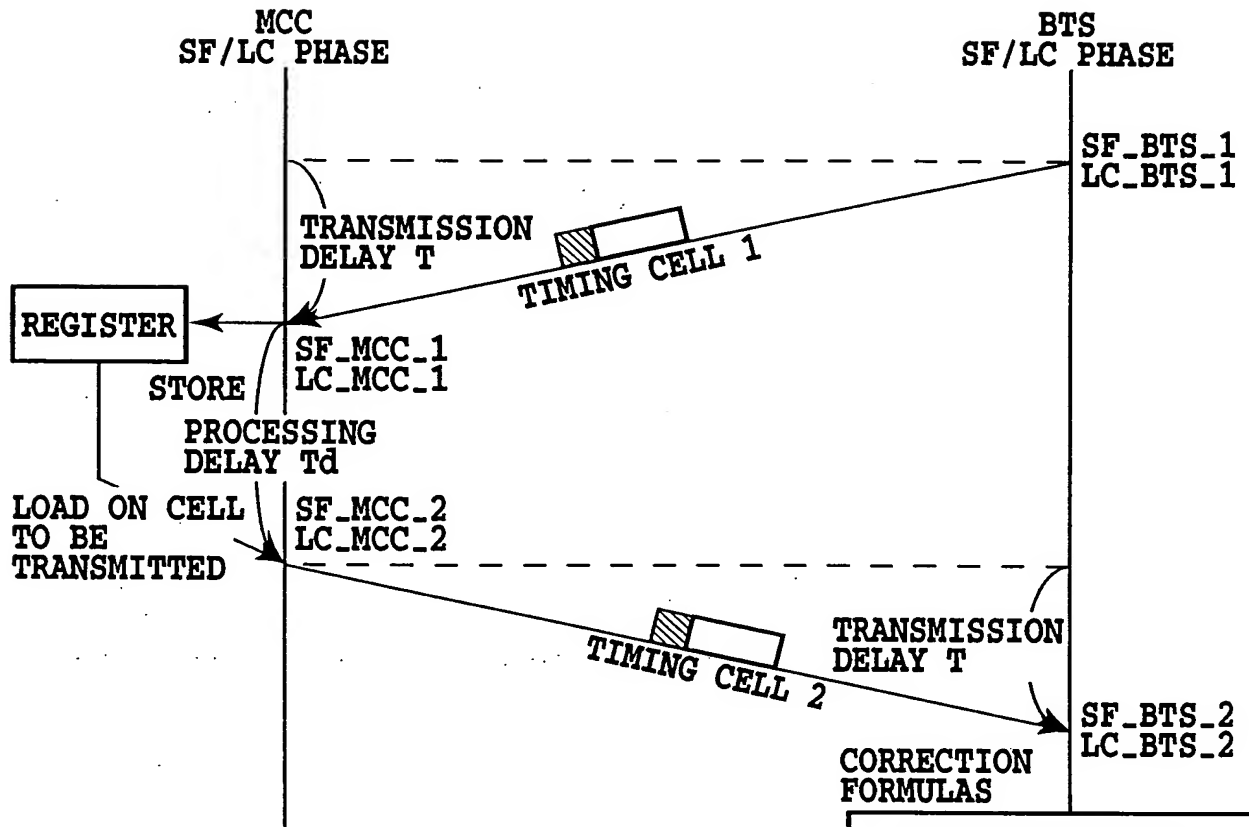

• PHASE CORRECTION
VALUE (X)

$$X = MCC_1 - (BTS_1 + T)$$

• TRANSMISSION DELAY (T)

$$T = (BTS_2 - BTS_1 - T_d) / 2$$

• PROCESSING DELAY (T_d)

$$T_d = MCC_2 - MCC_1$$

WHERE

$$MCC_1 = LC_MCC_1 \times 640(ms) + SF_MCC_1$$

$$MCC_2 = LC_MCC_2 \times 640(ms) + SF_MCC_2$$

$$BTS_1 = LC_BTS_1 \times 640(ms) + SF_BTS_1$$

$$BTS_2 = LC_BTS_2 \times 640(ms) + SF_BTS_2$$

FIG.62

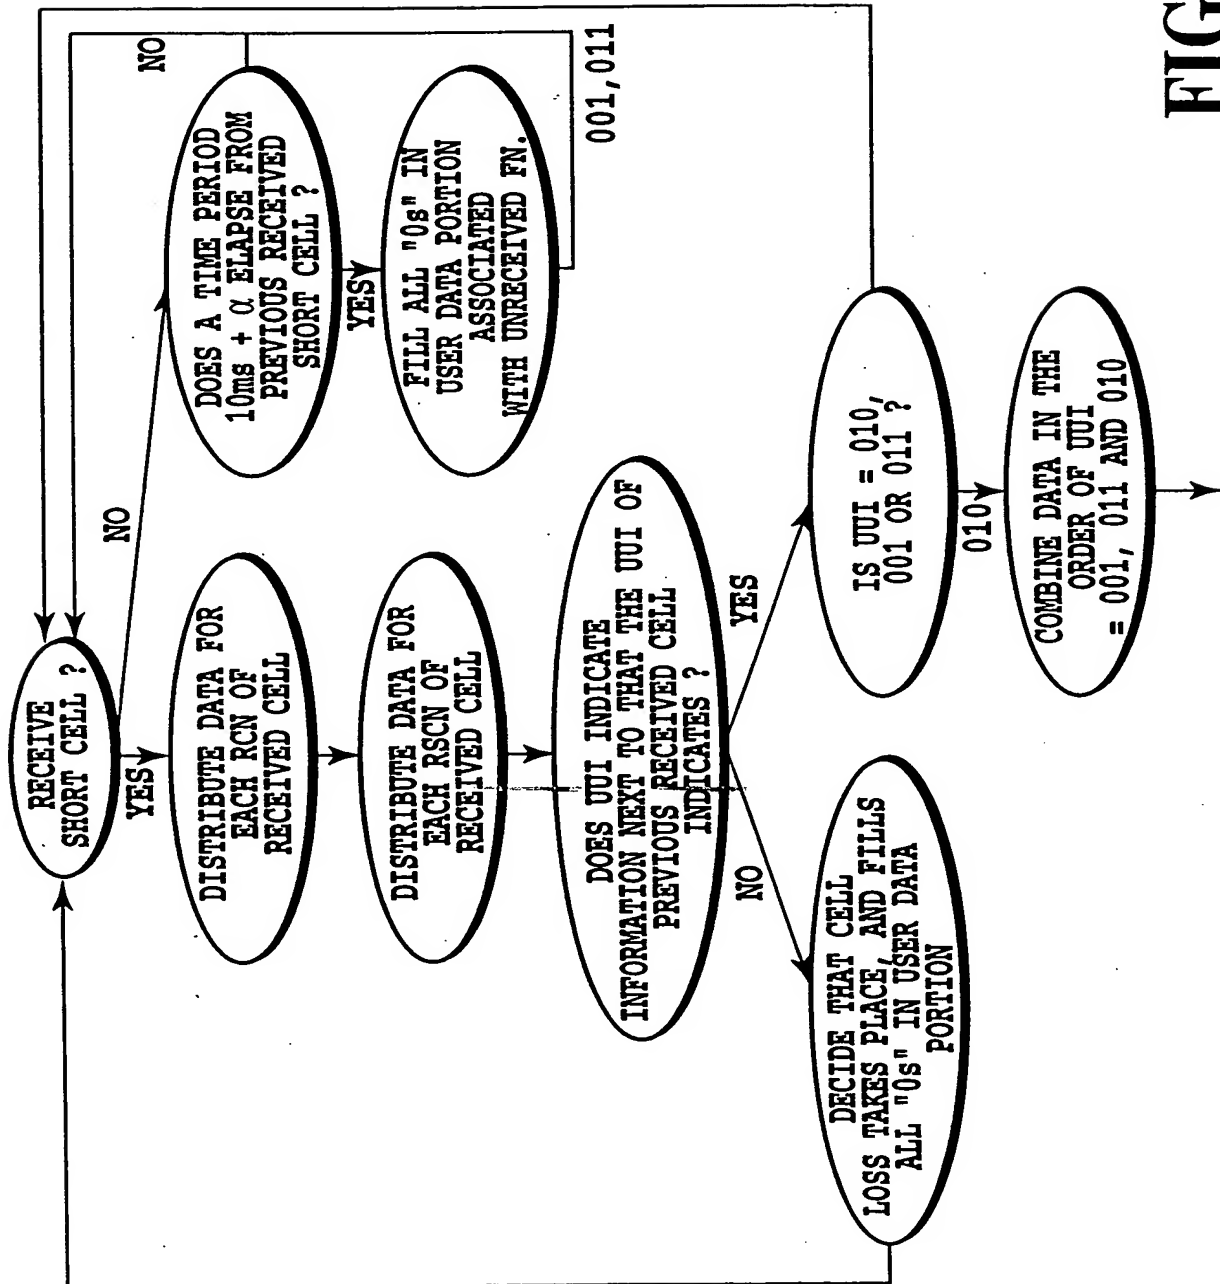



FIG.63

FIG.64

FIG.64A

FIG.64B

FIG.64A

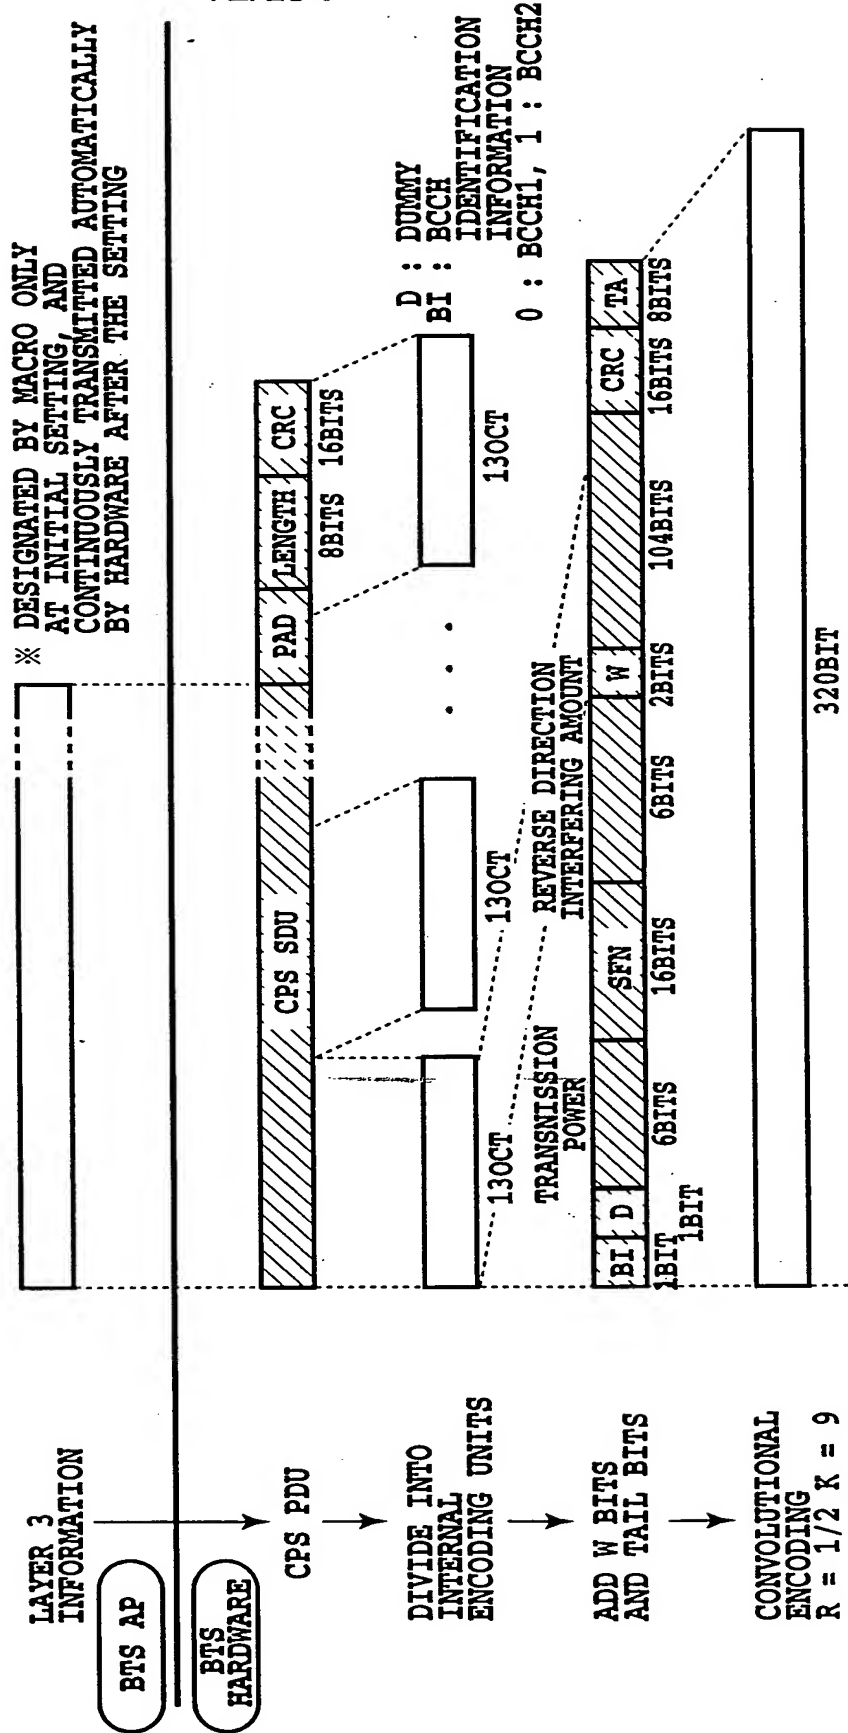

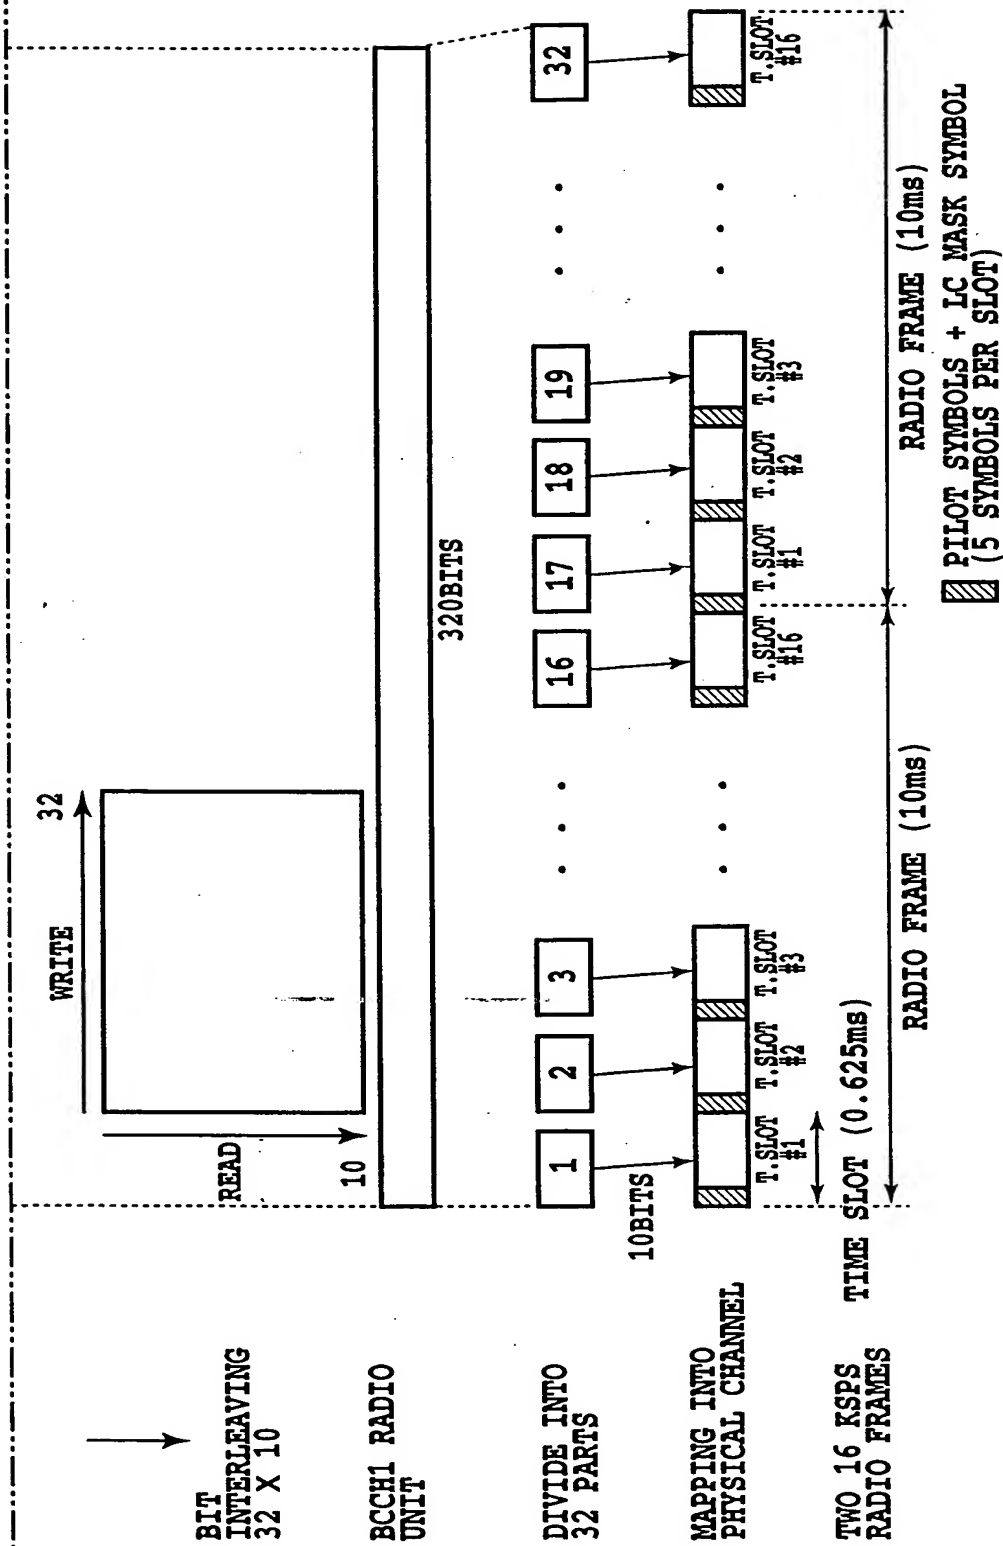


FIG.64B

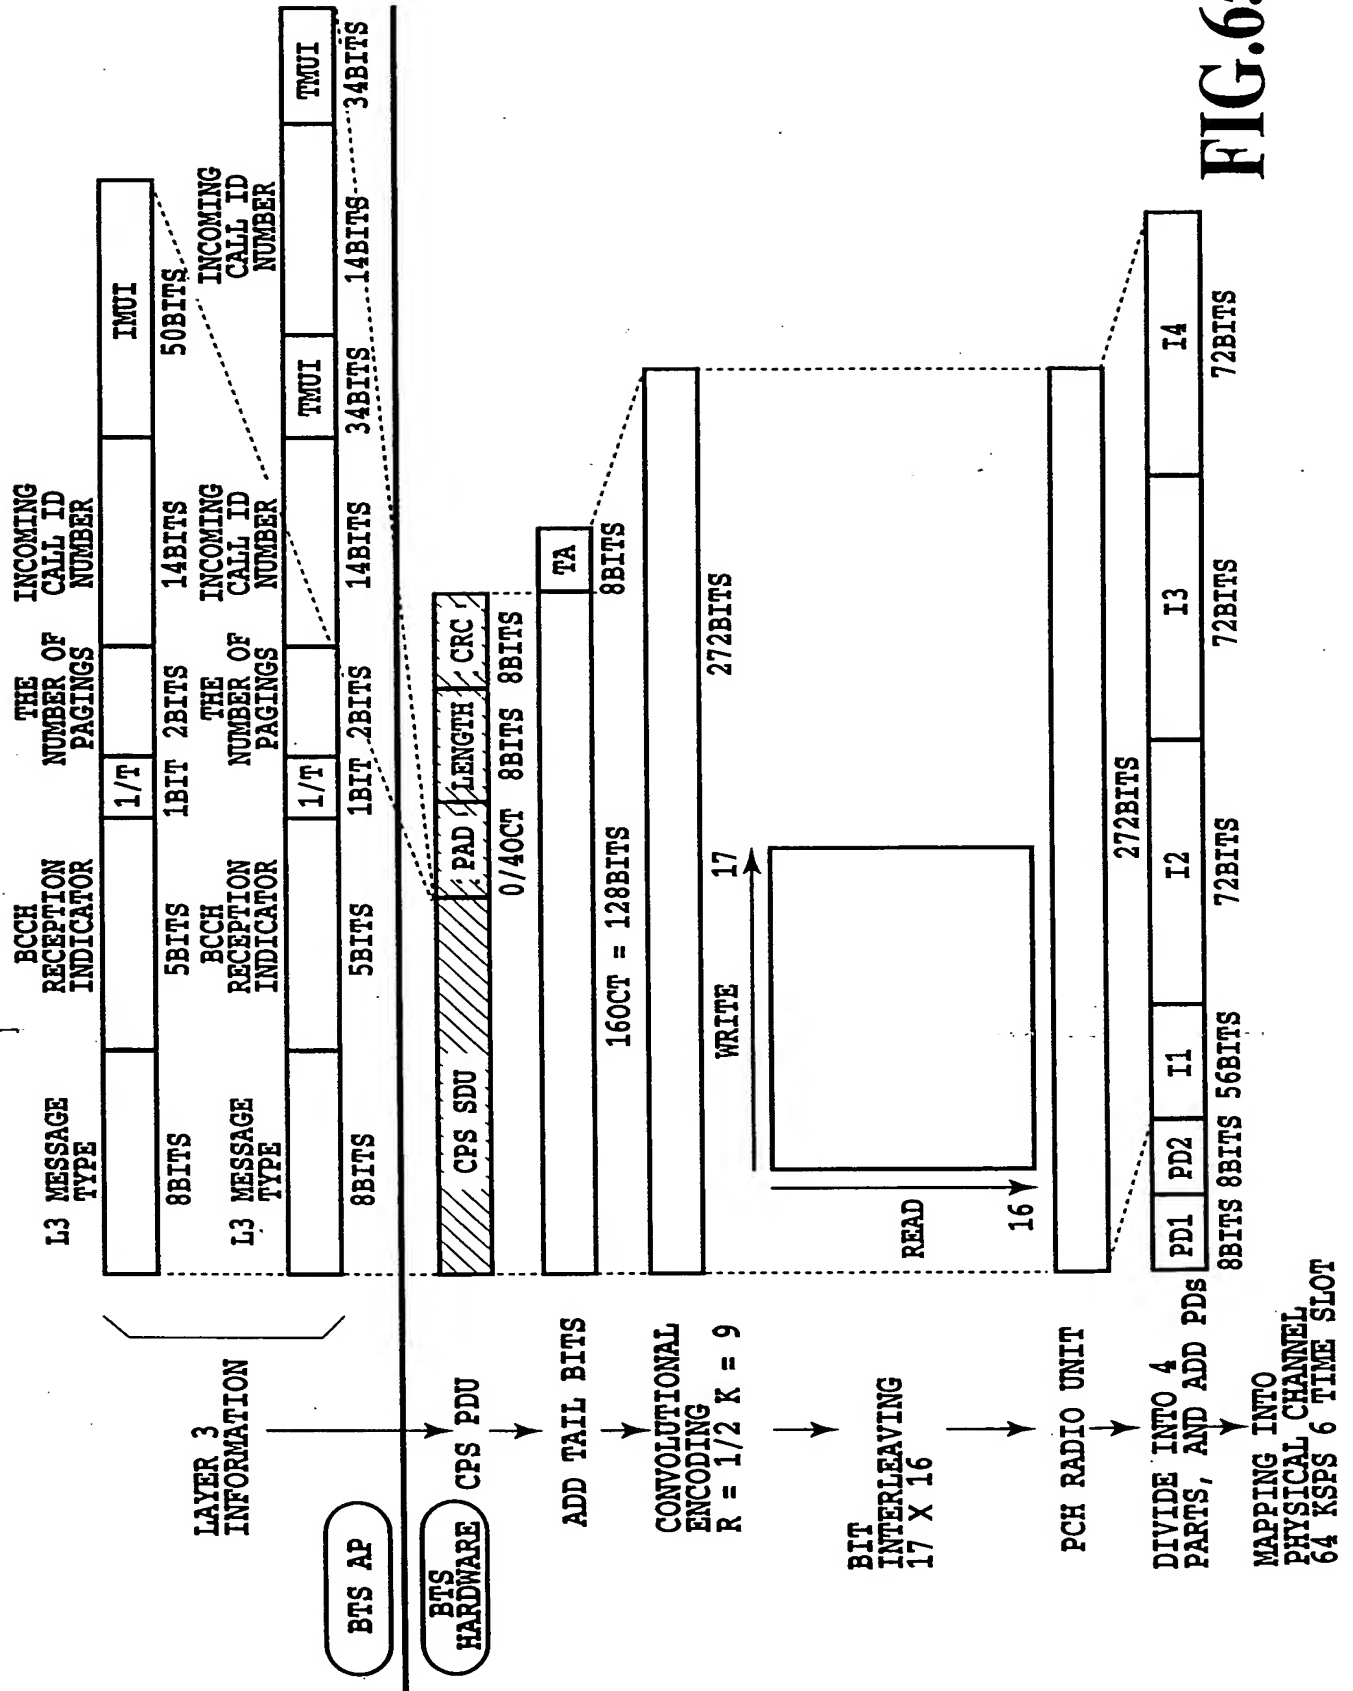


FIG. 65A

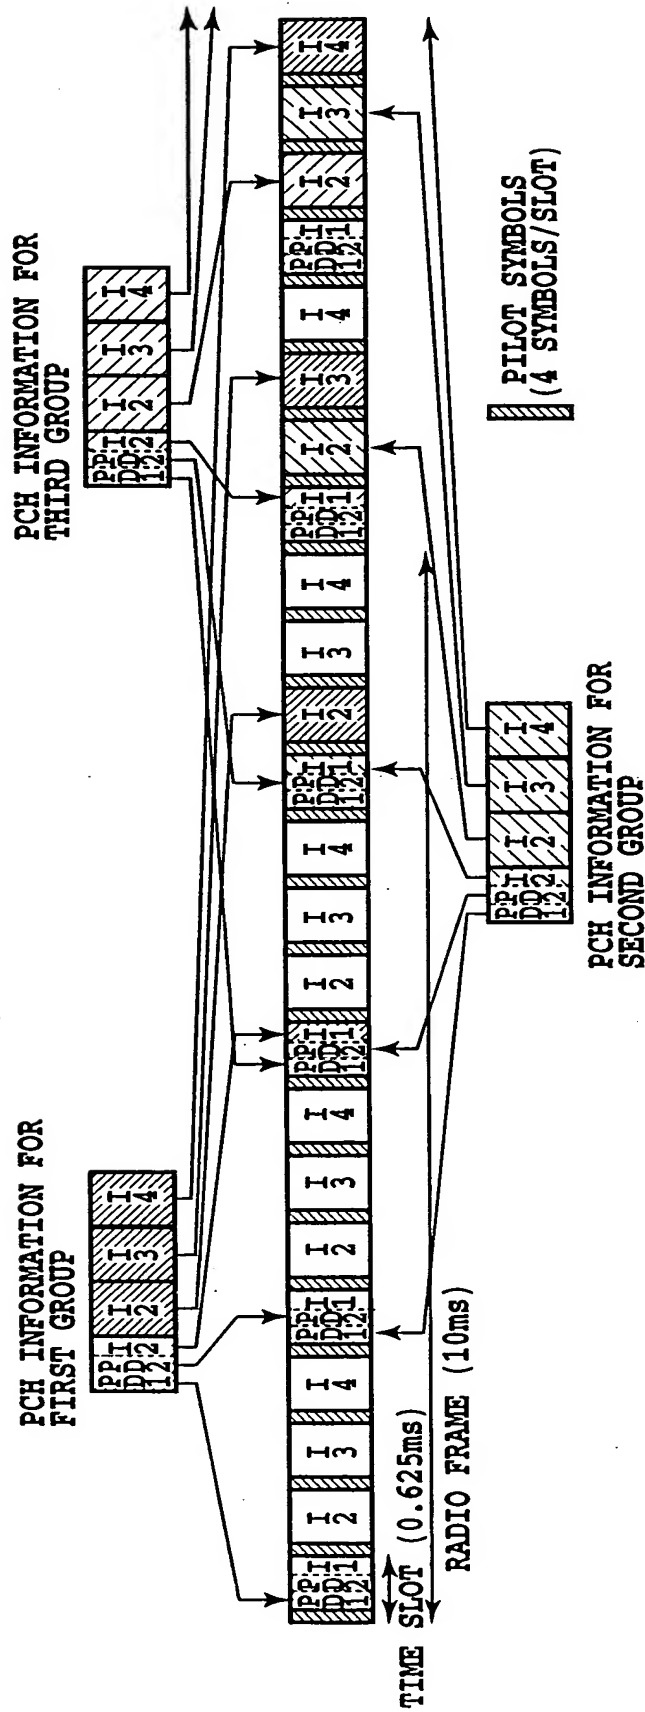


FIG.65B

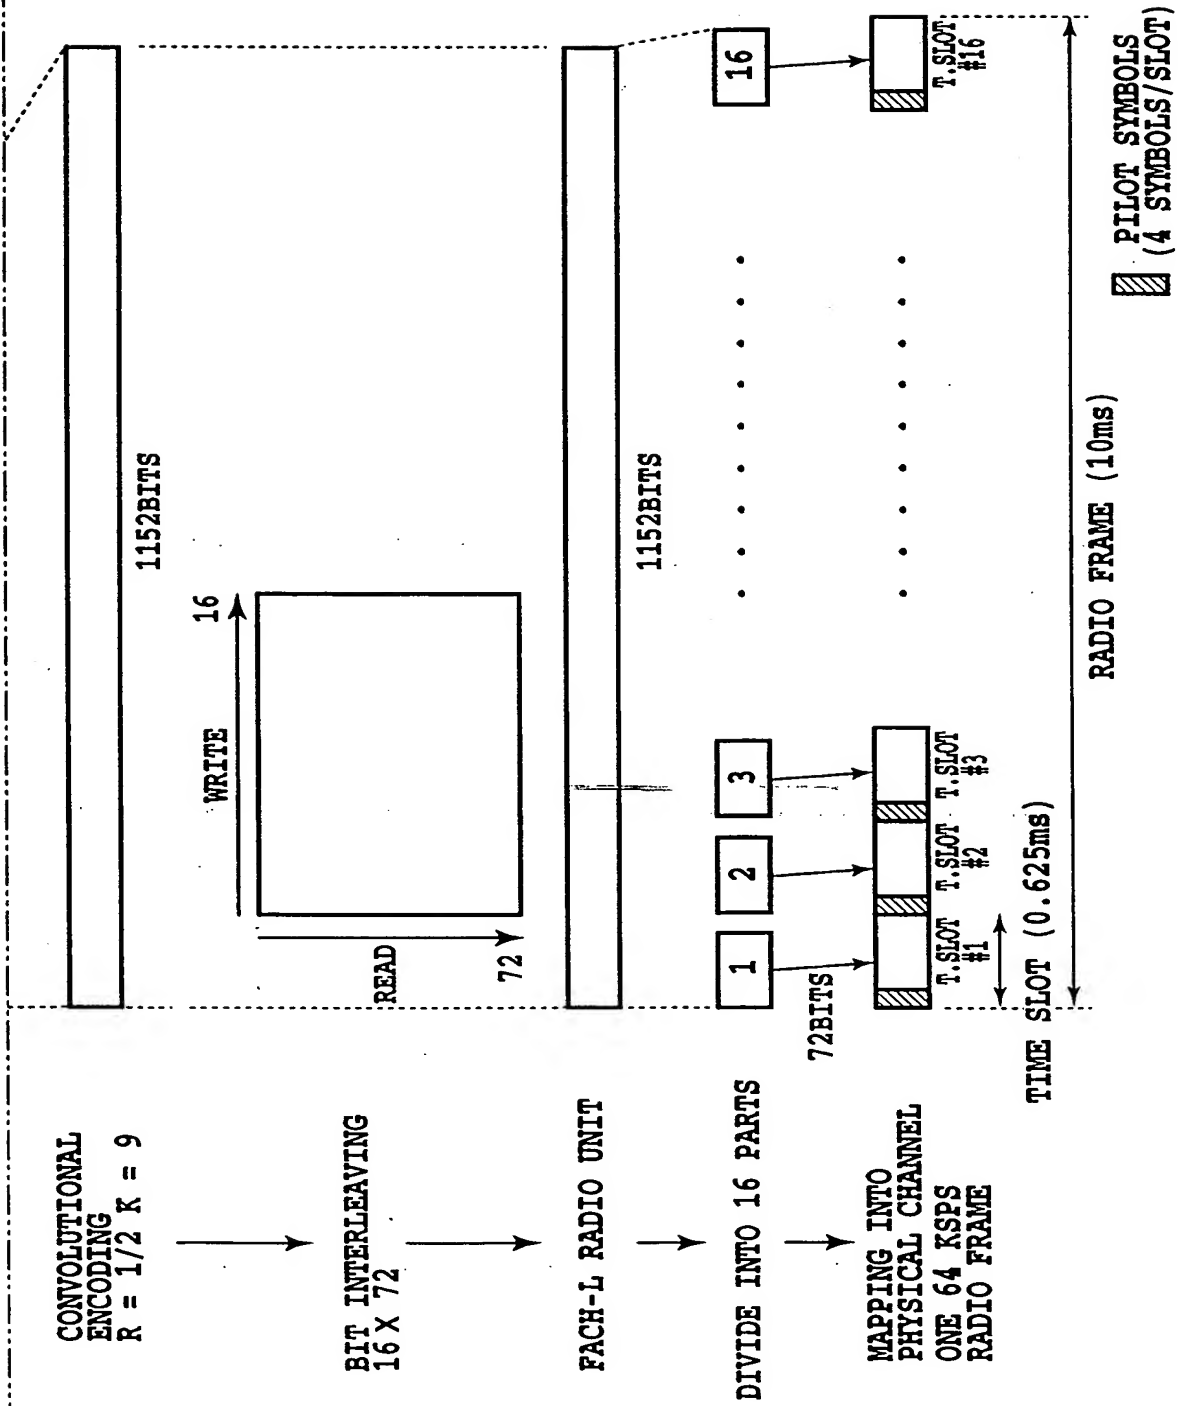


FIG.66B


FIG.67

FIG.67A

FIG.67A

FIG.67B

78/134

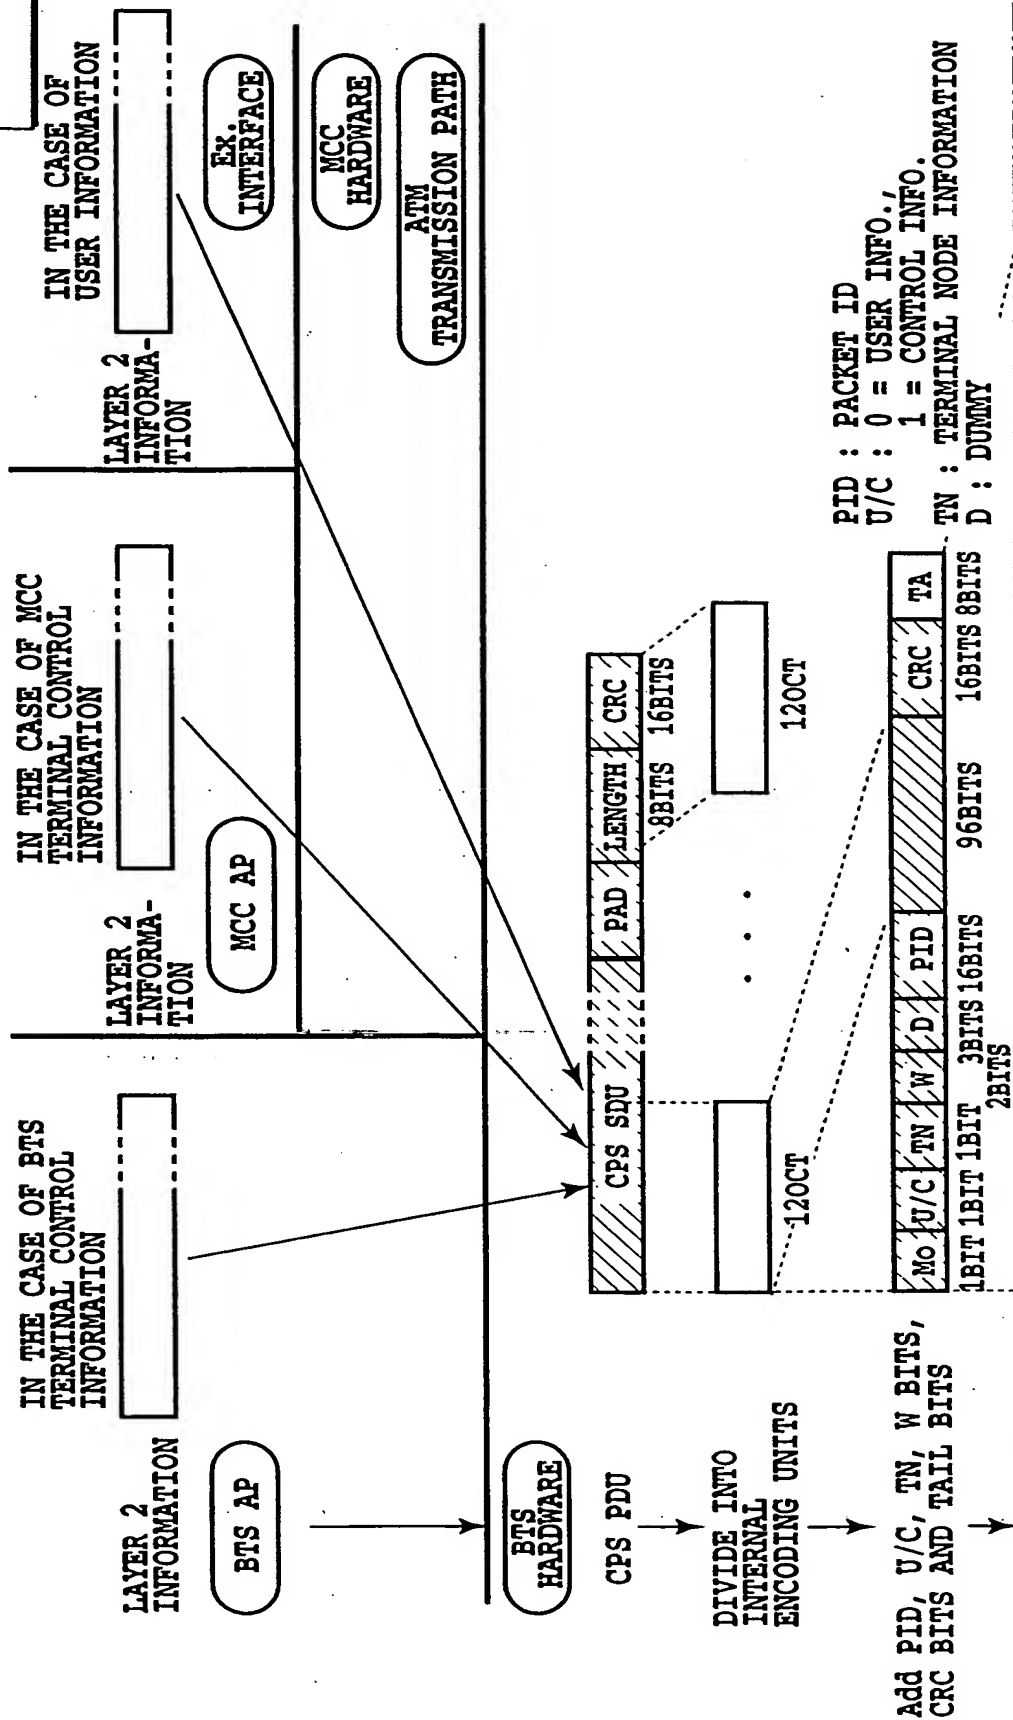

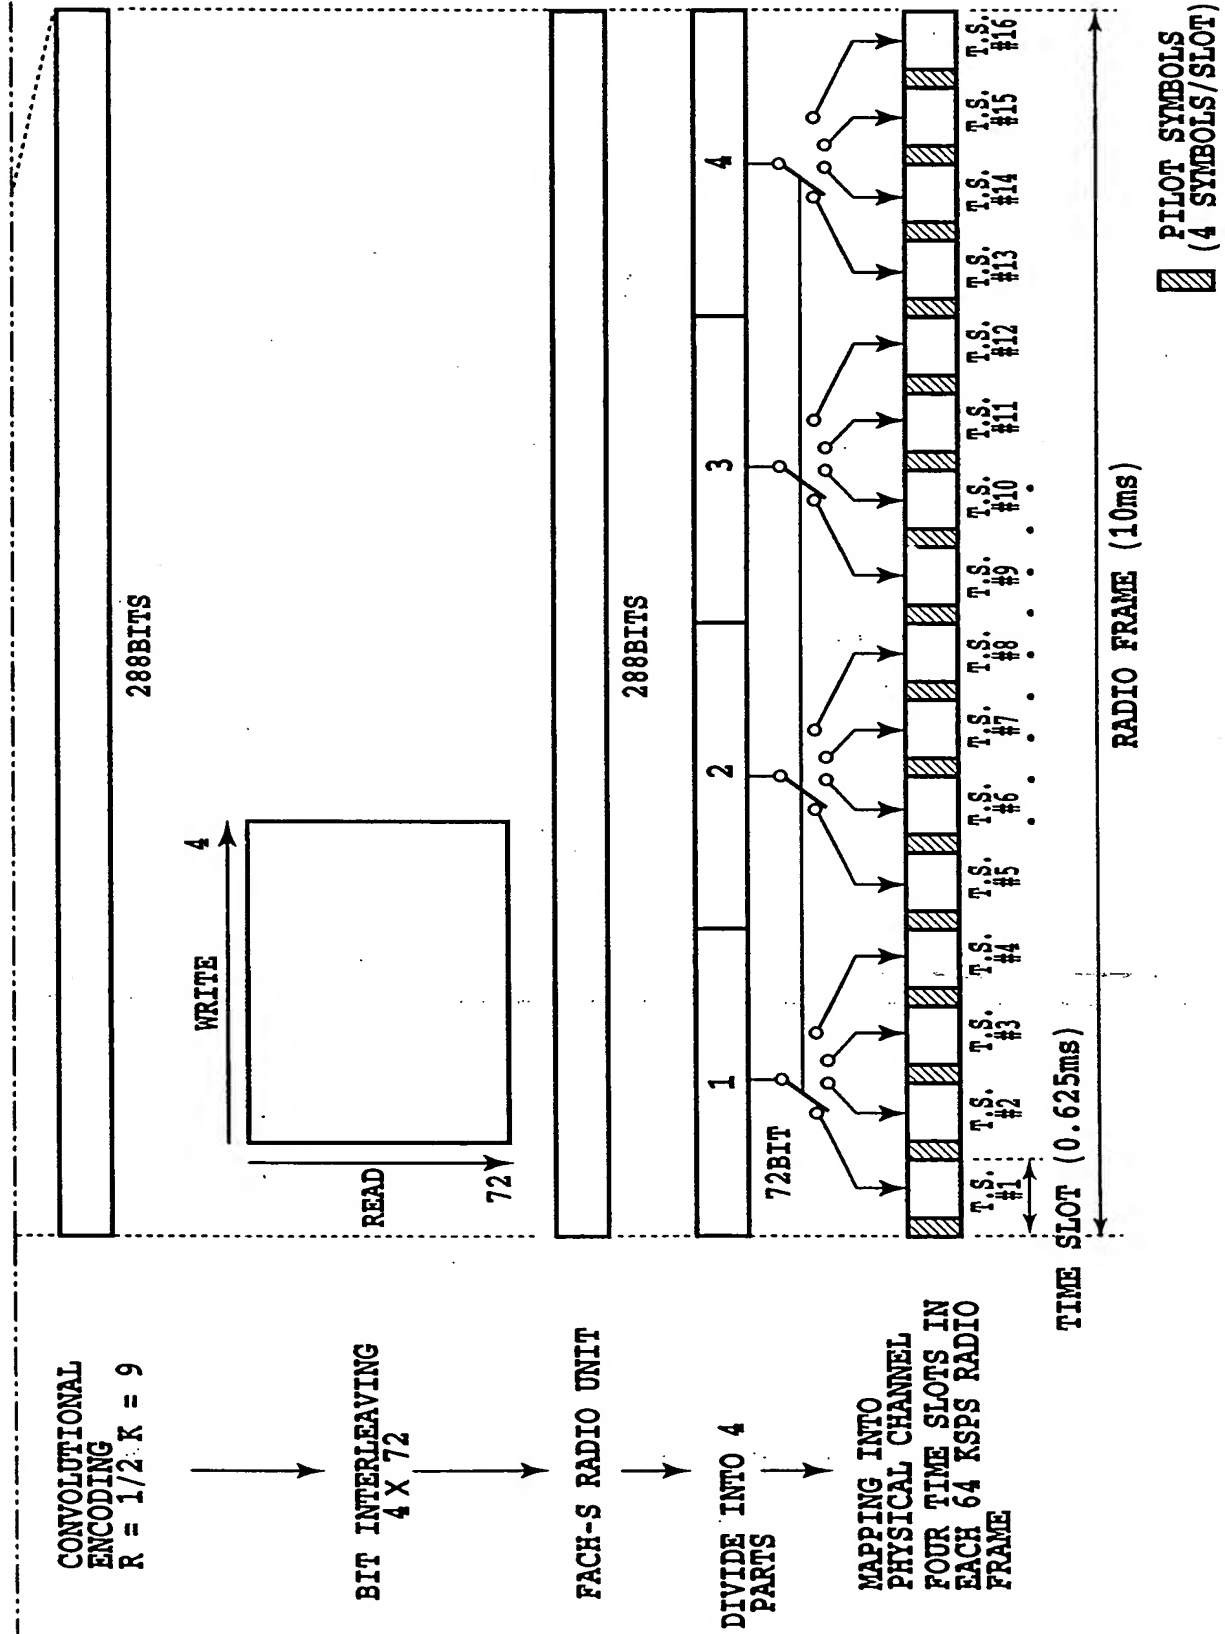


FIG.67B

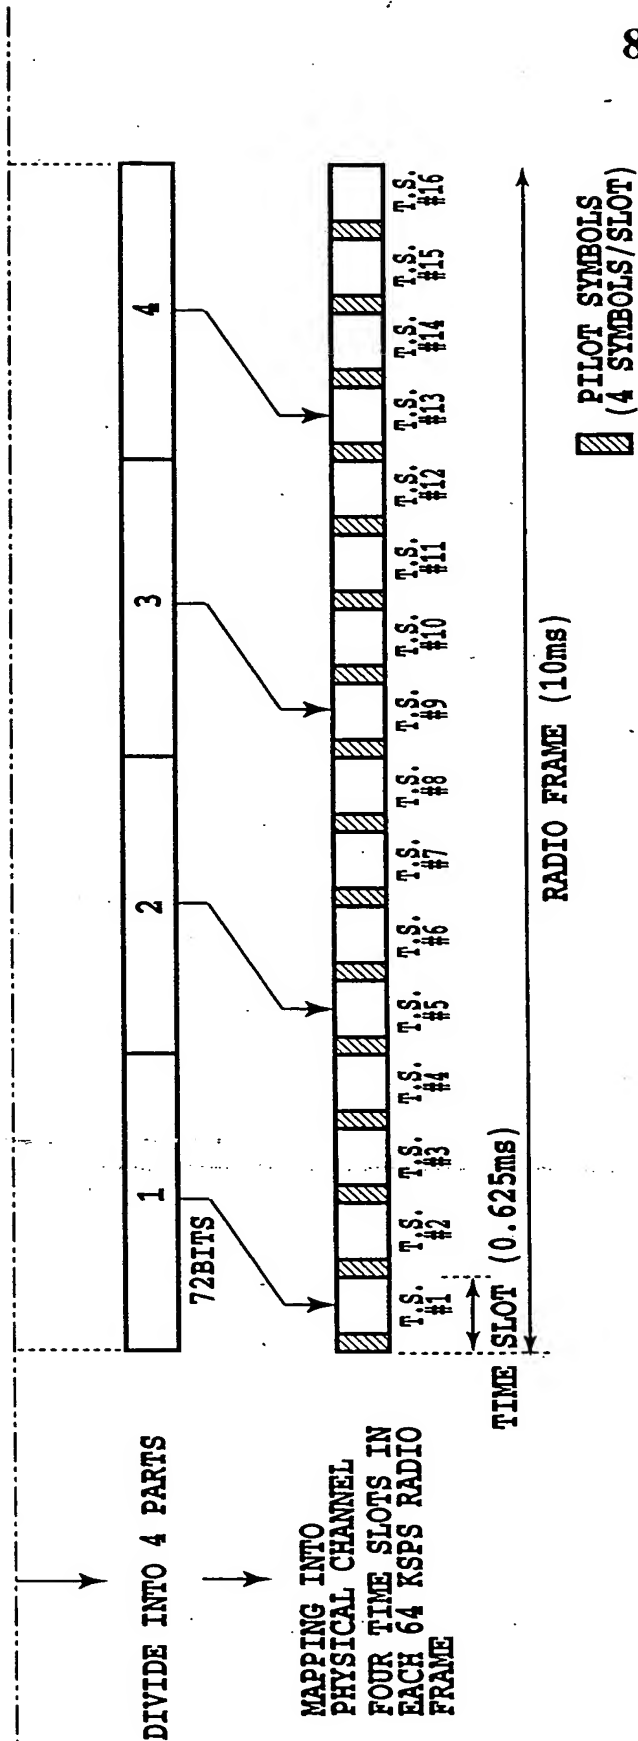
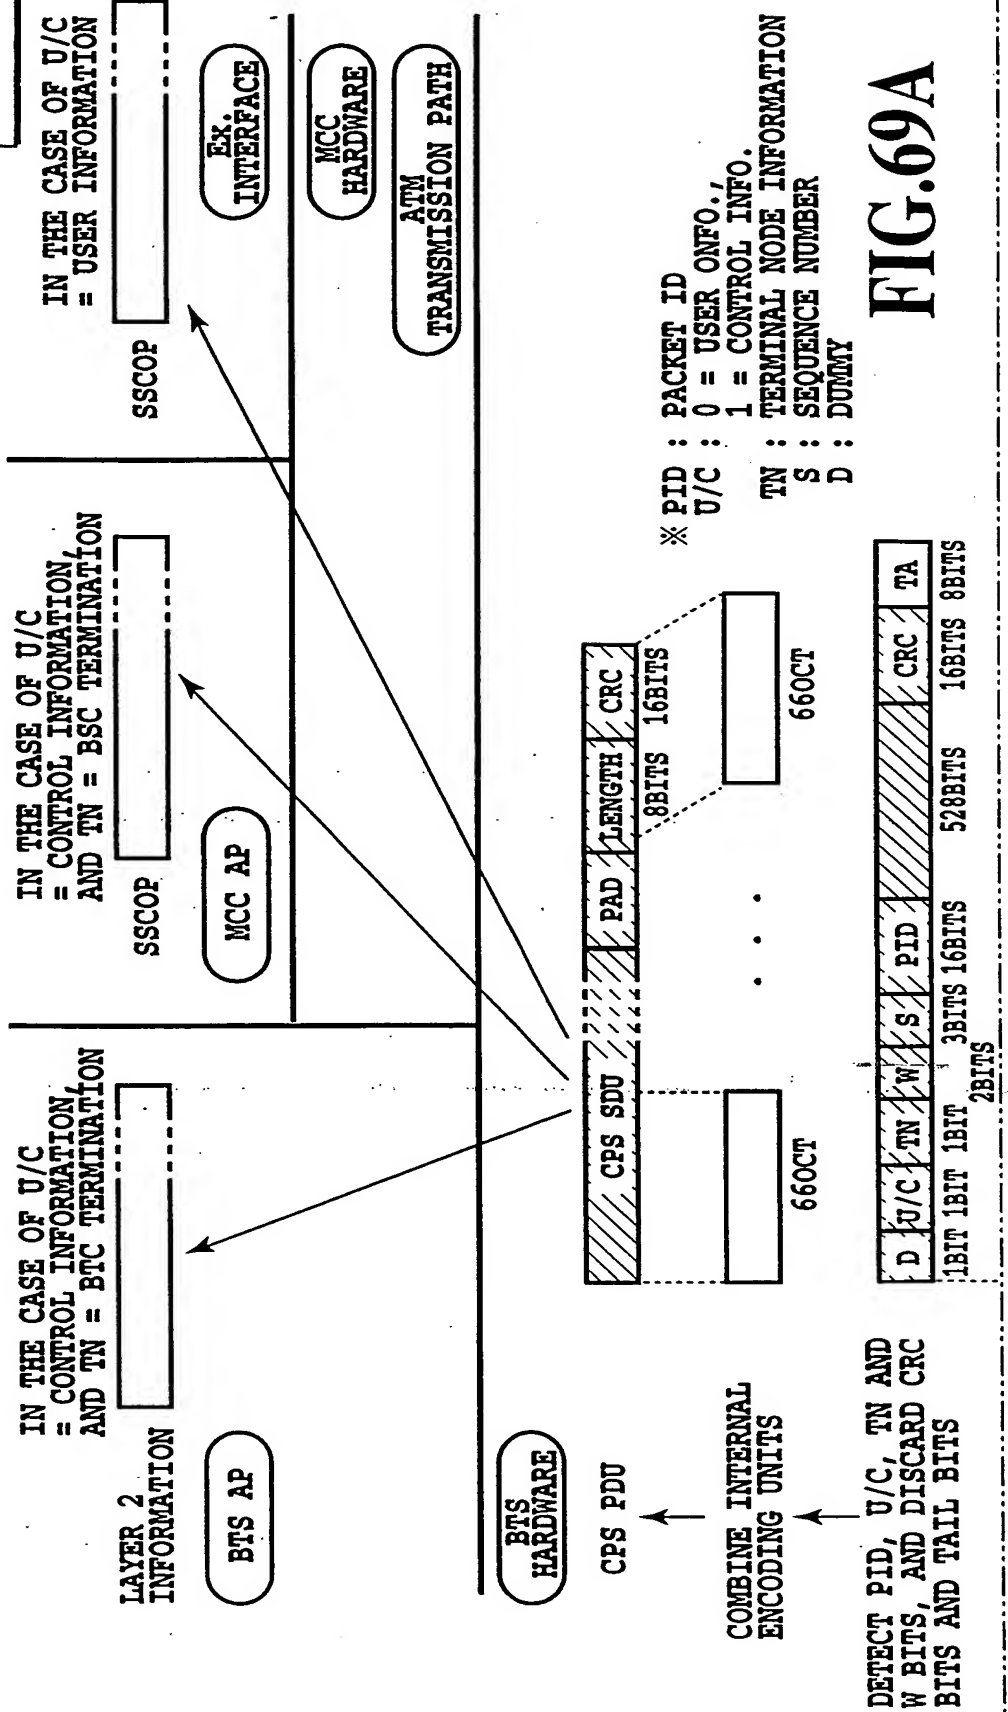


FIG.68B

FIG. 69

FIG. 69A

FIG. 69B



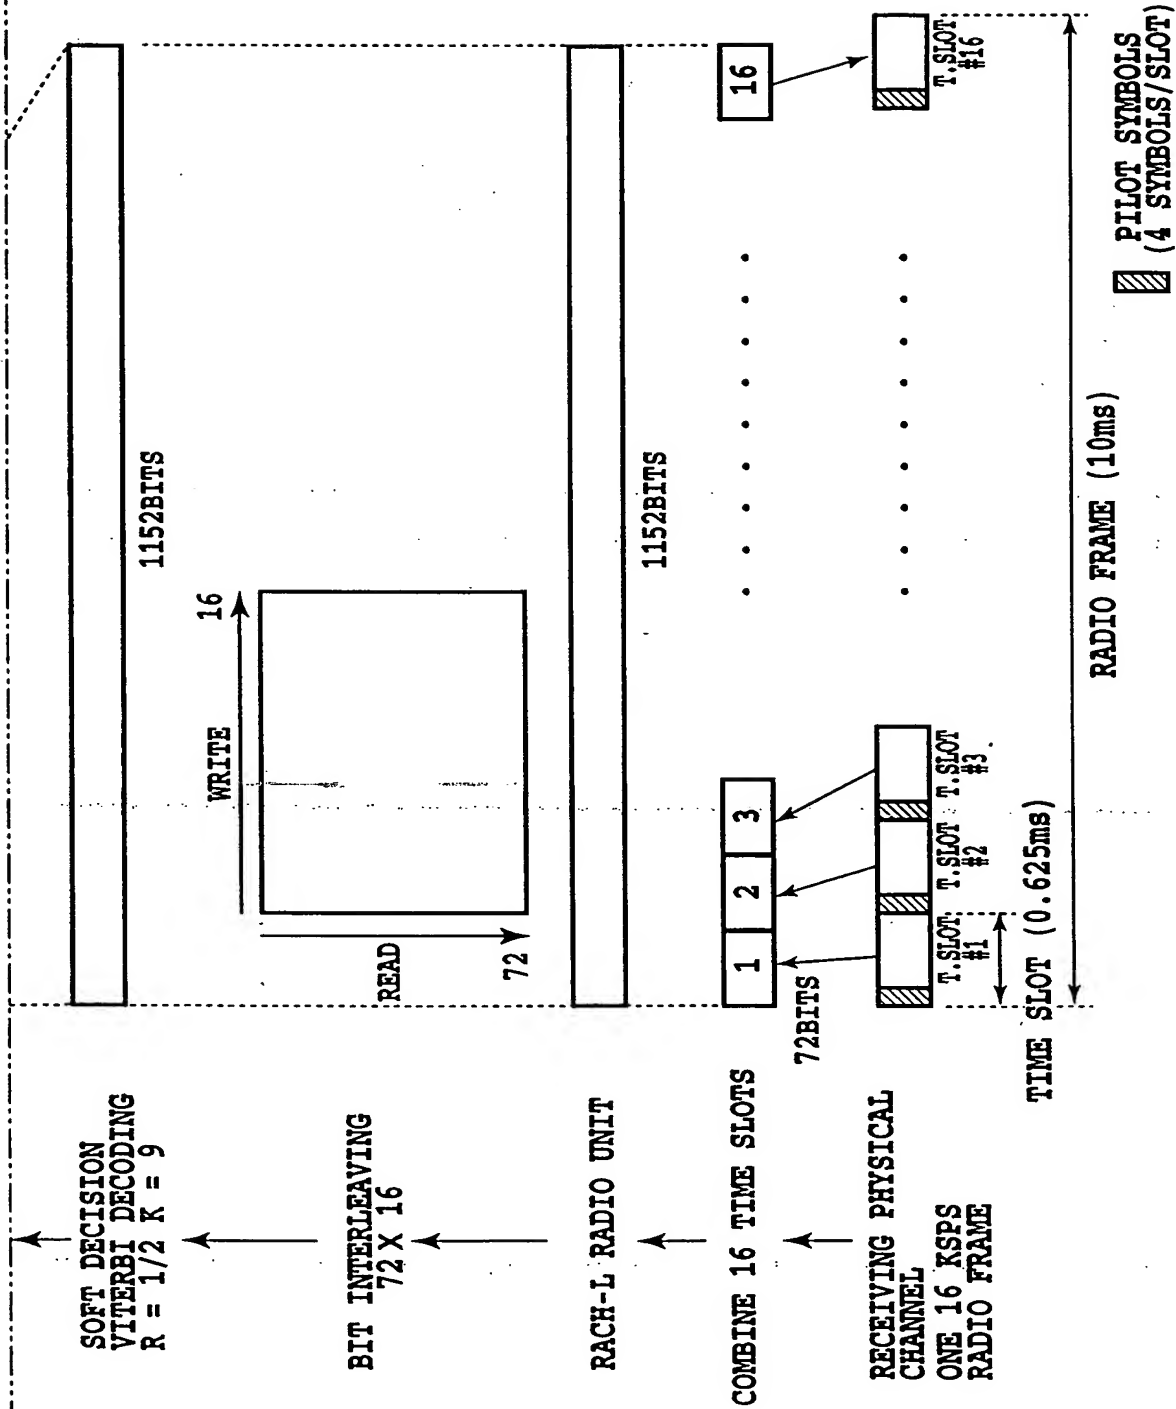


FIG.69B

FIG.70

FIG.70A

FIG.70B

84/134

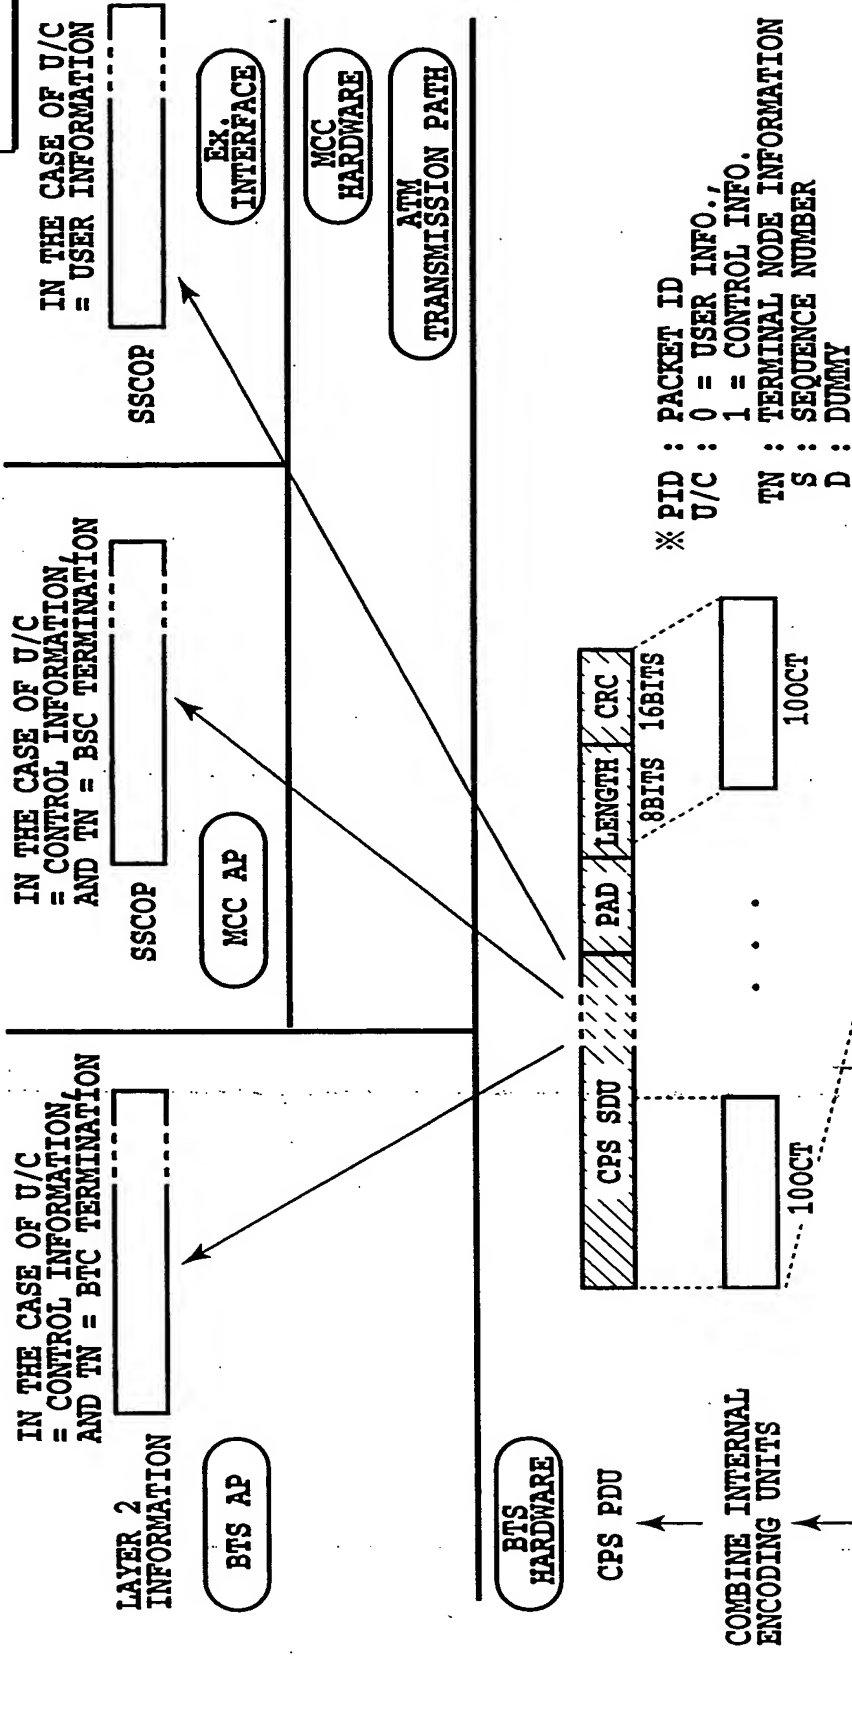


FIG.70A

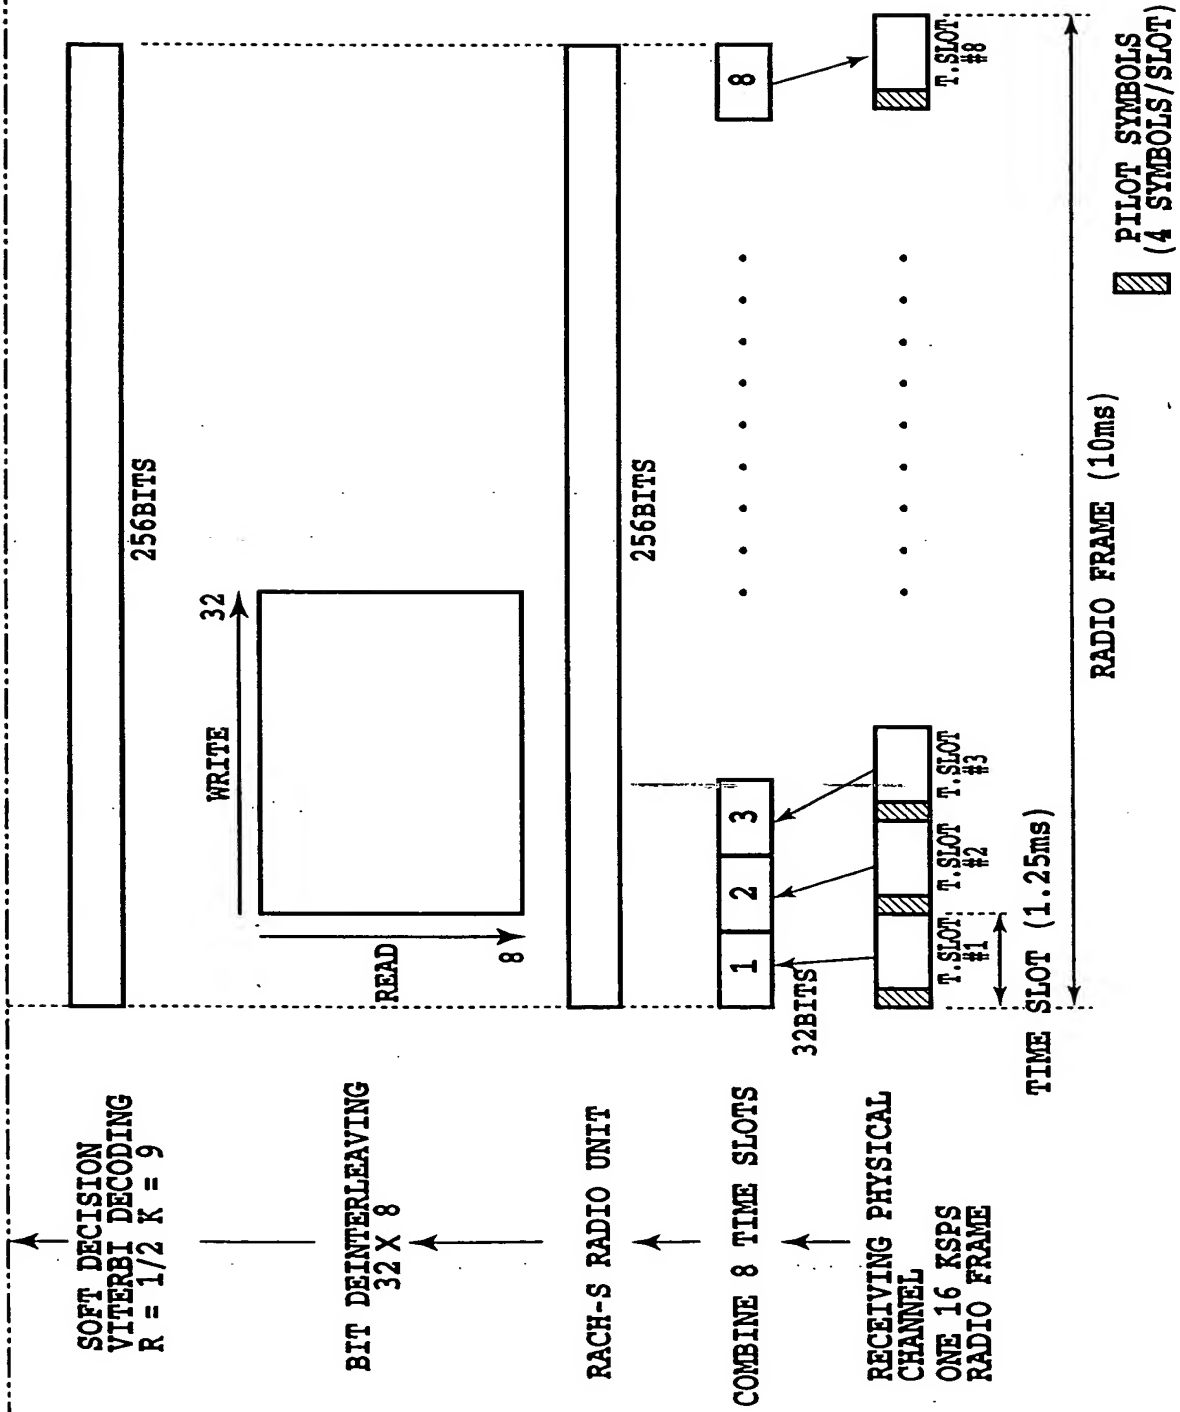
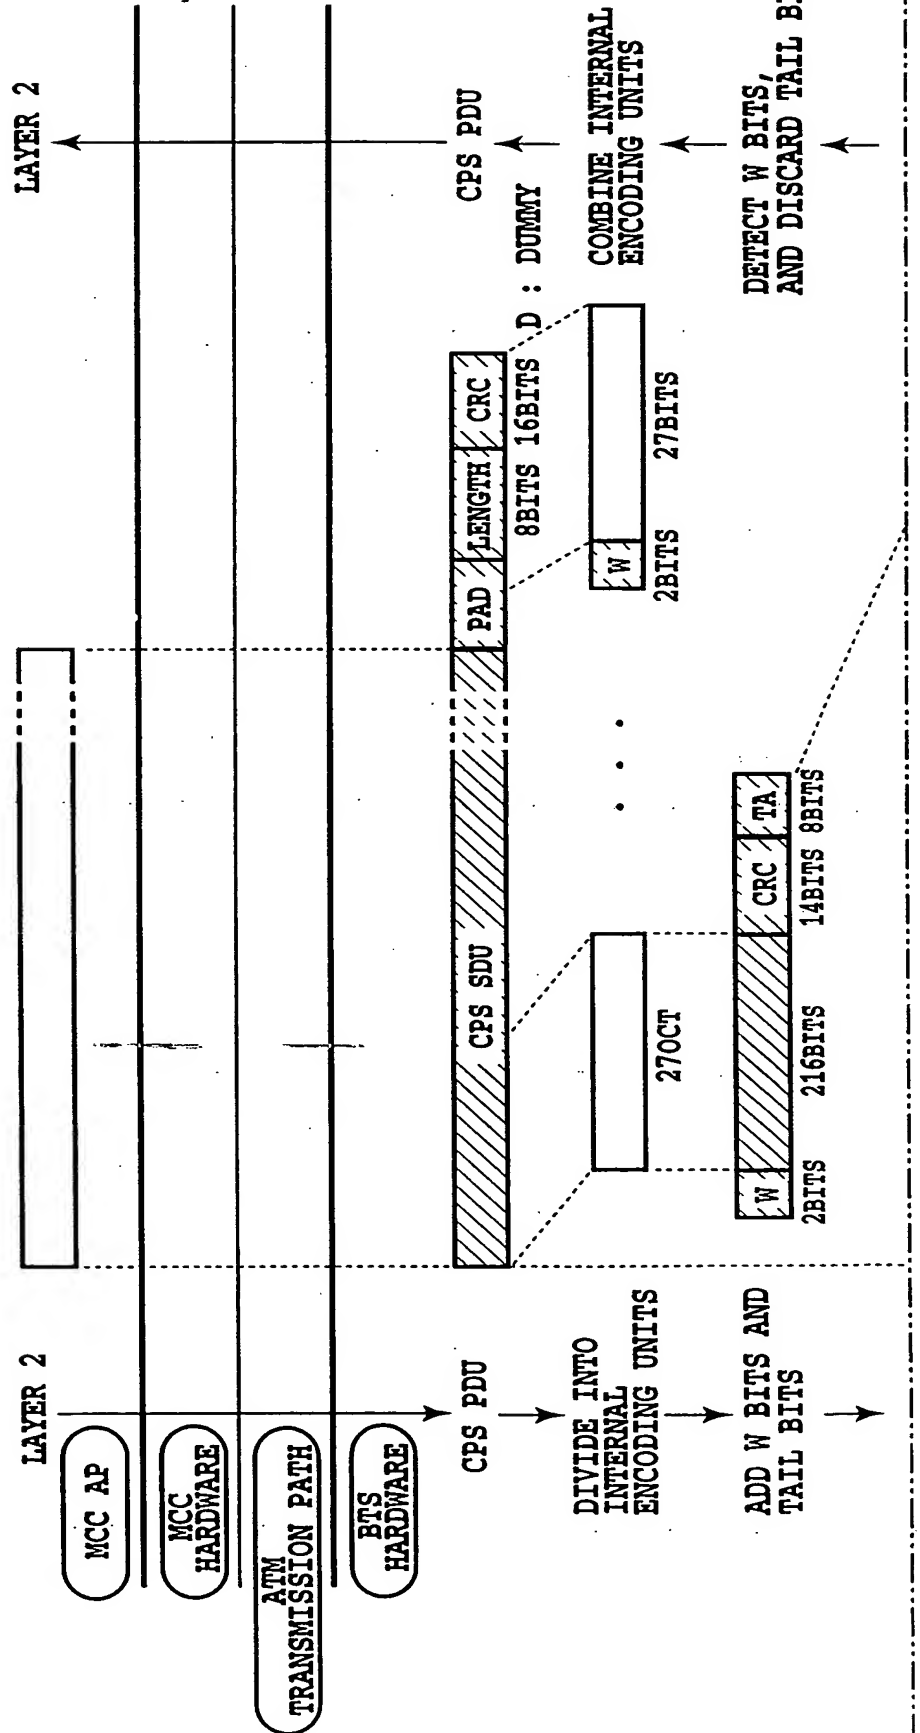


FIG.70B

FIG. 71A



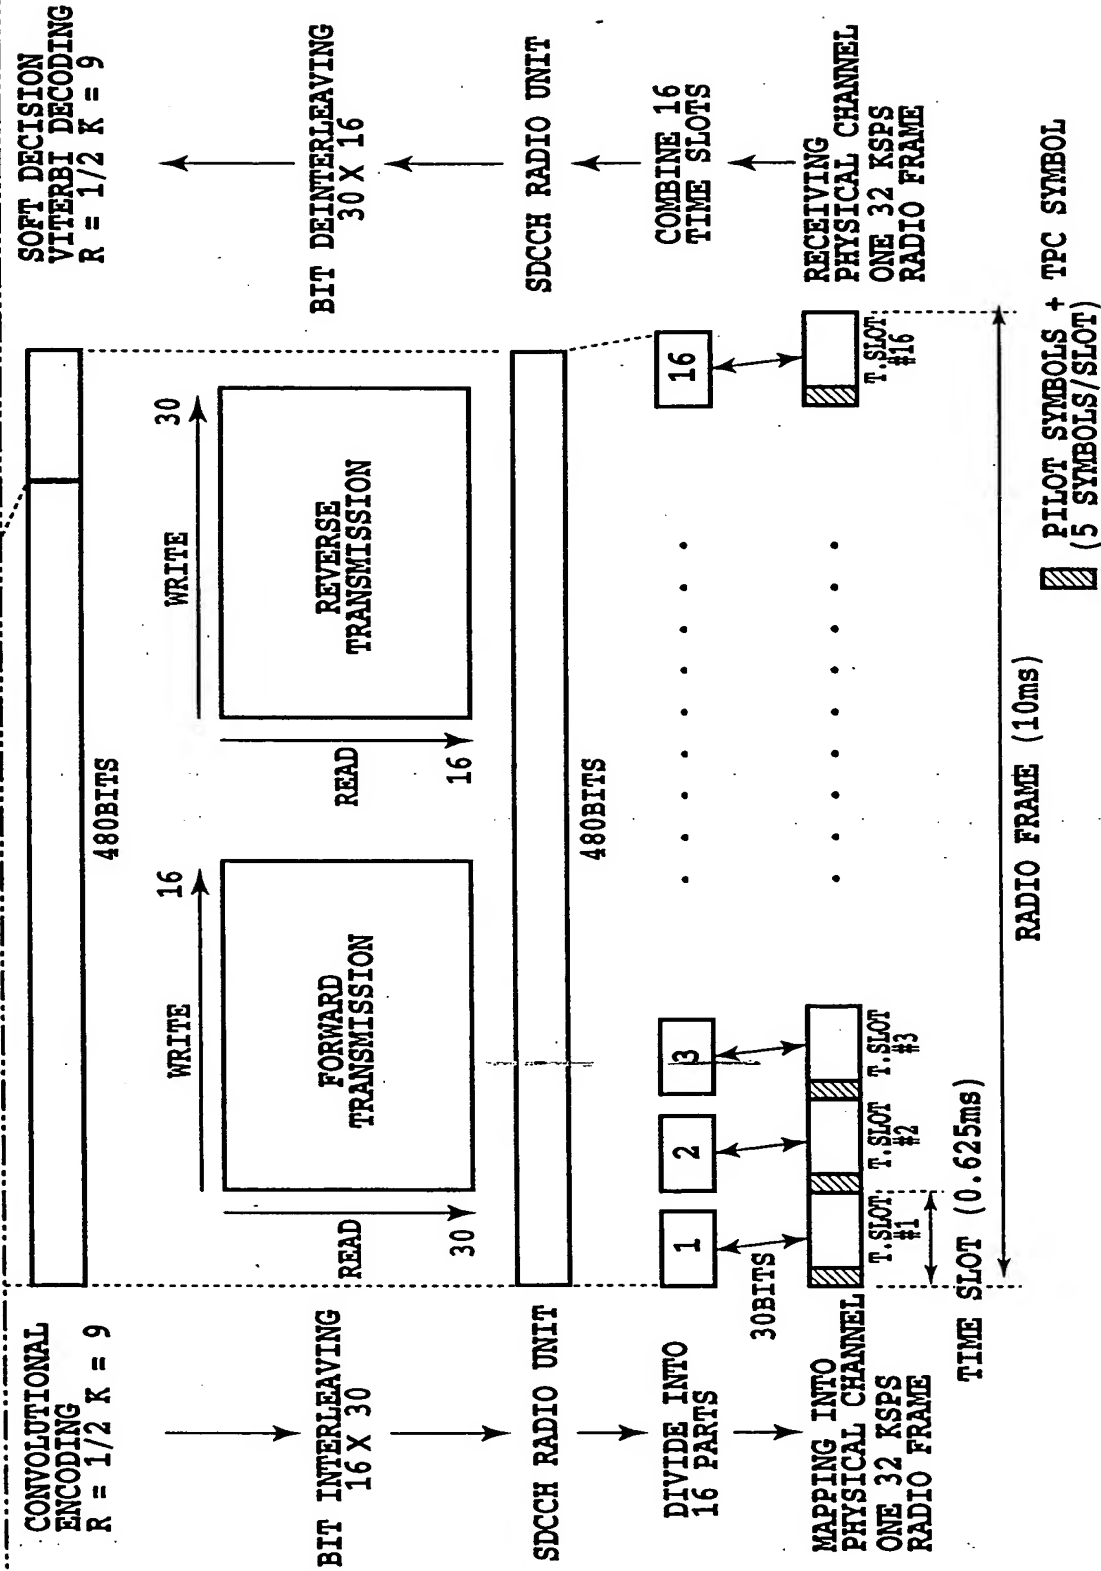


FIG.71B


FIG.72

FIG.72A

FIG.72B

FIG.72A

88/134

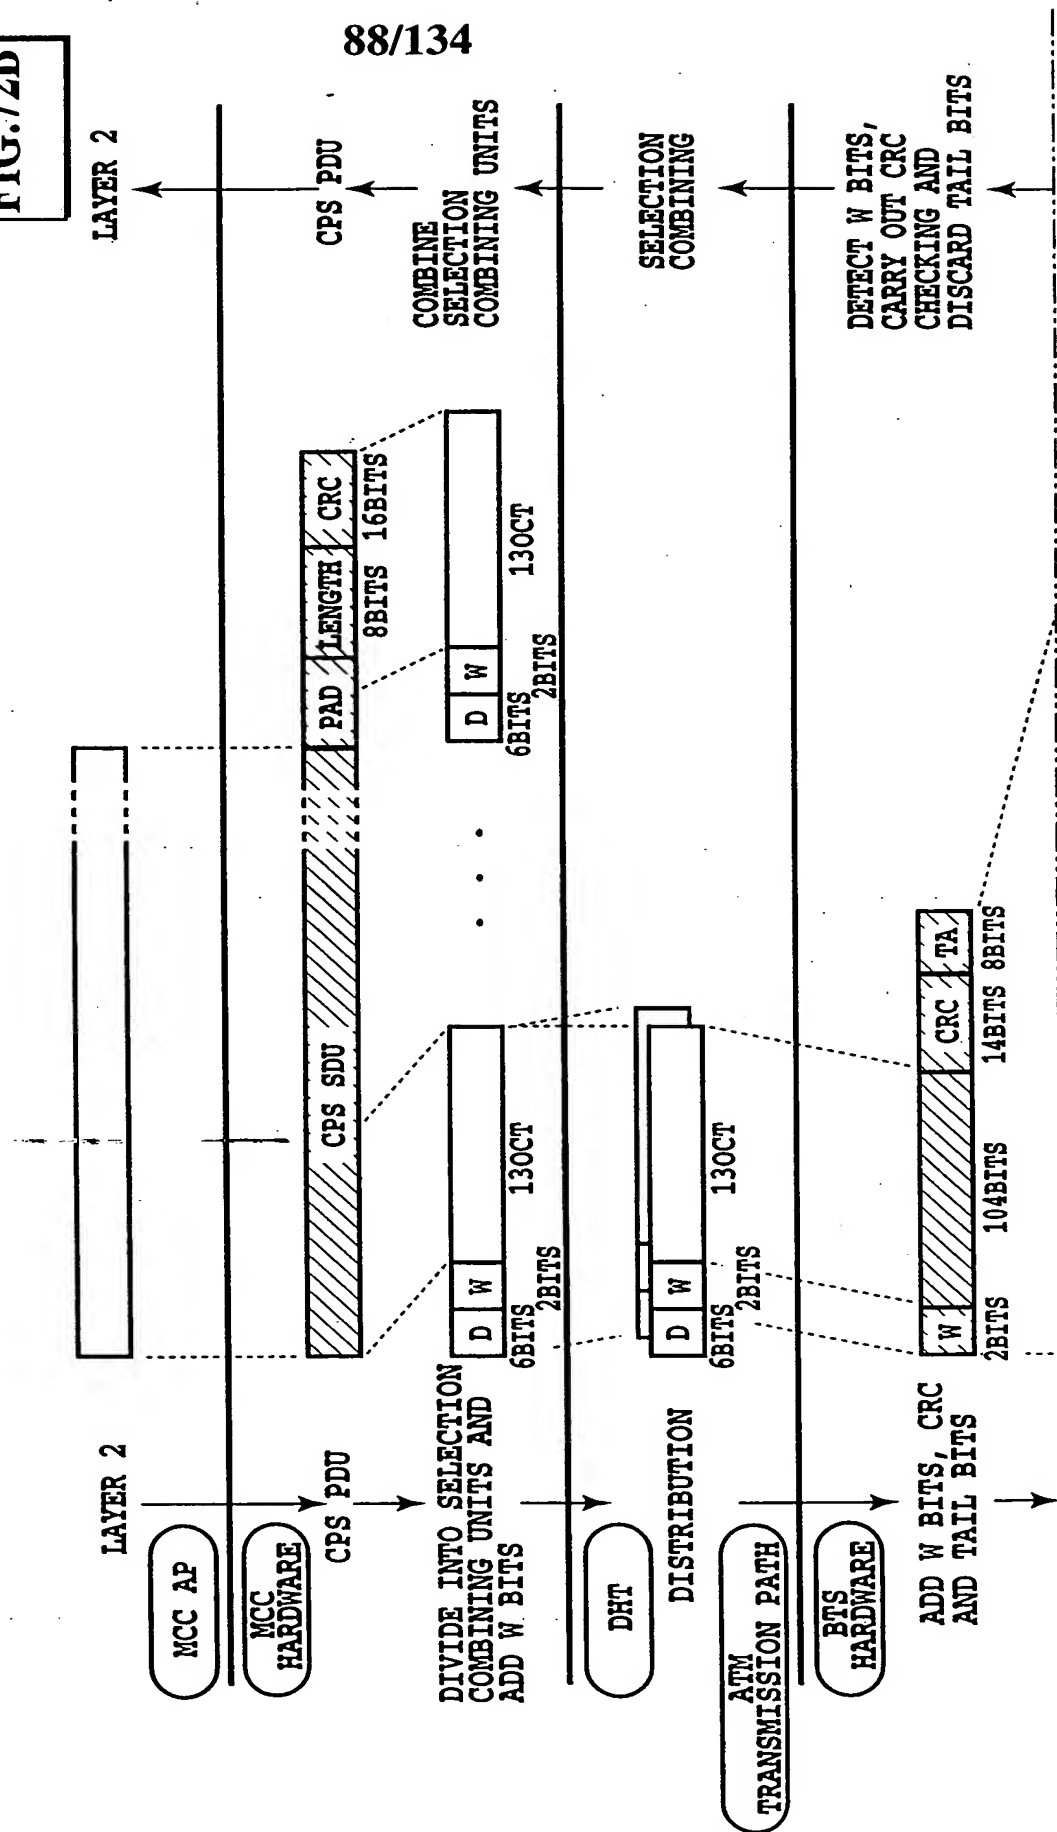

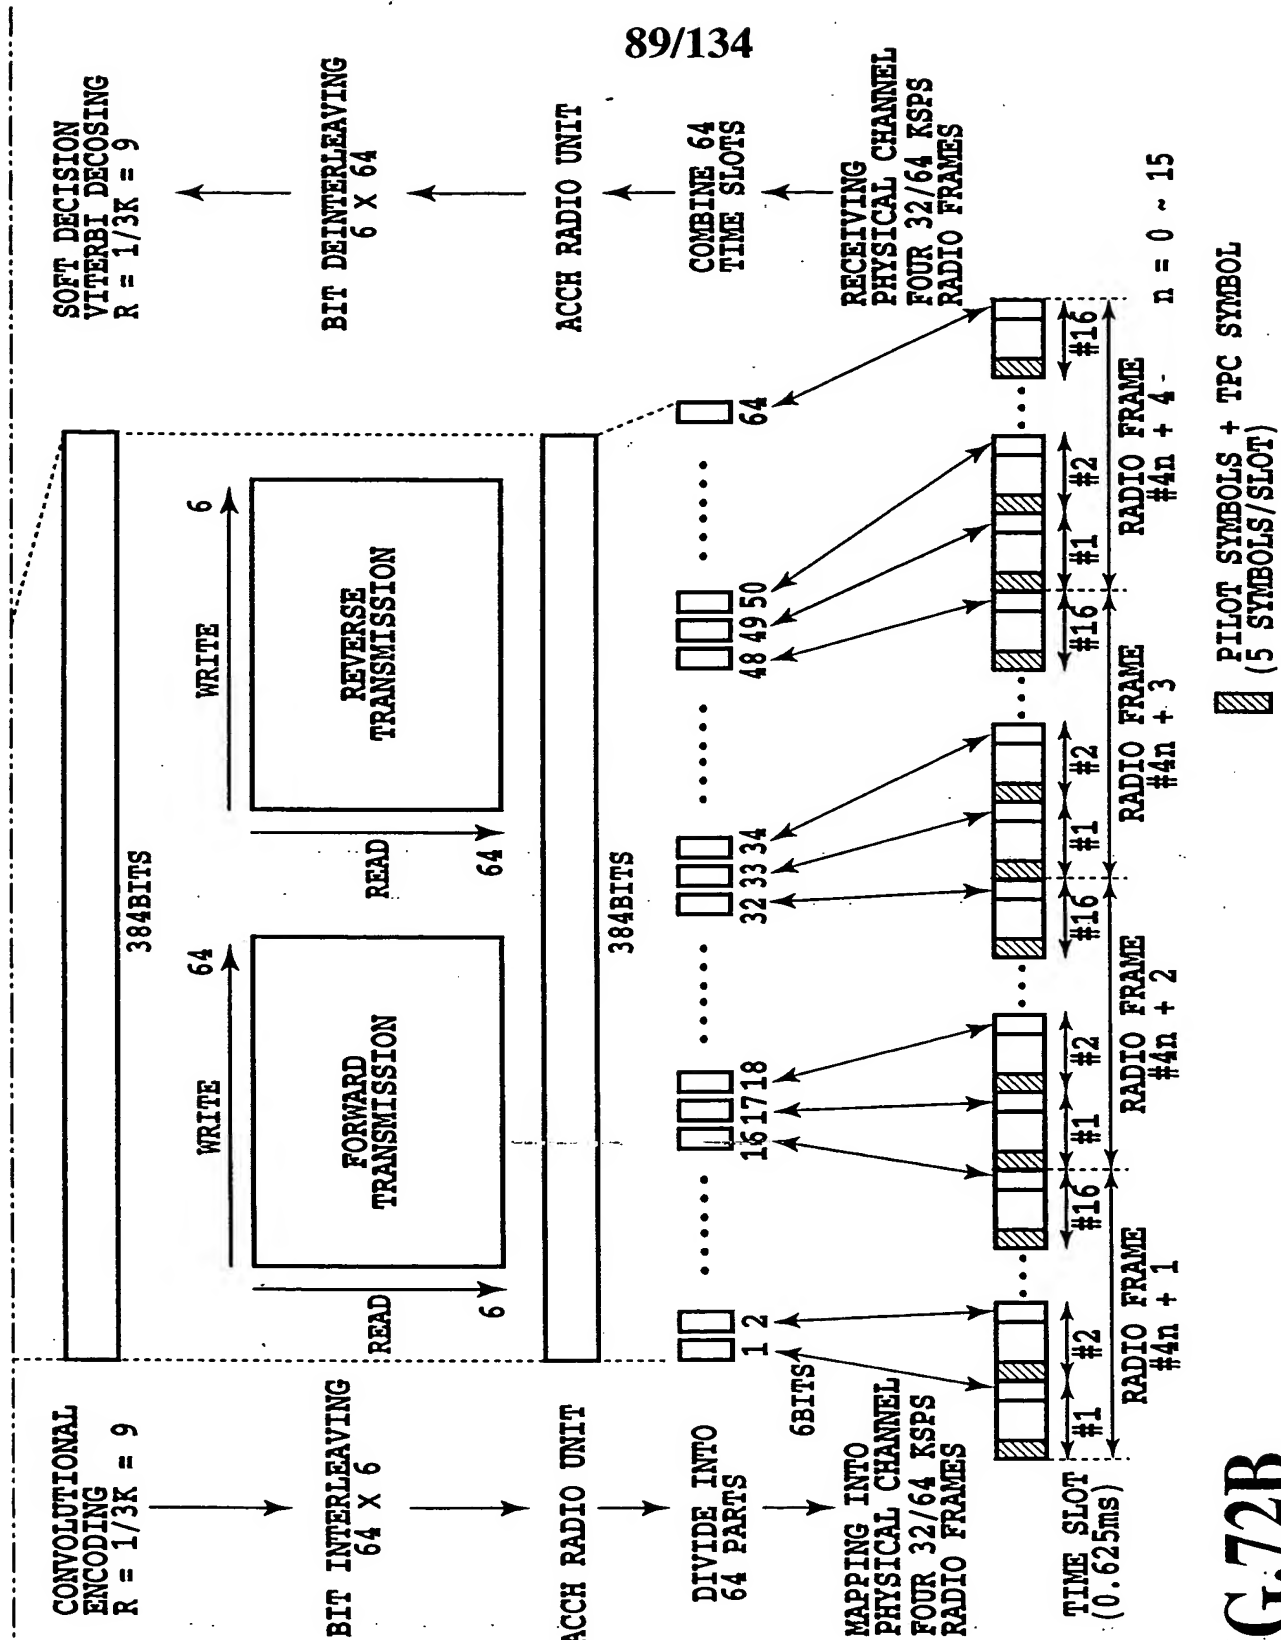


FIG.72B


FIG.73

FIG.73A

FIG.73B

90/134

FIG.73A

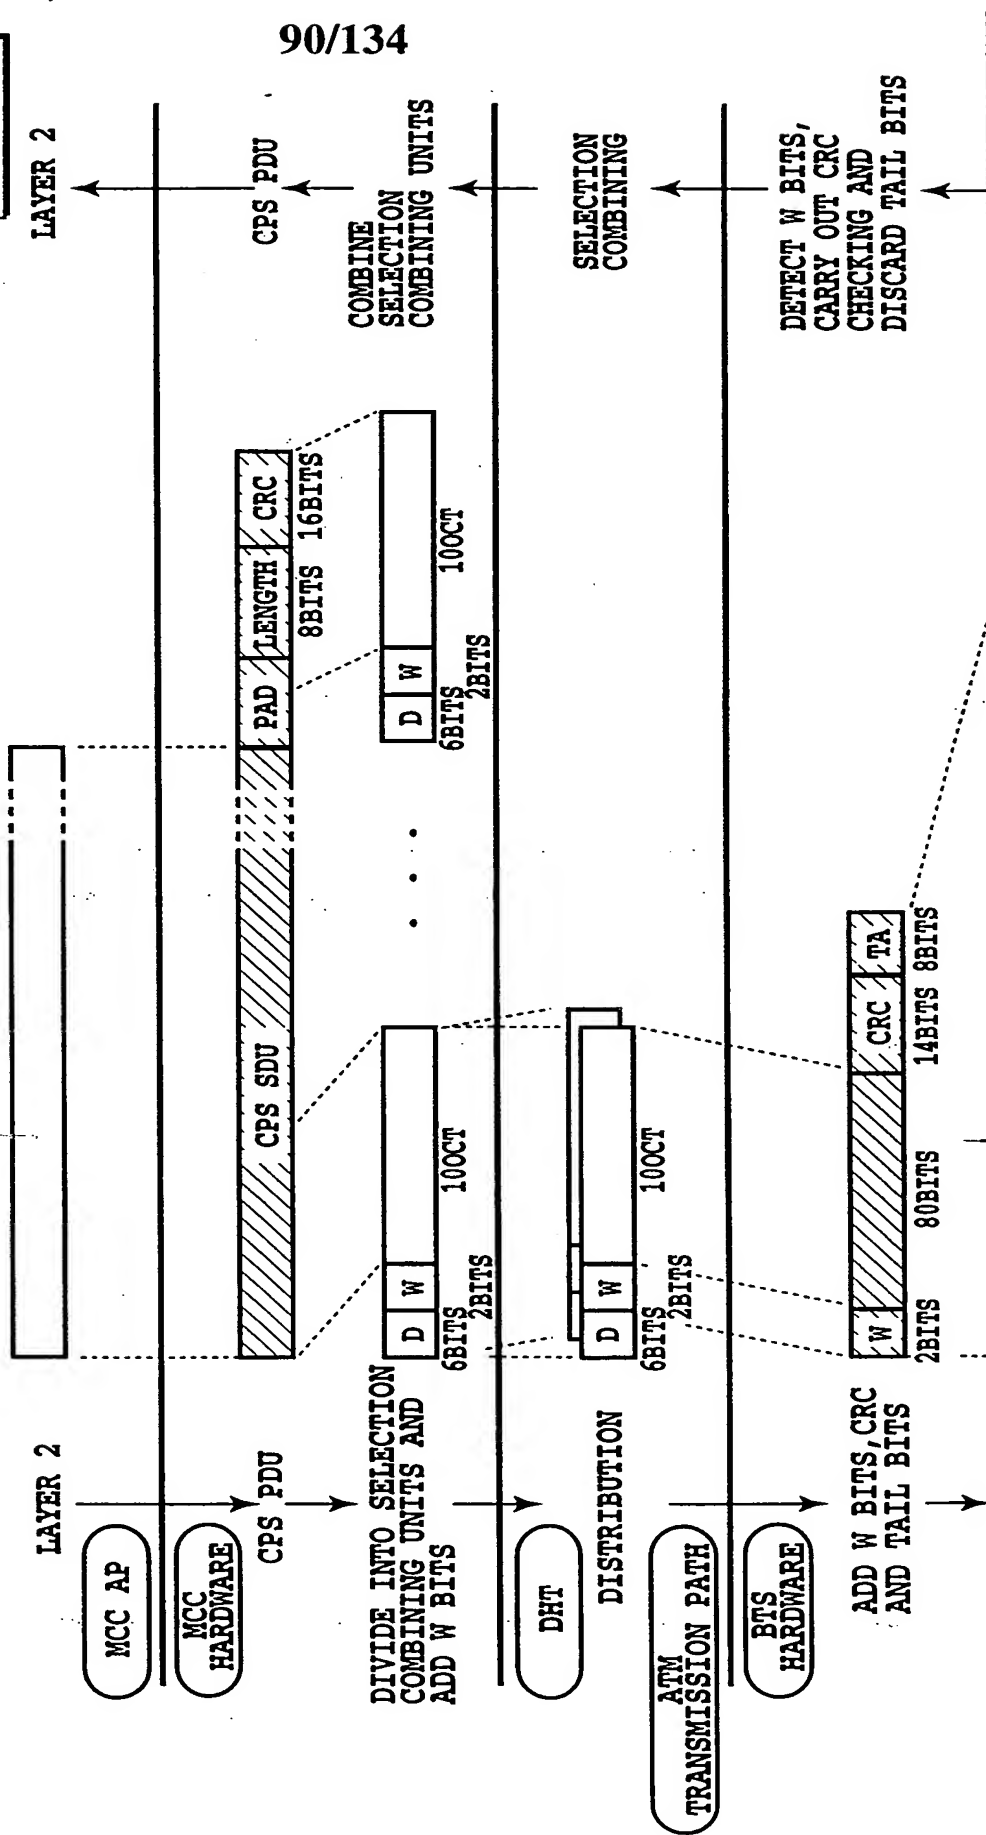

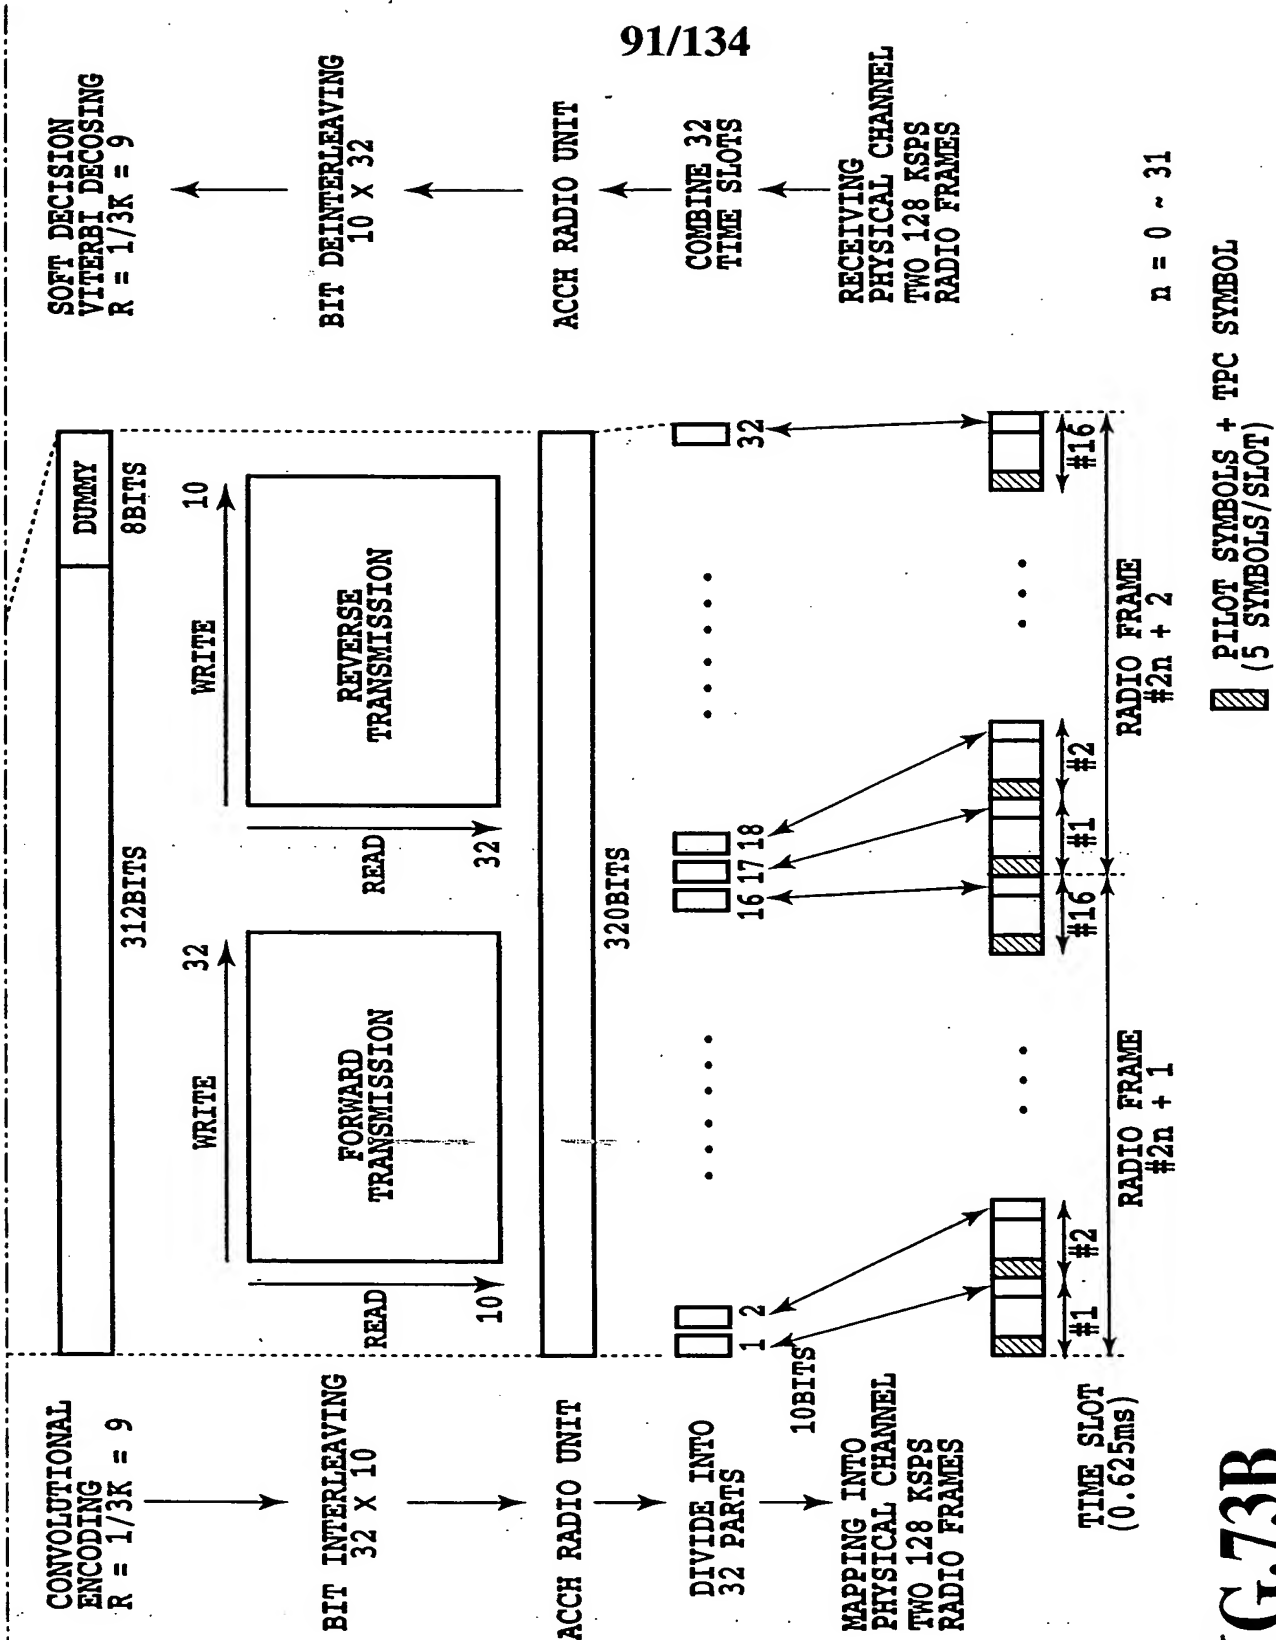



FIG.74


FIG.74A

FIG.74B

92/134

FIG.74A

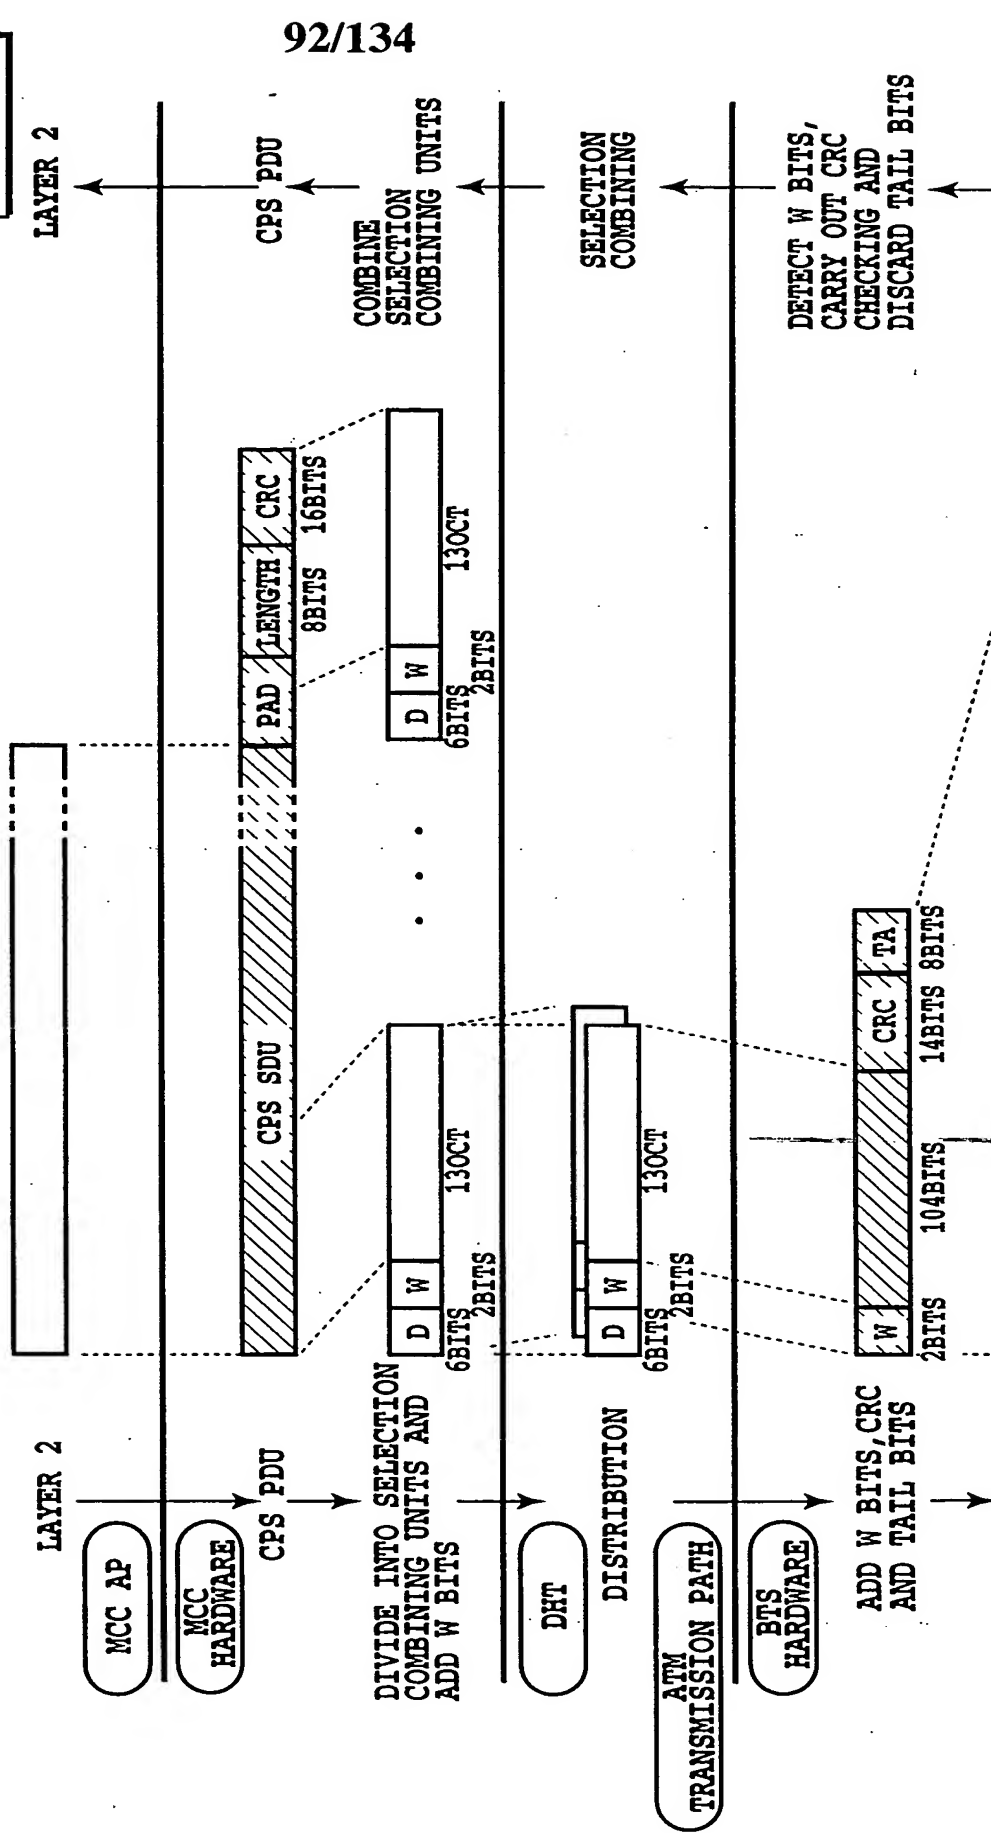

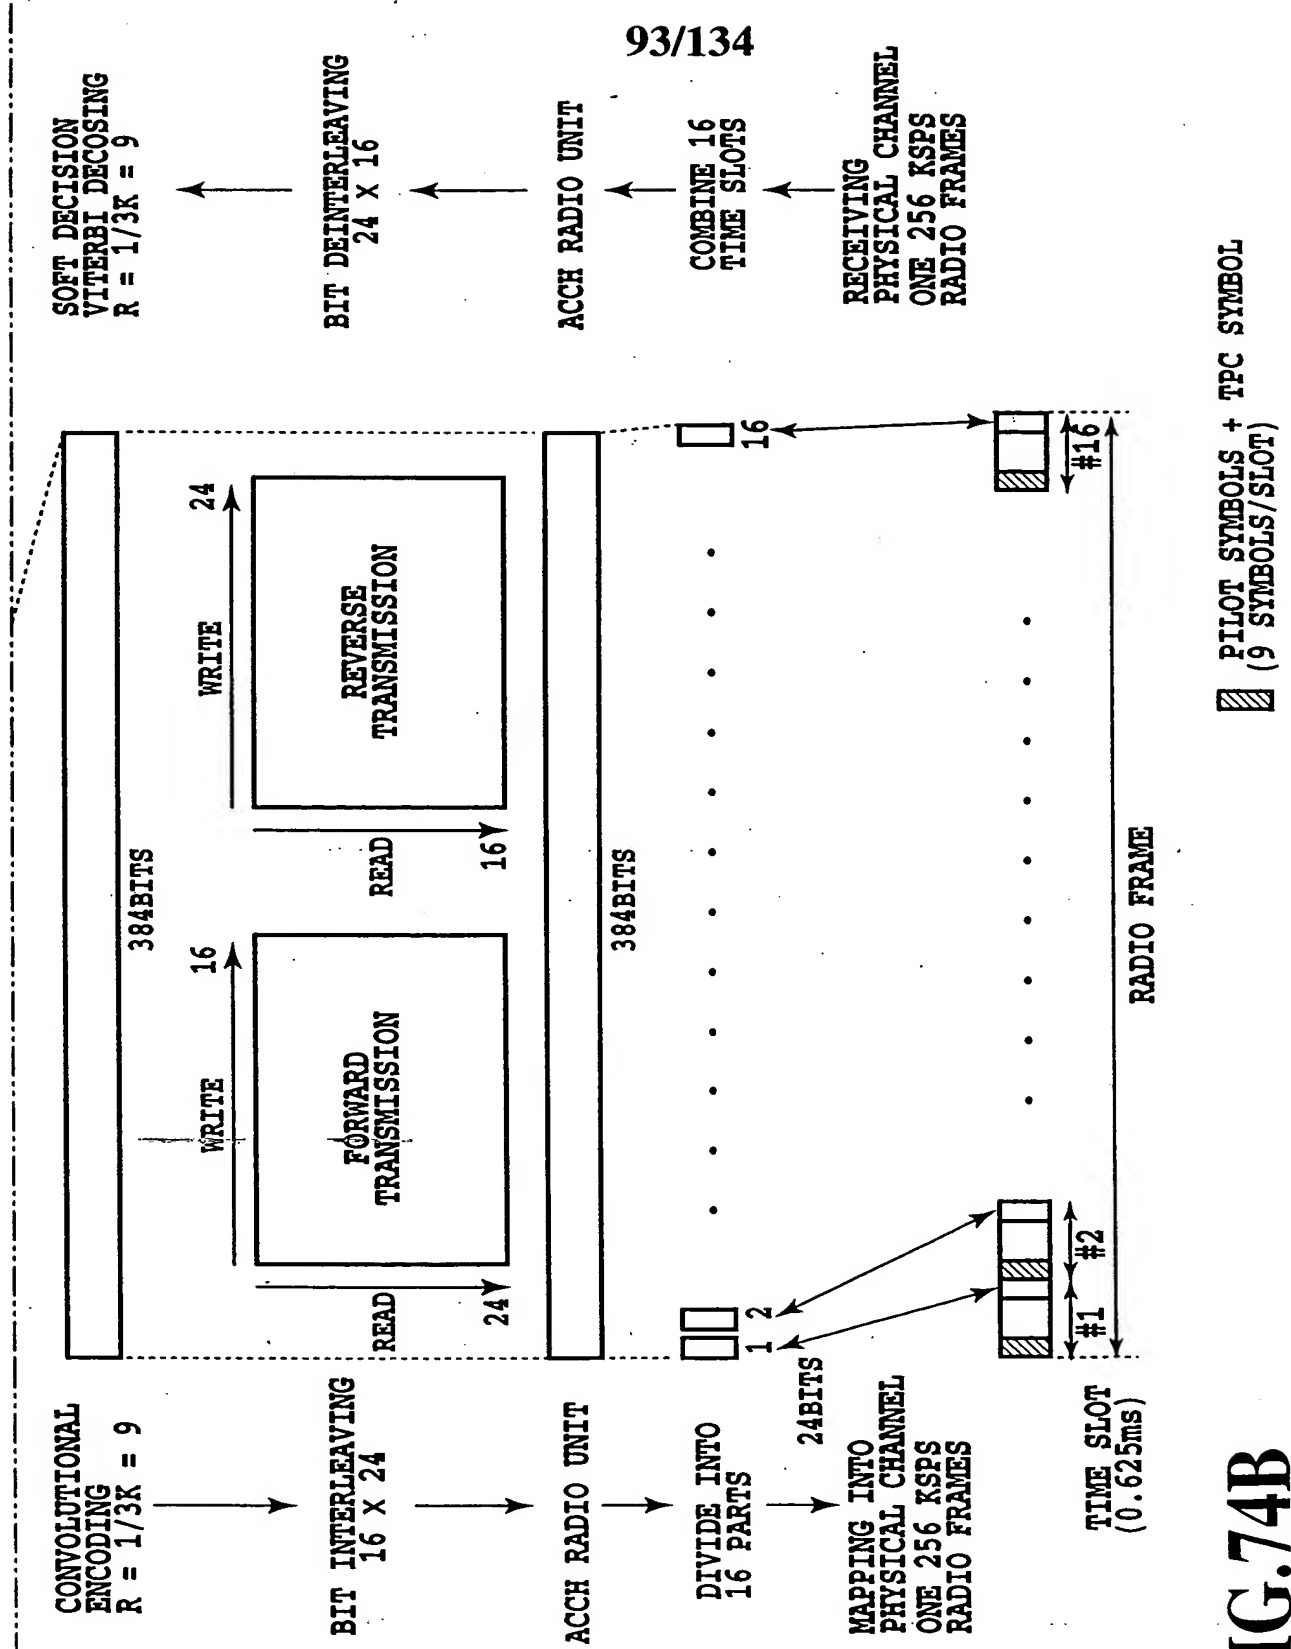

93/134


FIG.74B

FIG.75

FIG.75A

FIG.75B

FIG.75A

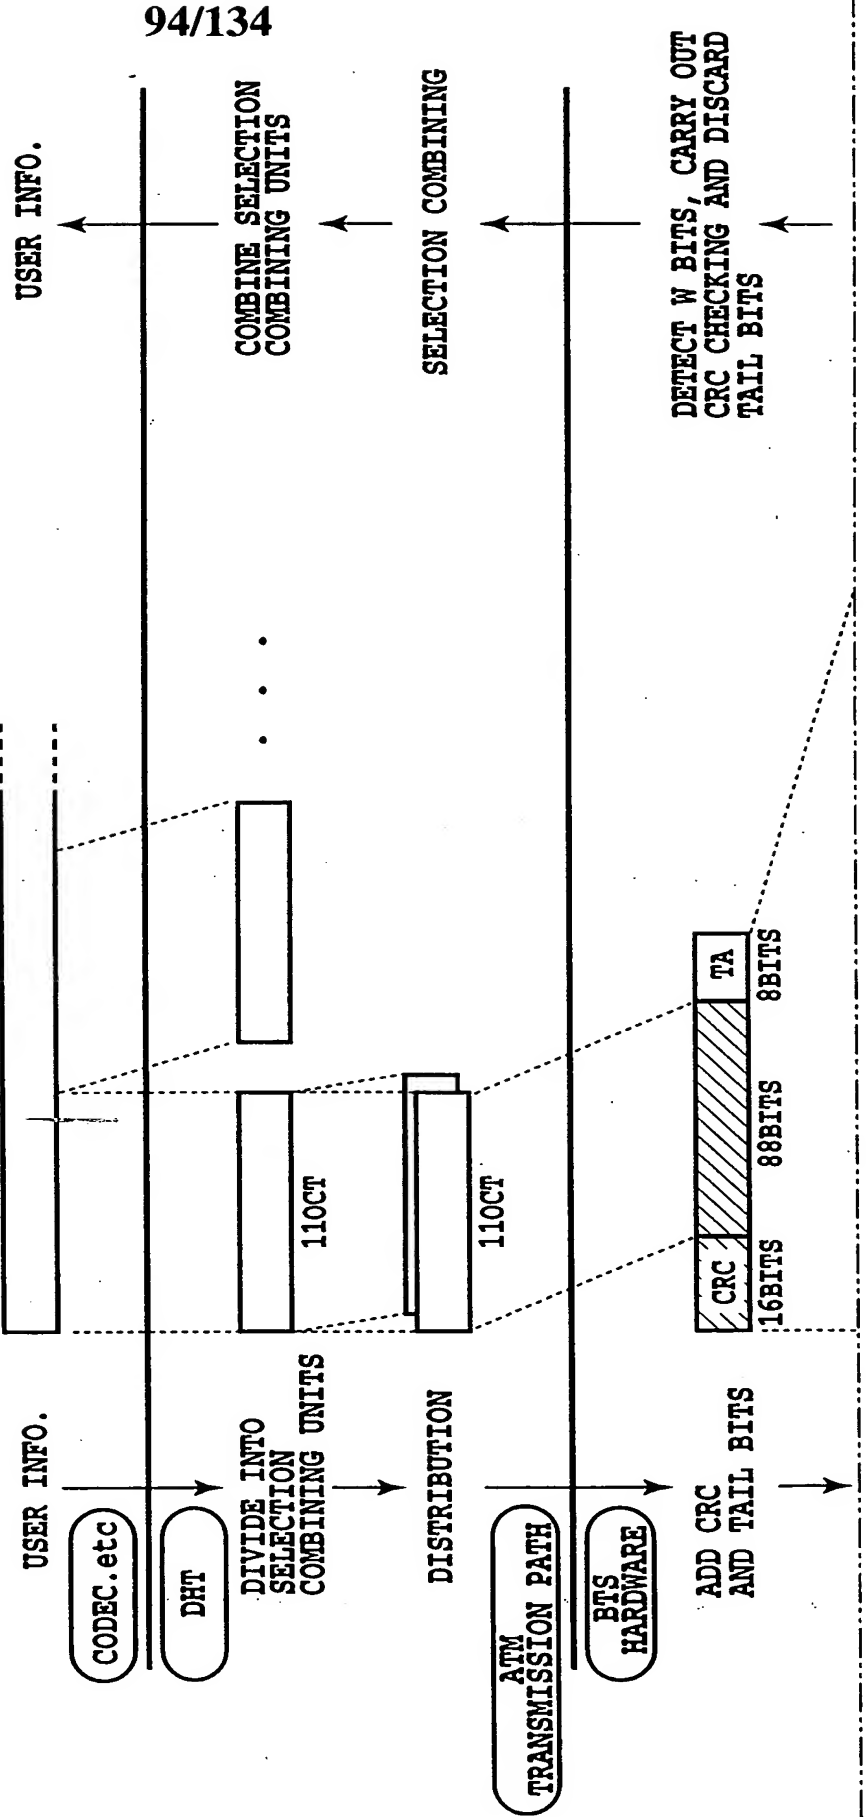

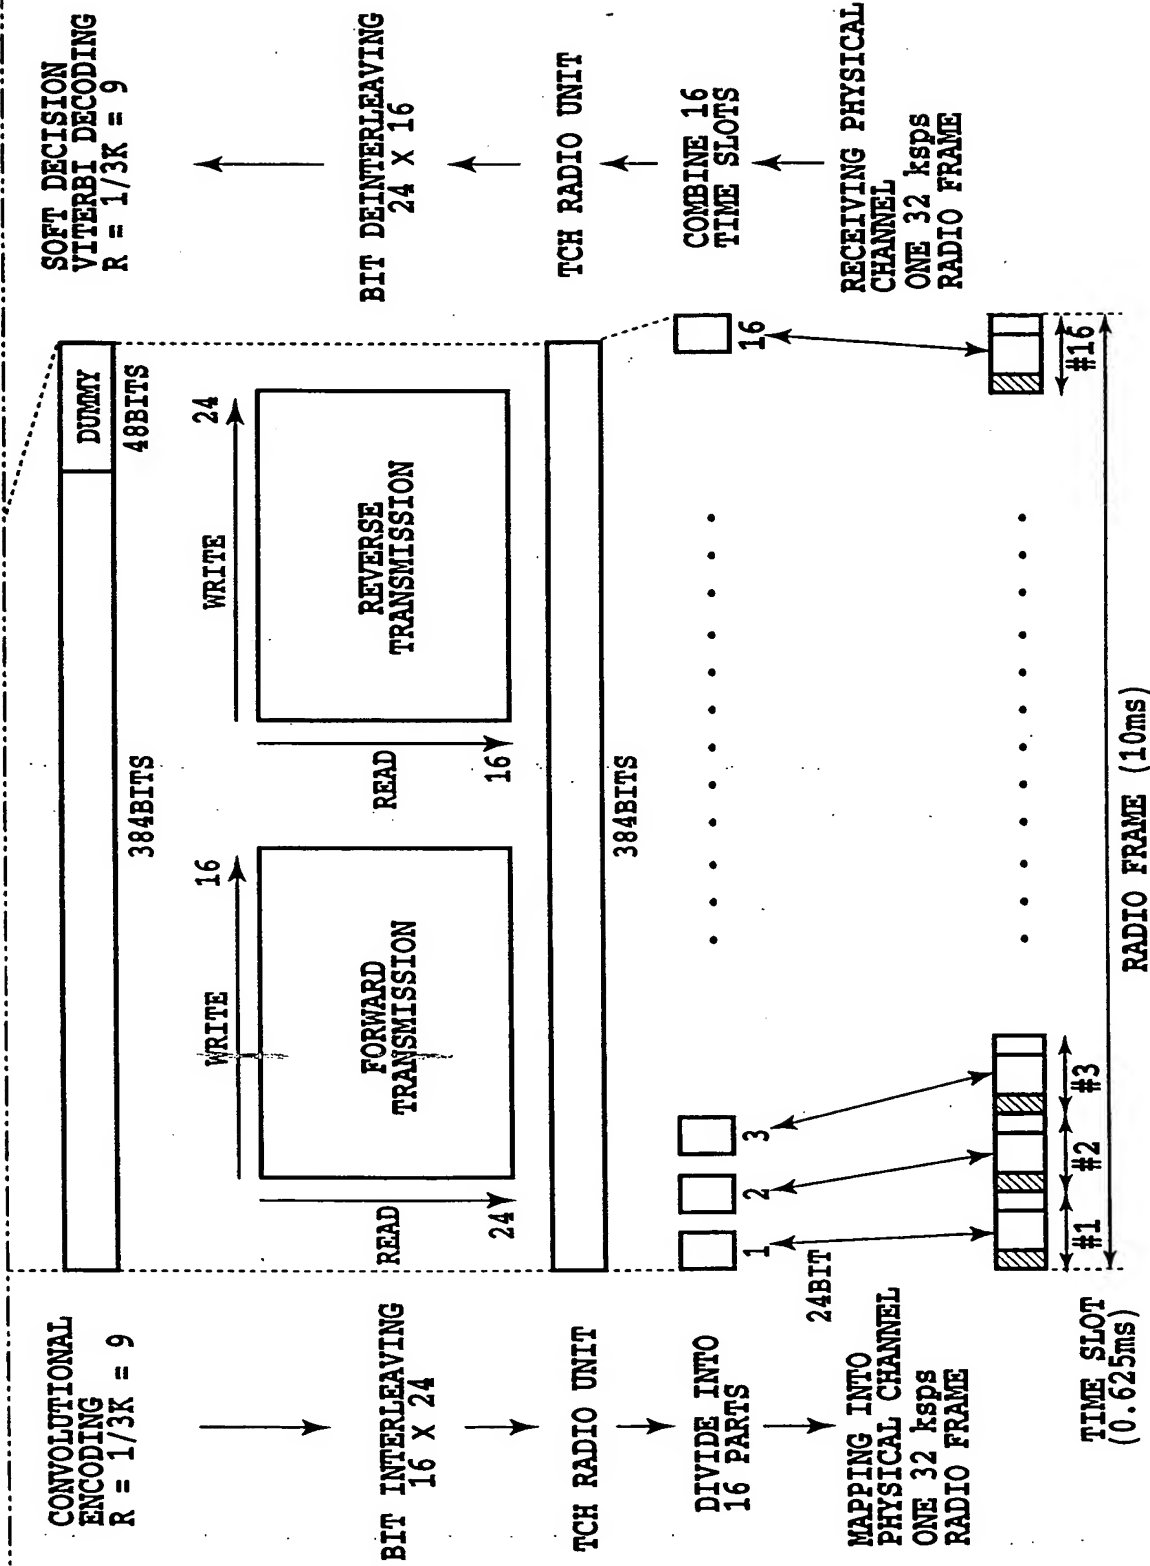



FIG.75B

FIG.76A

FIG.76

FIG.76A

FIG.76B

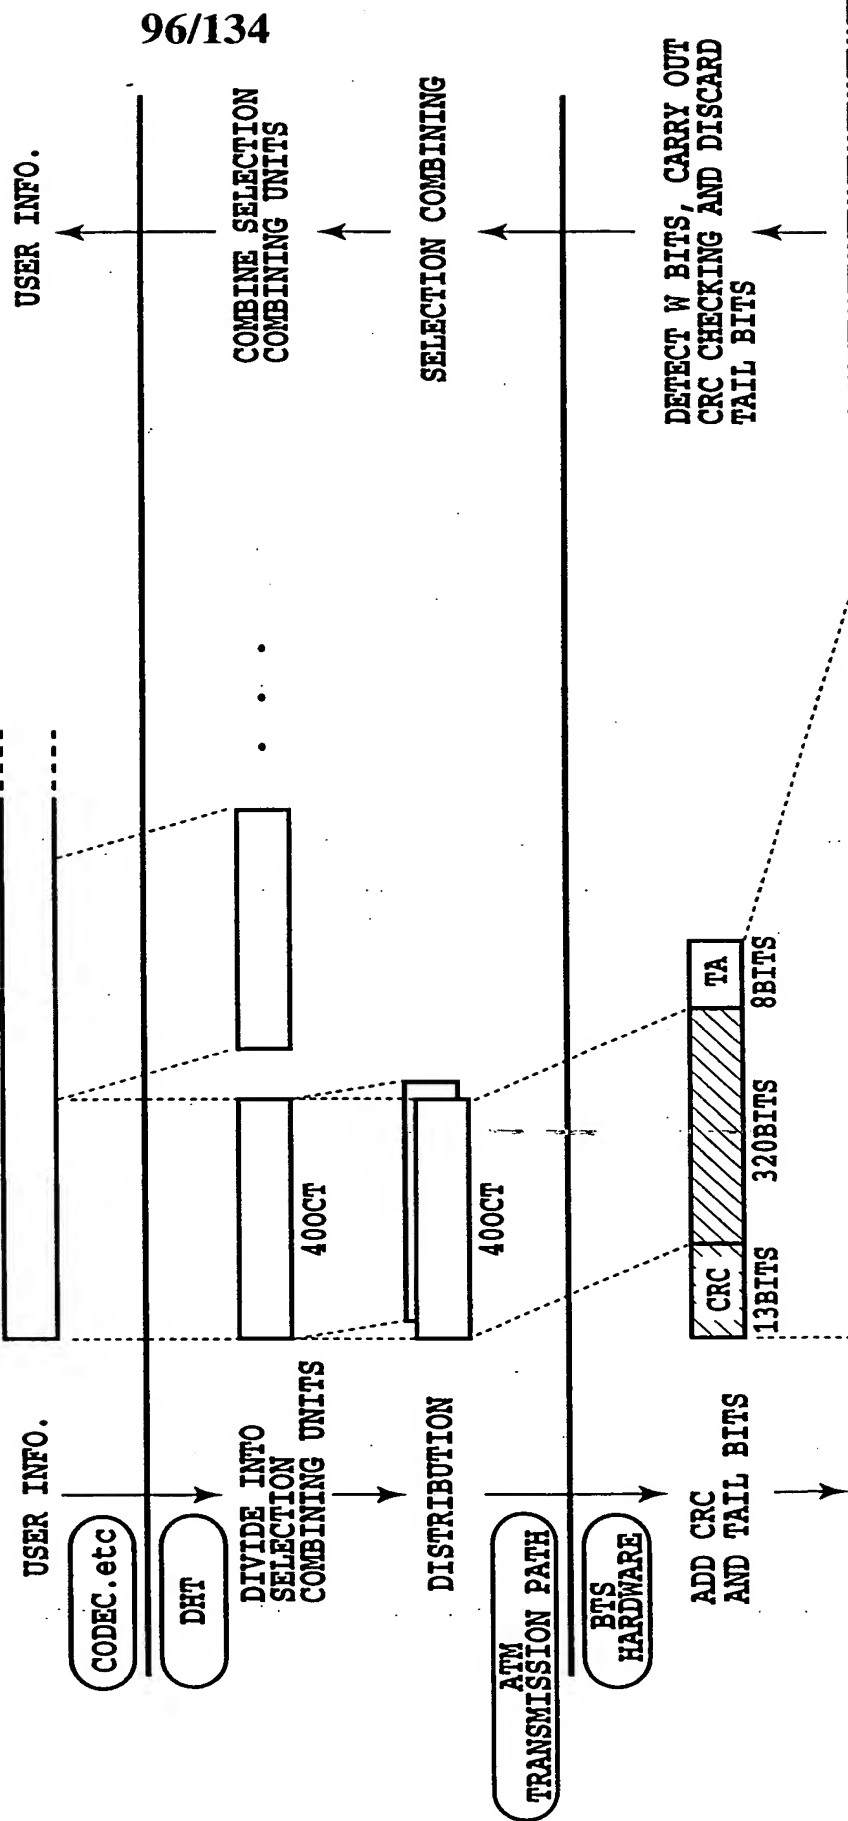

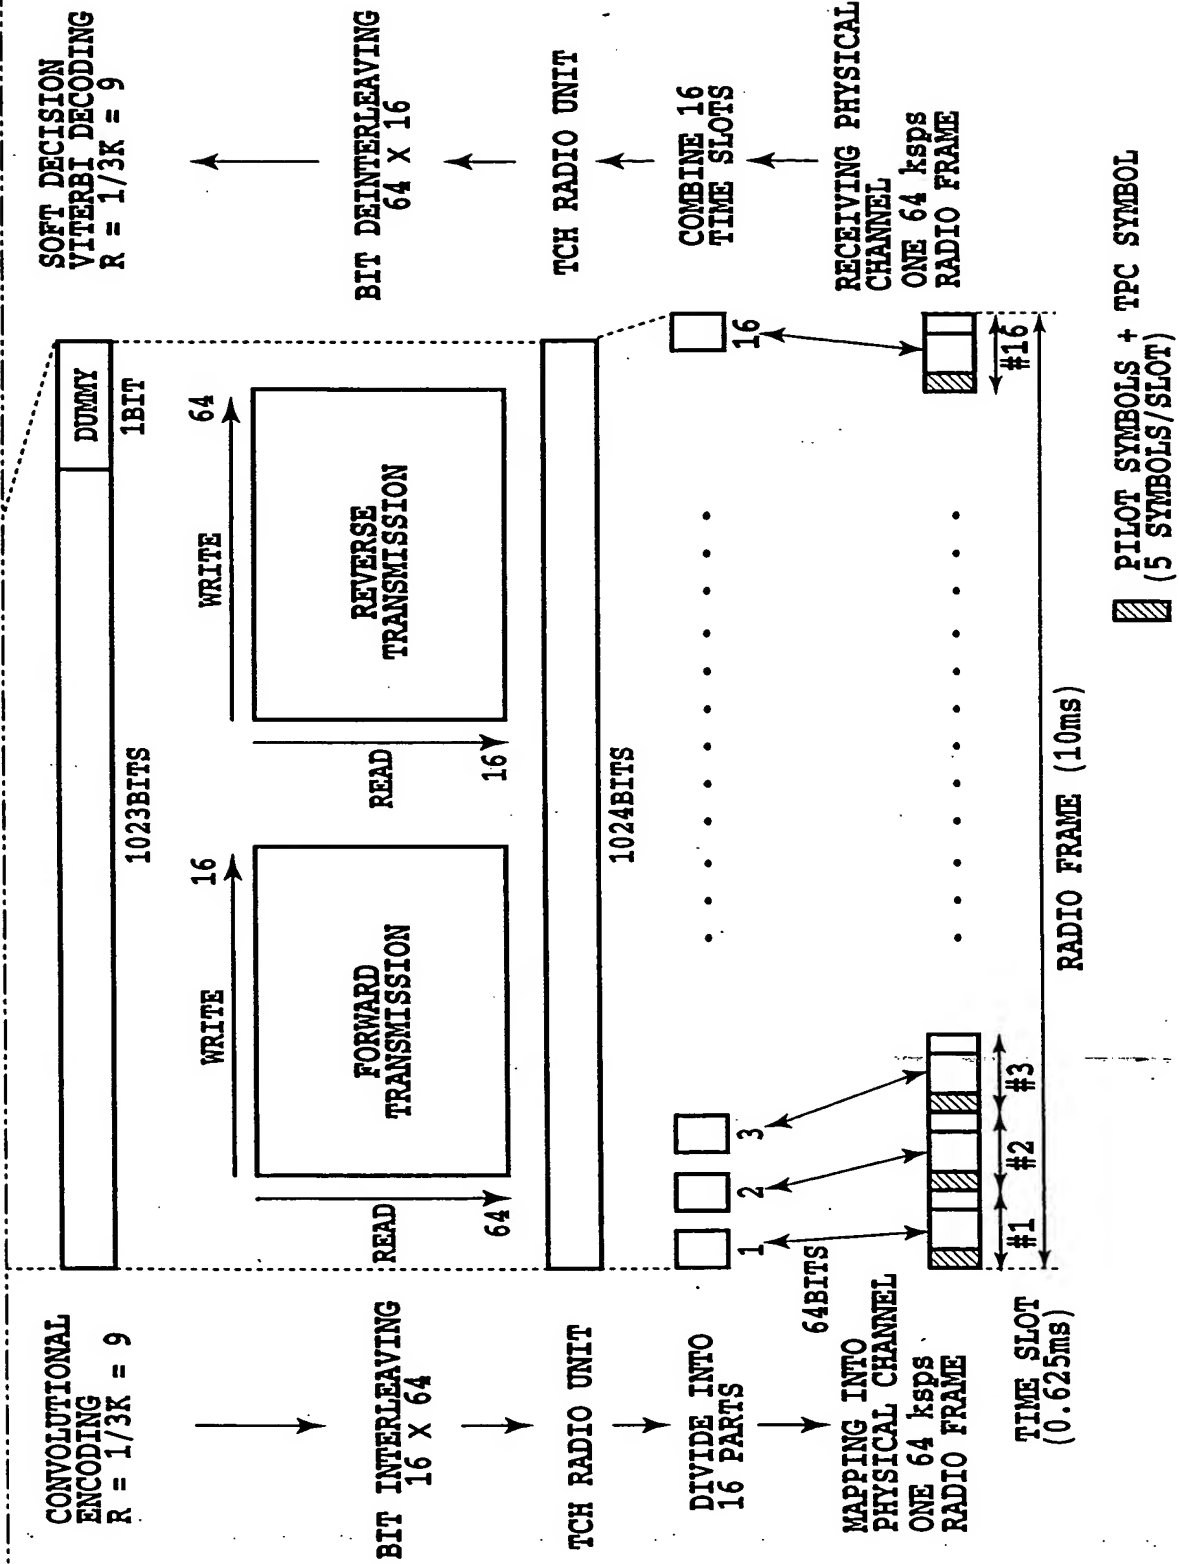
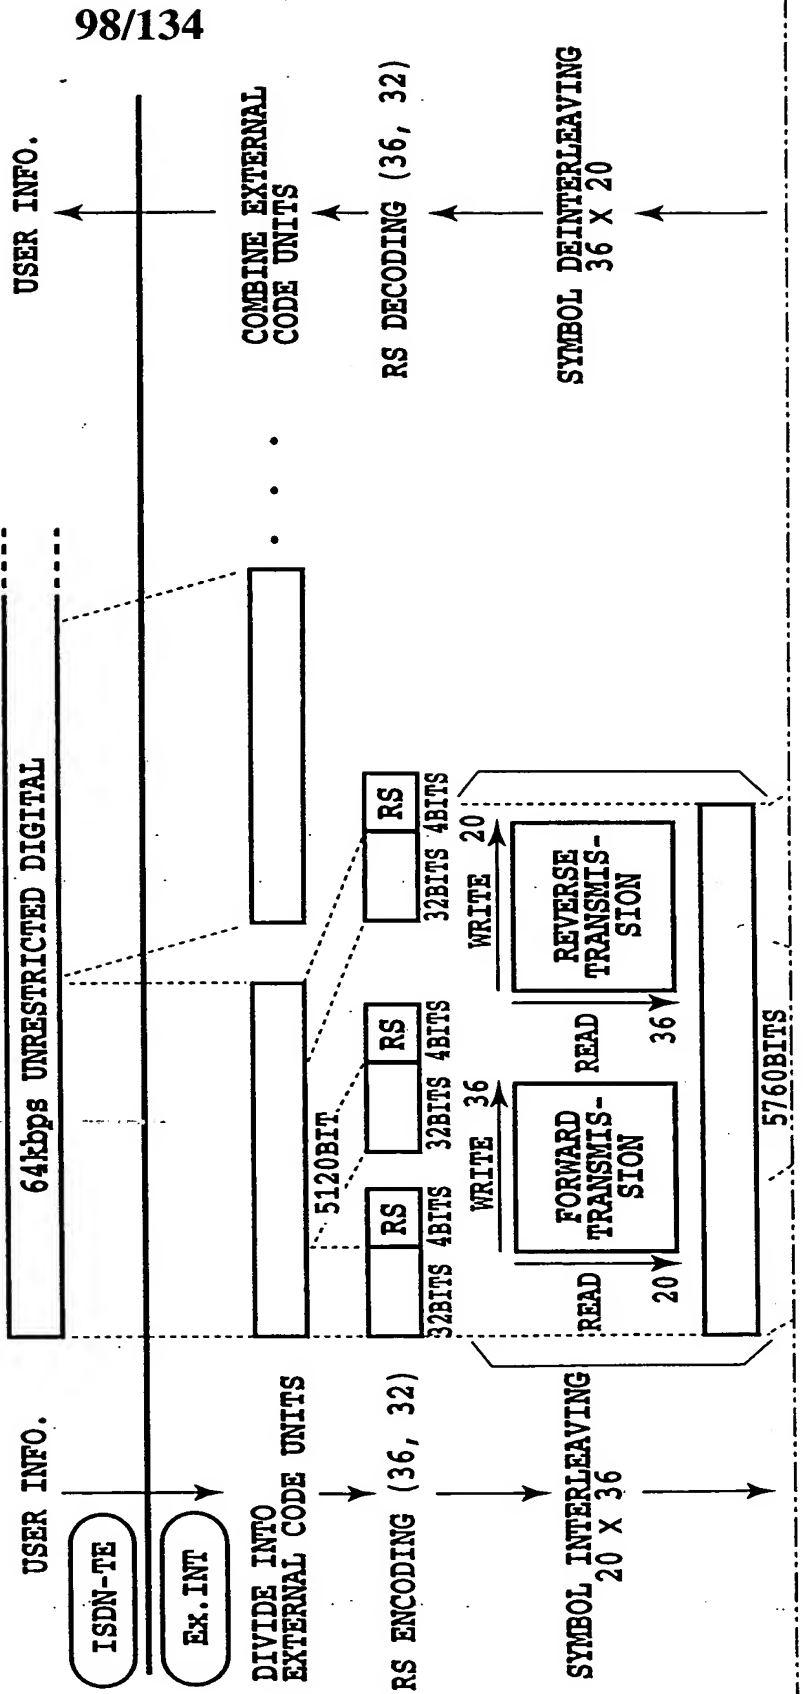


FIG.76B

FIG.77

FIG.77A
FIG.77B
FIG.77C

FIG.77A



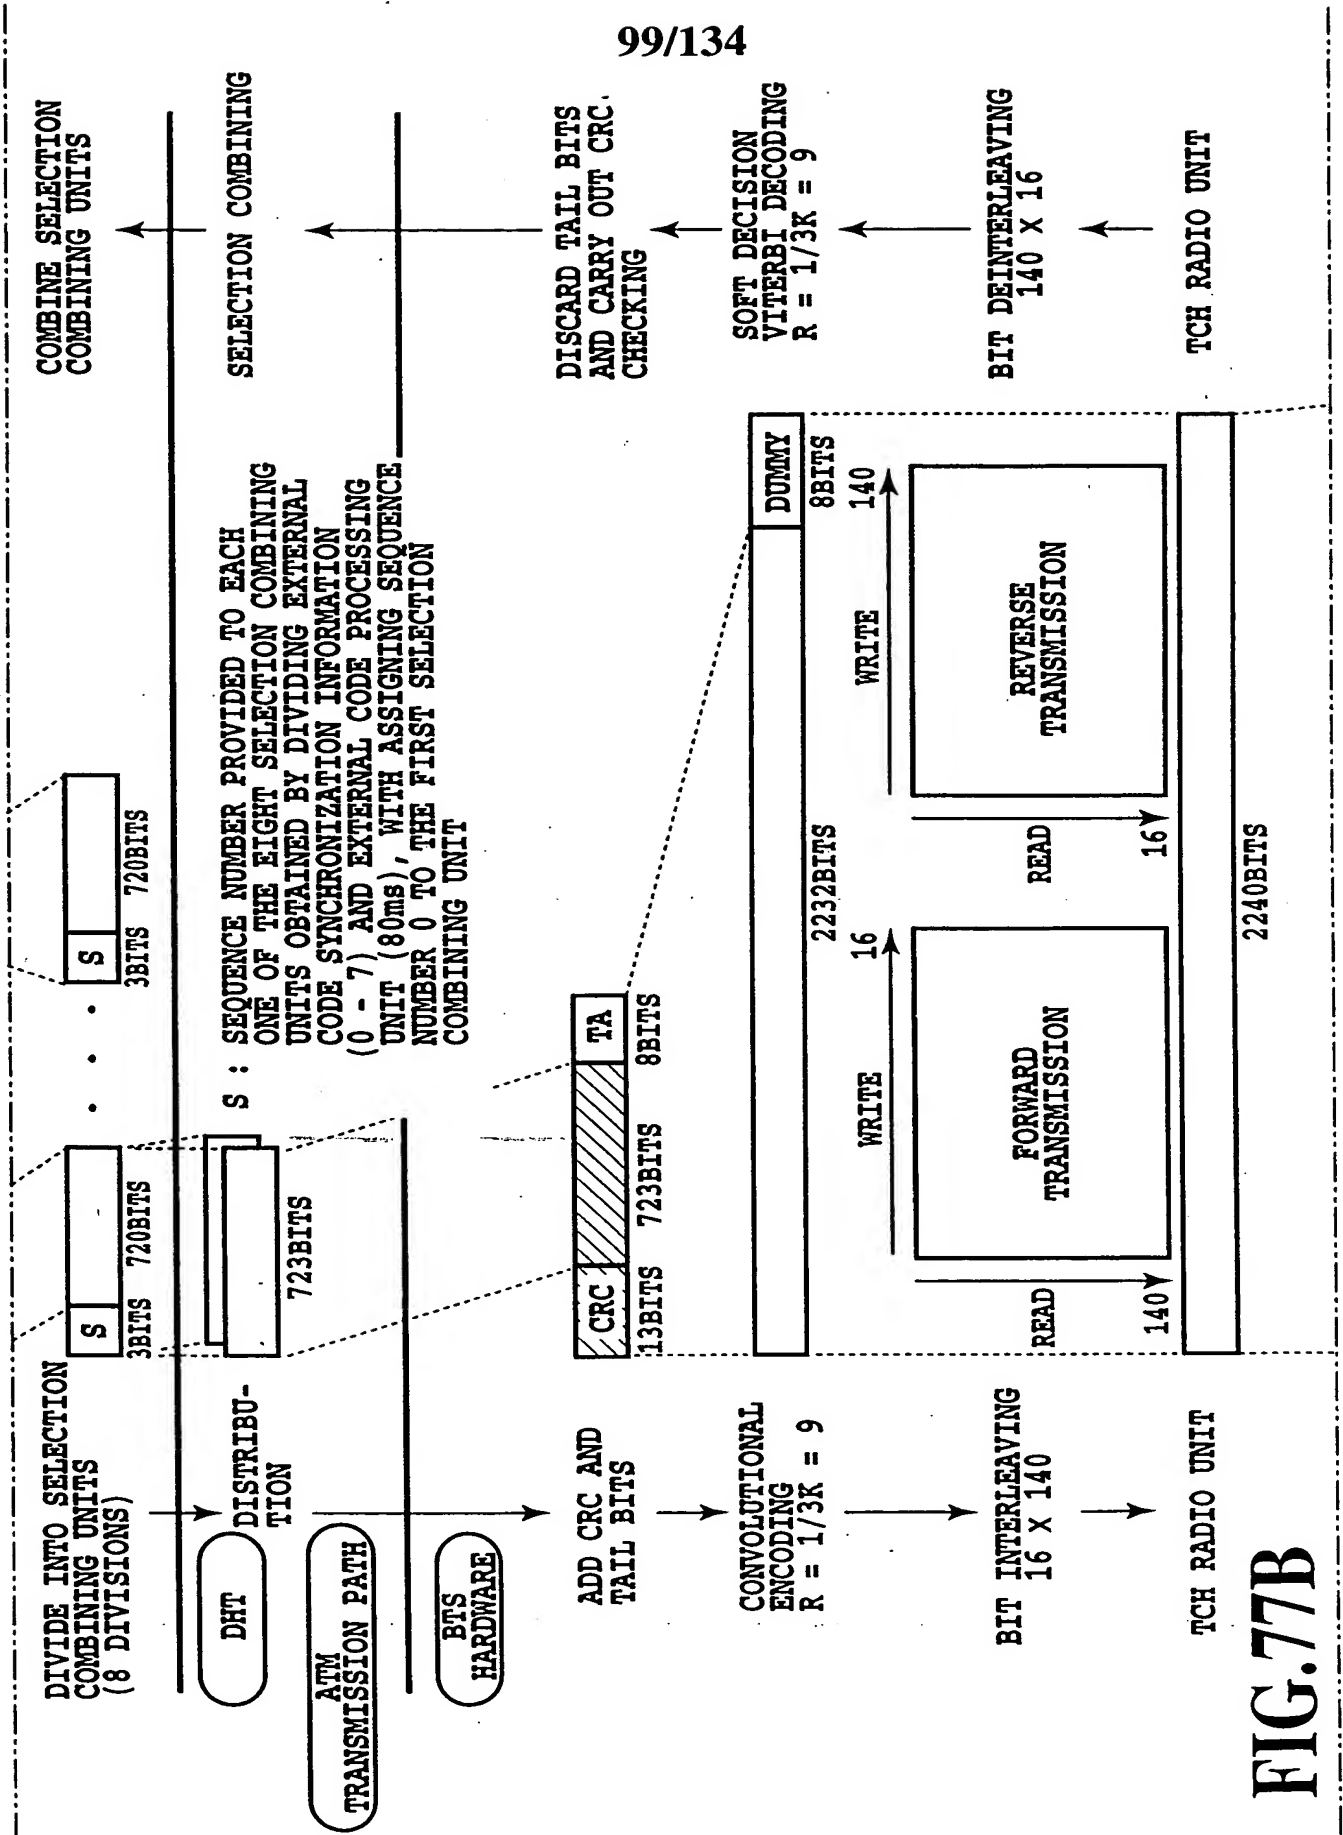


FIG. 77B

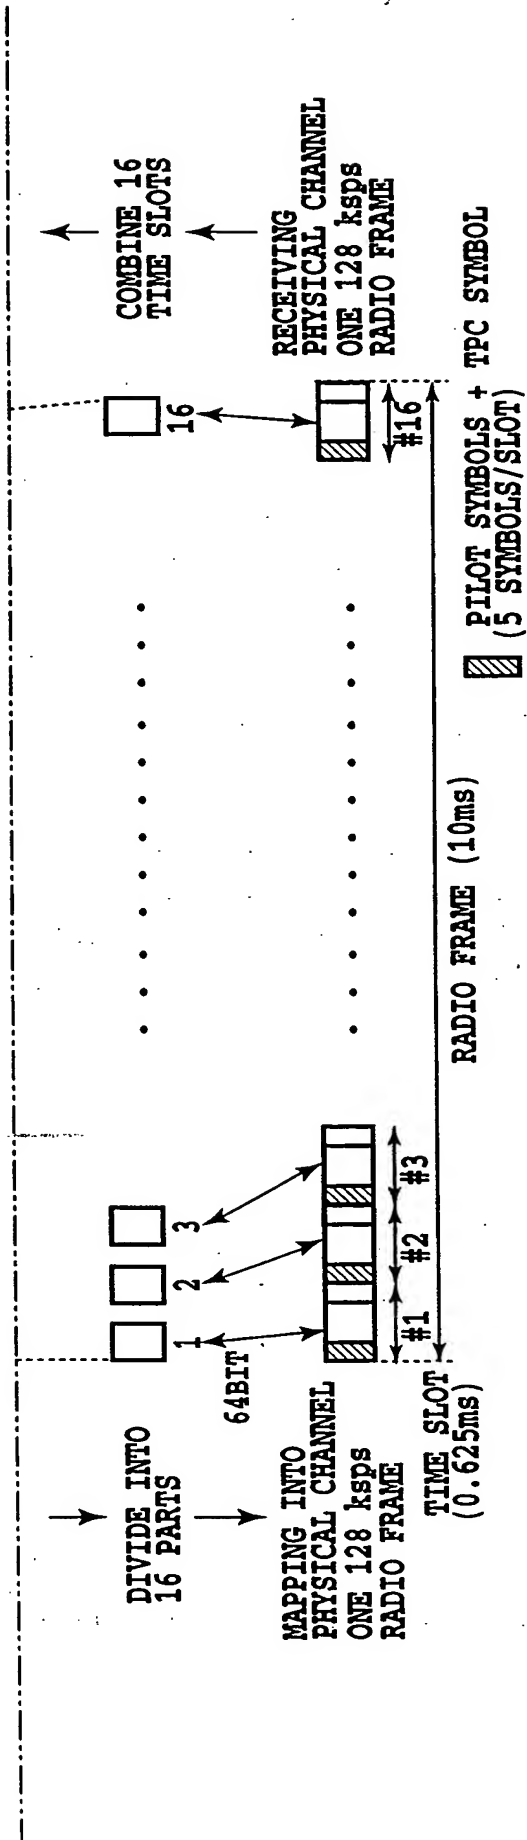
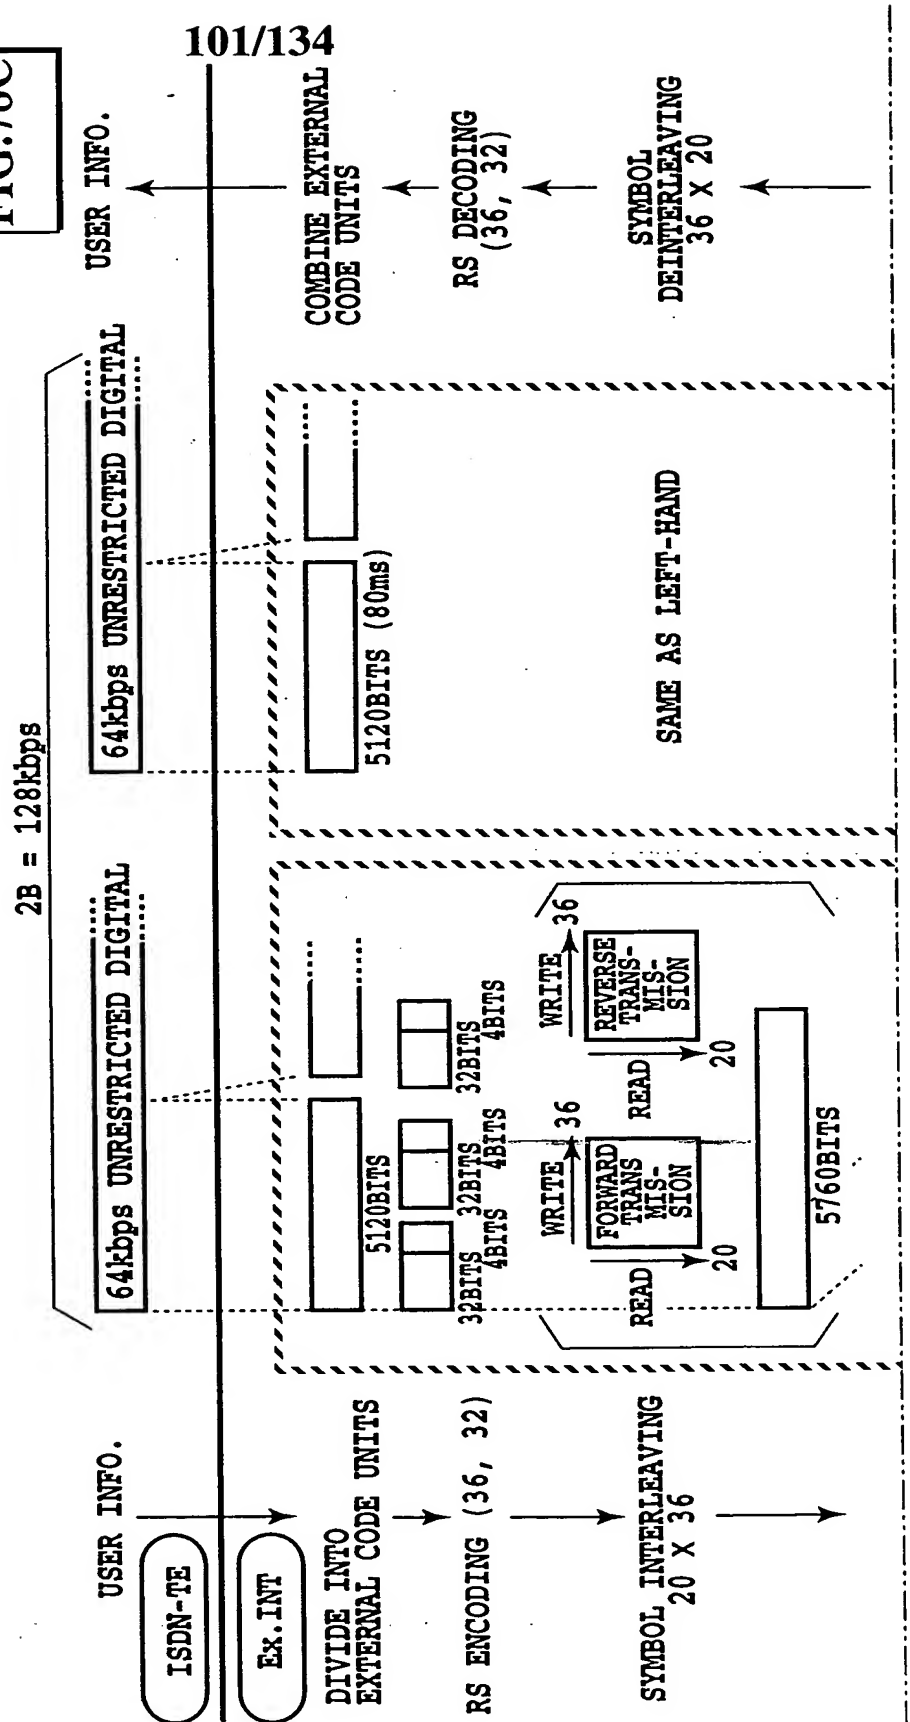


FIG.77C

FIG. 78

FIG. 78B

FIG. 78C



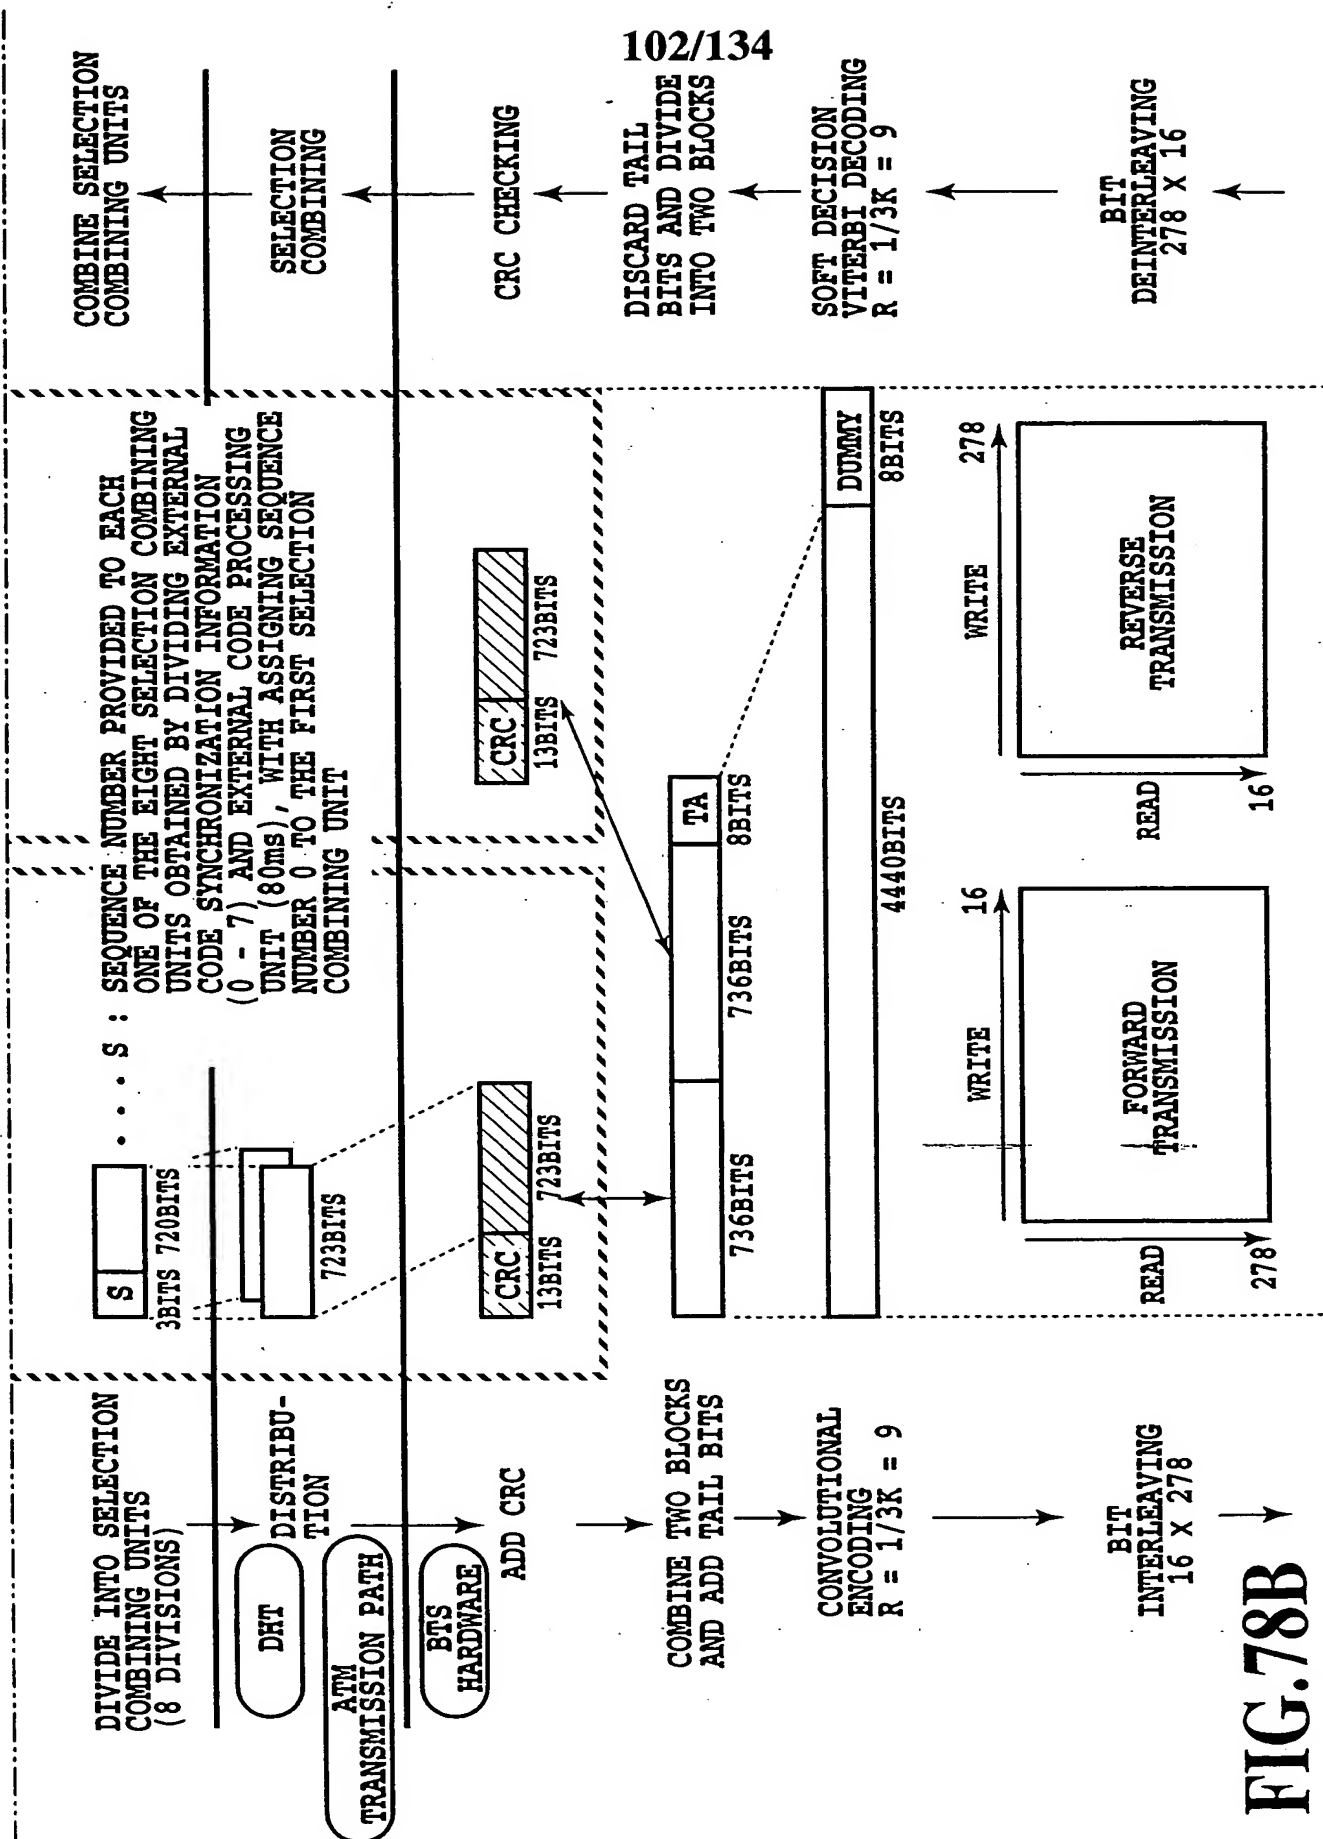


FIG. 78B

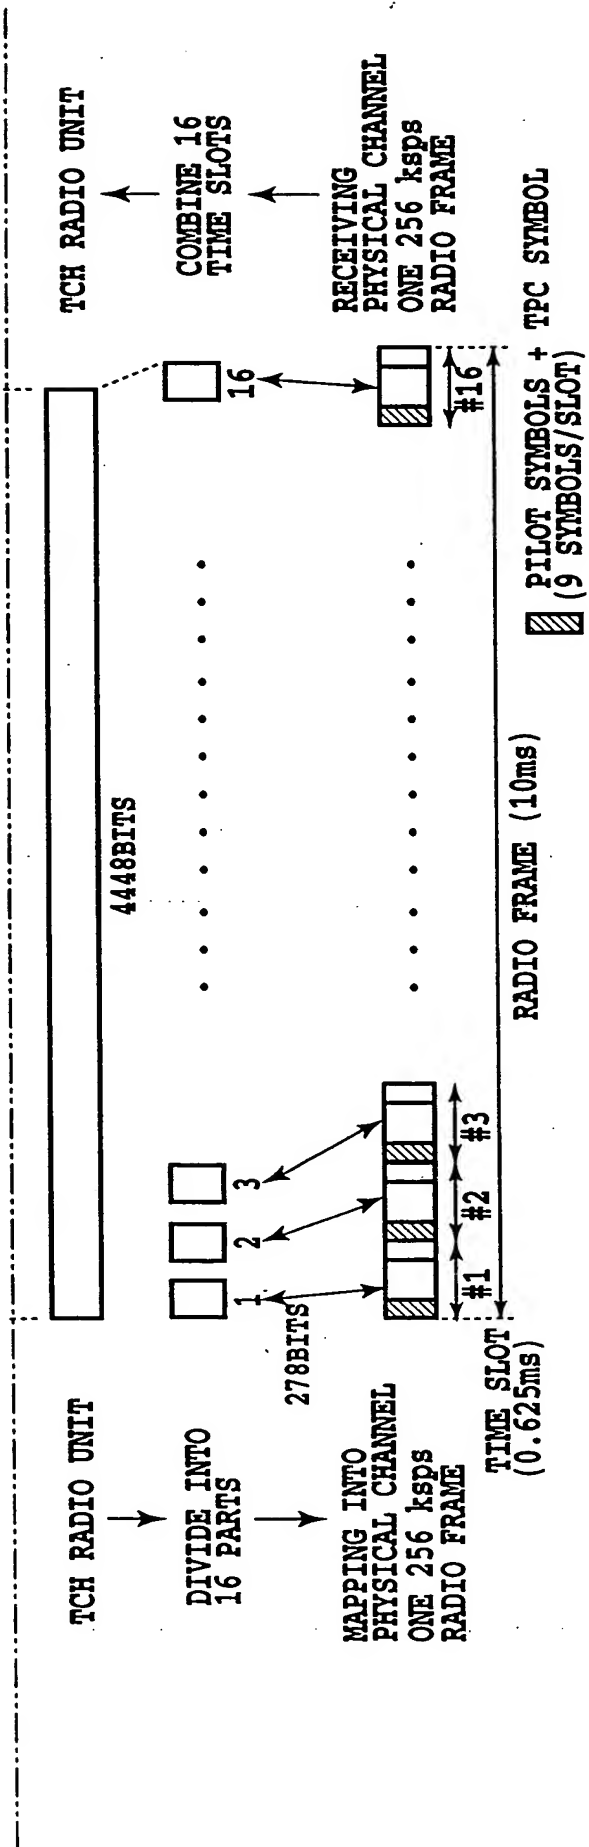


FIG.78C

FIG.79A


FIG.79

FIG.79A

FIG.79B

FIG.79C

4B = 256kbps

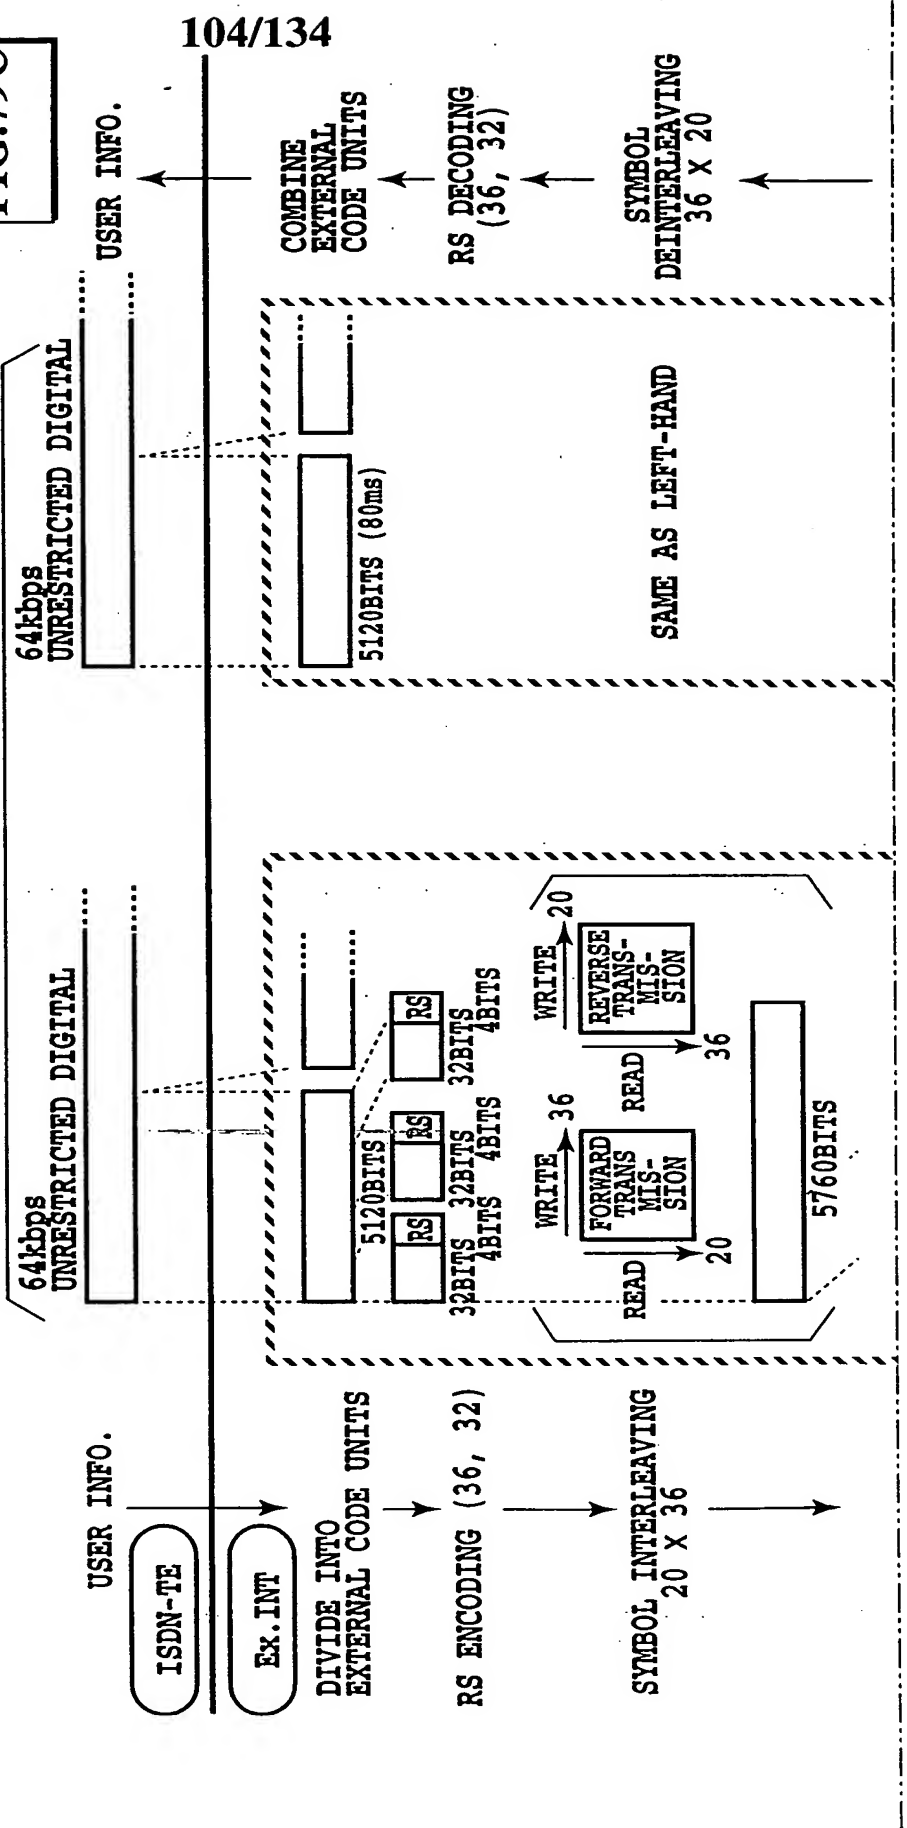

105/134

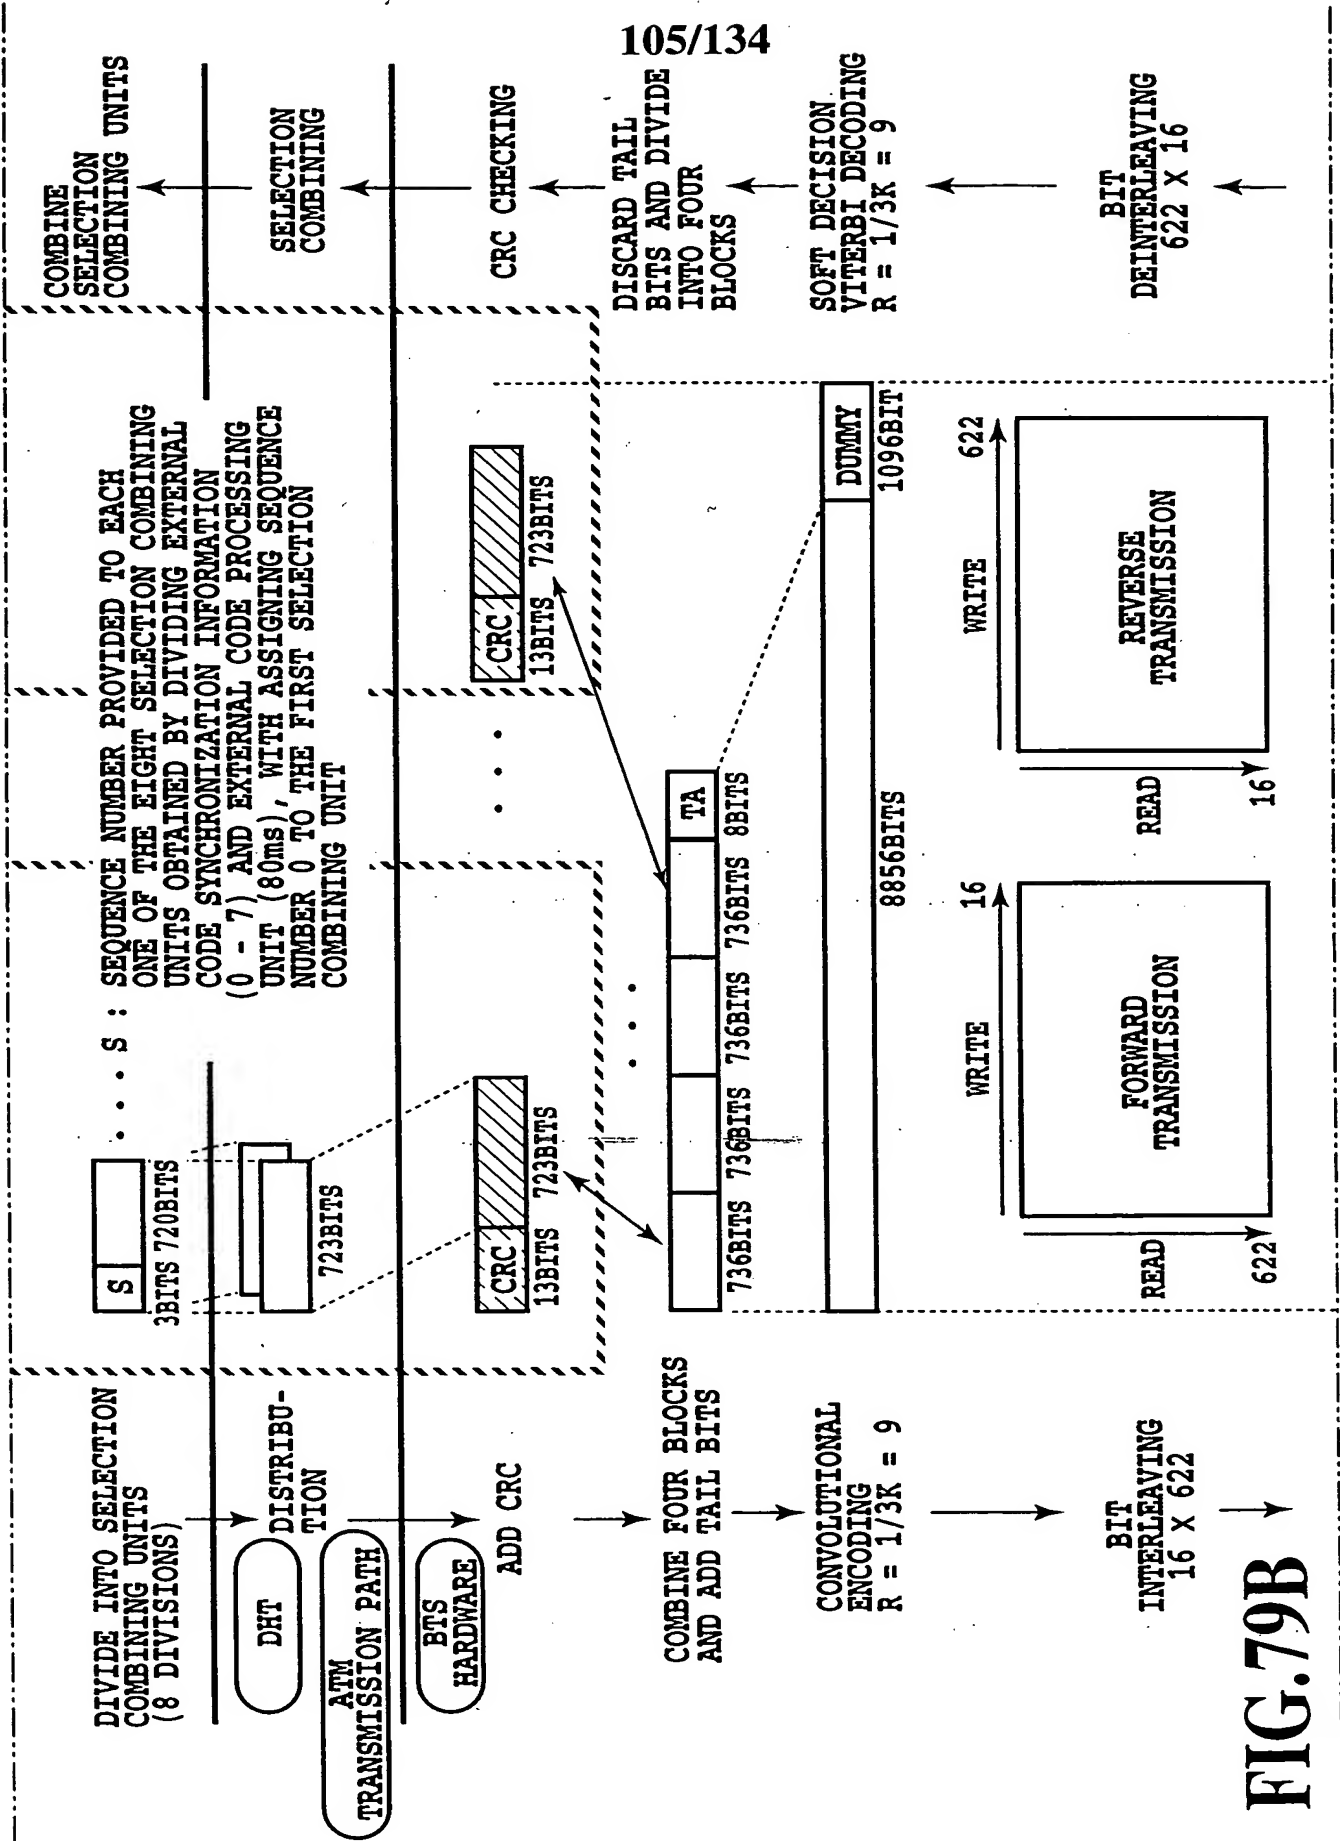


FIG. 79B

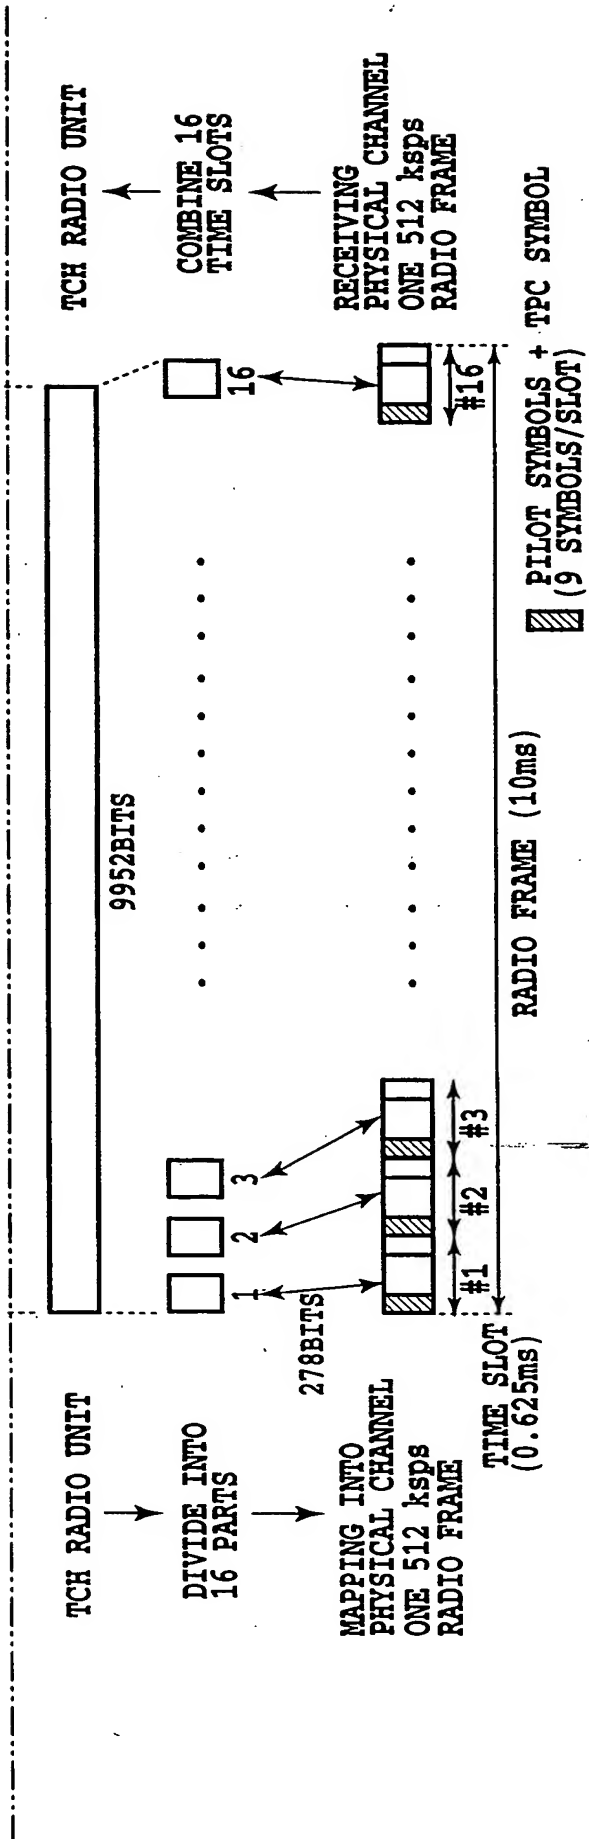


FIG.79C

FIG.80


FIG.80A


FIG.80B

FIG.80C

FIG.80A

6B = 384kbps

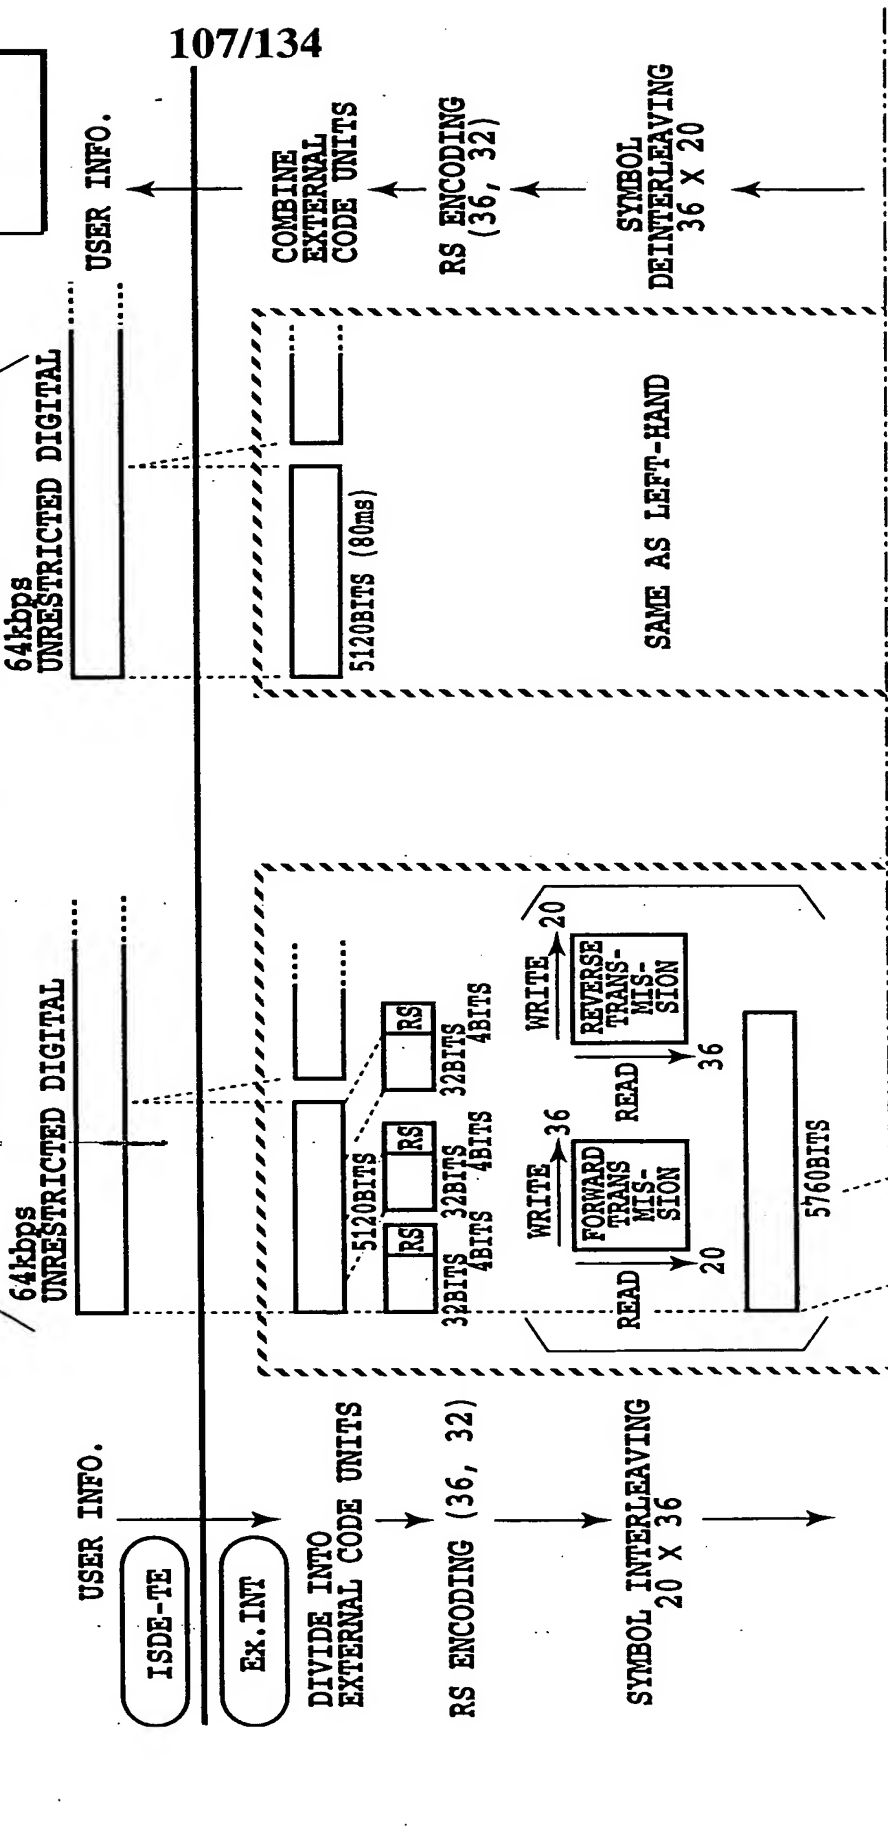

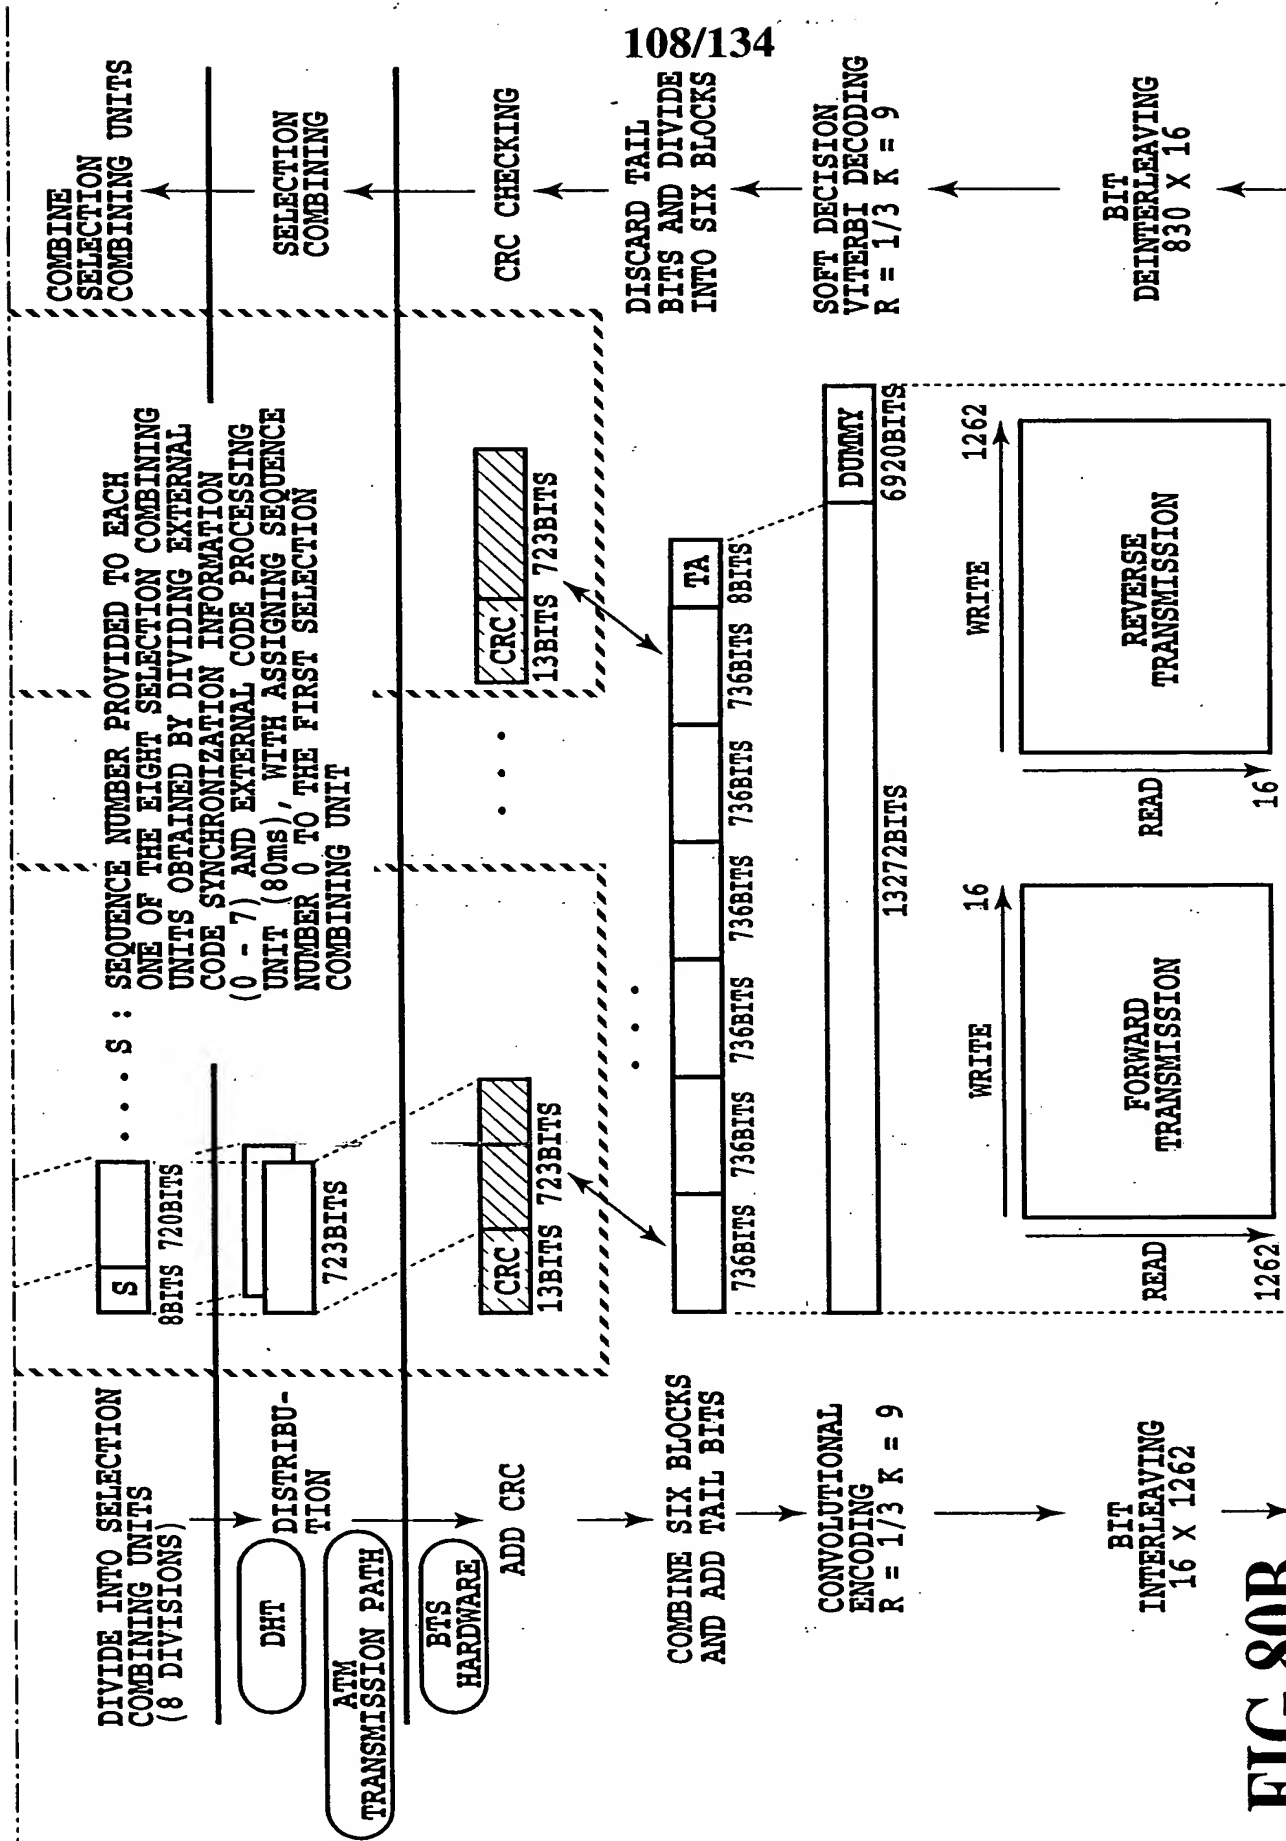

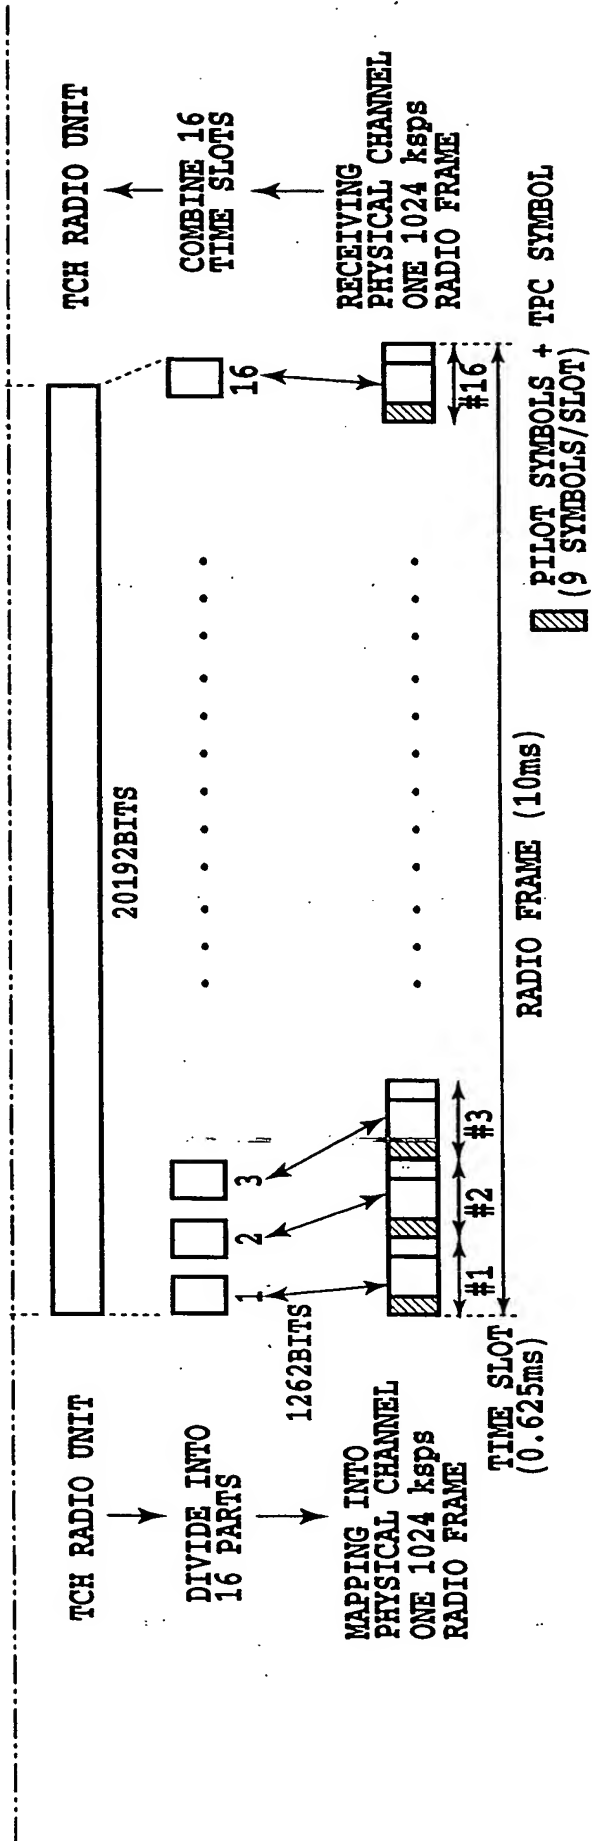


FIG.80C


FIG.81

FIG.81A

FIG.81A

FIG.81B

110/134

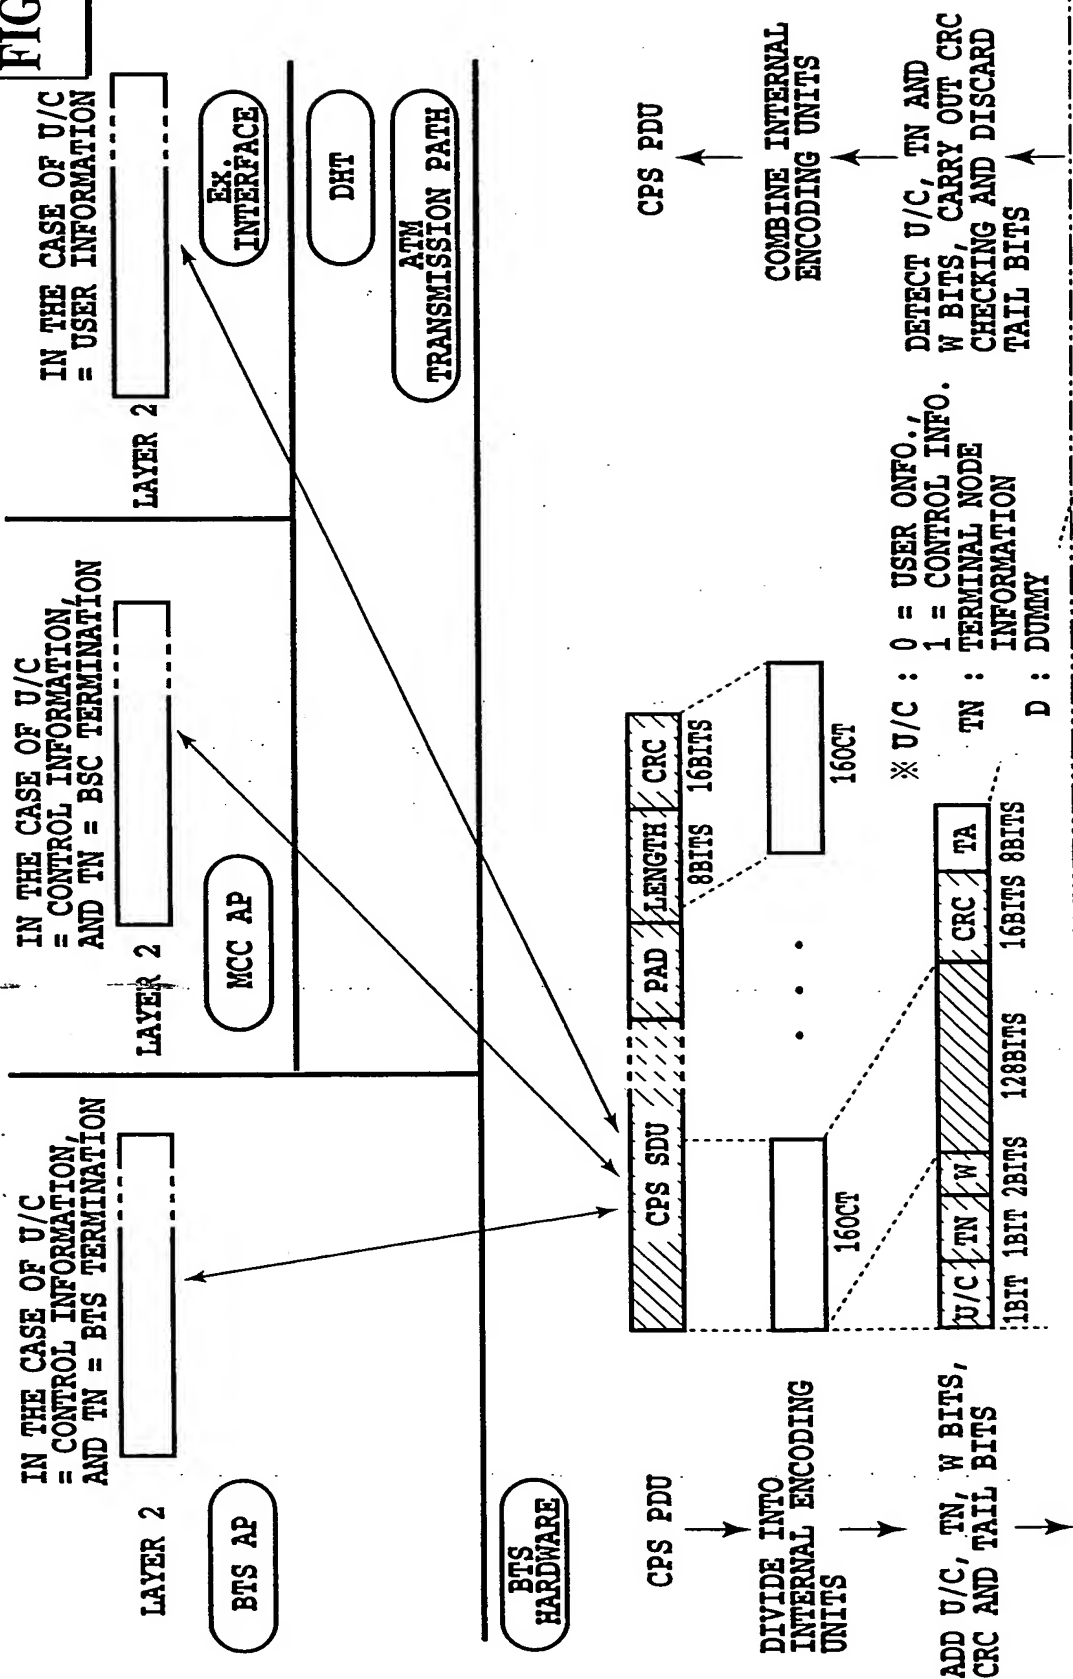

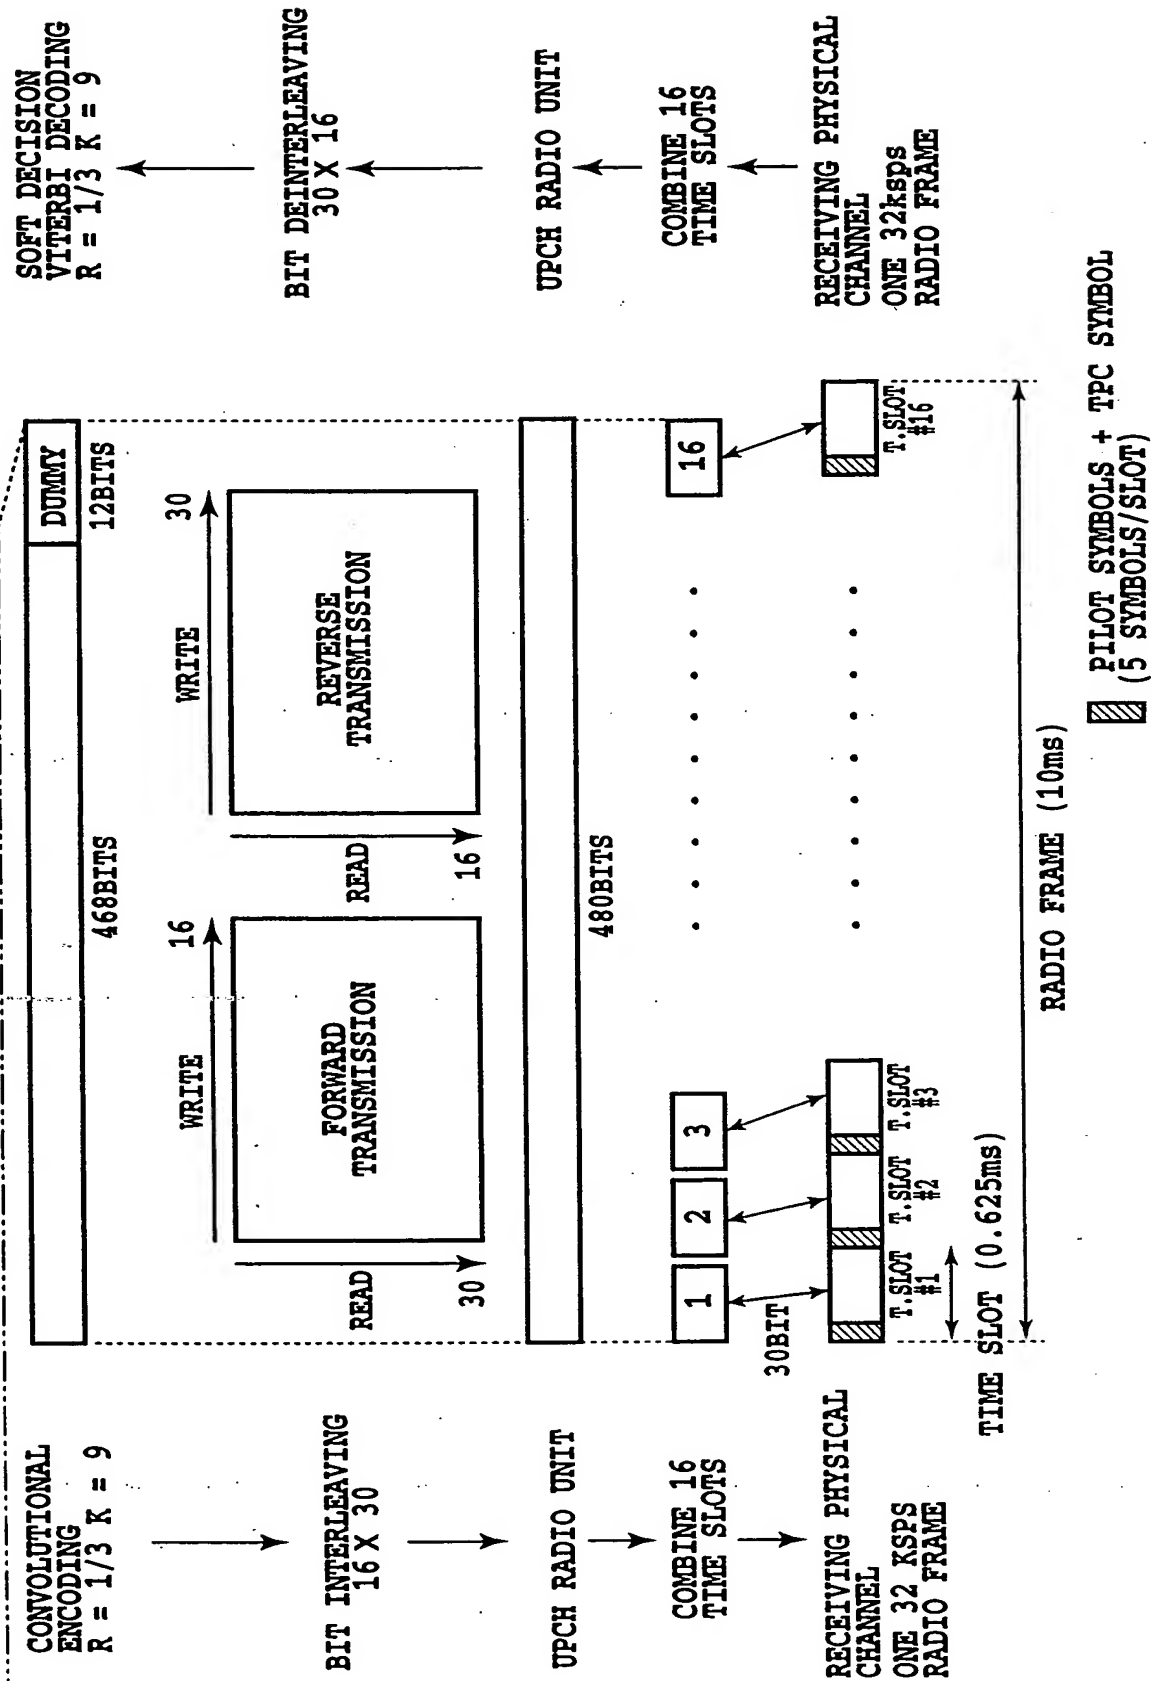



FIG.81B

FIG.82

FIG.82A

FIG.82B

112/134

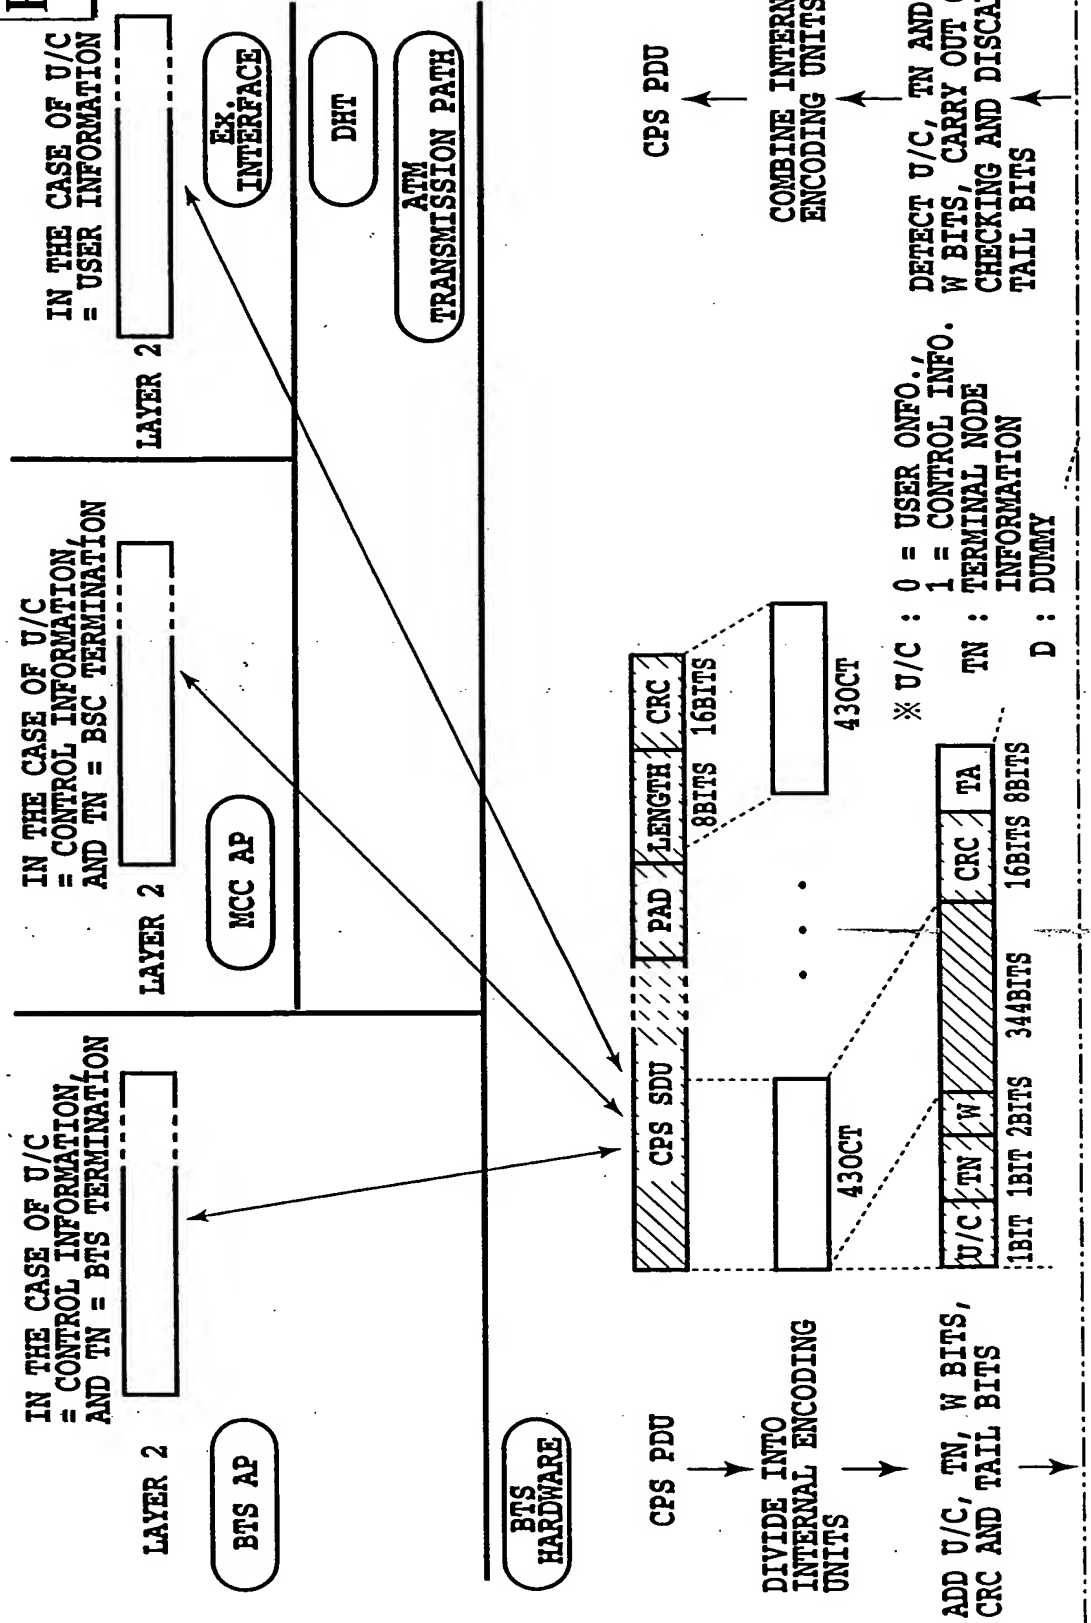

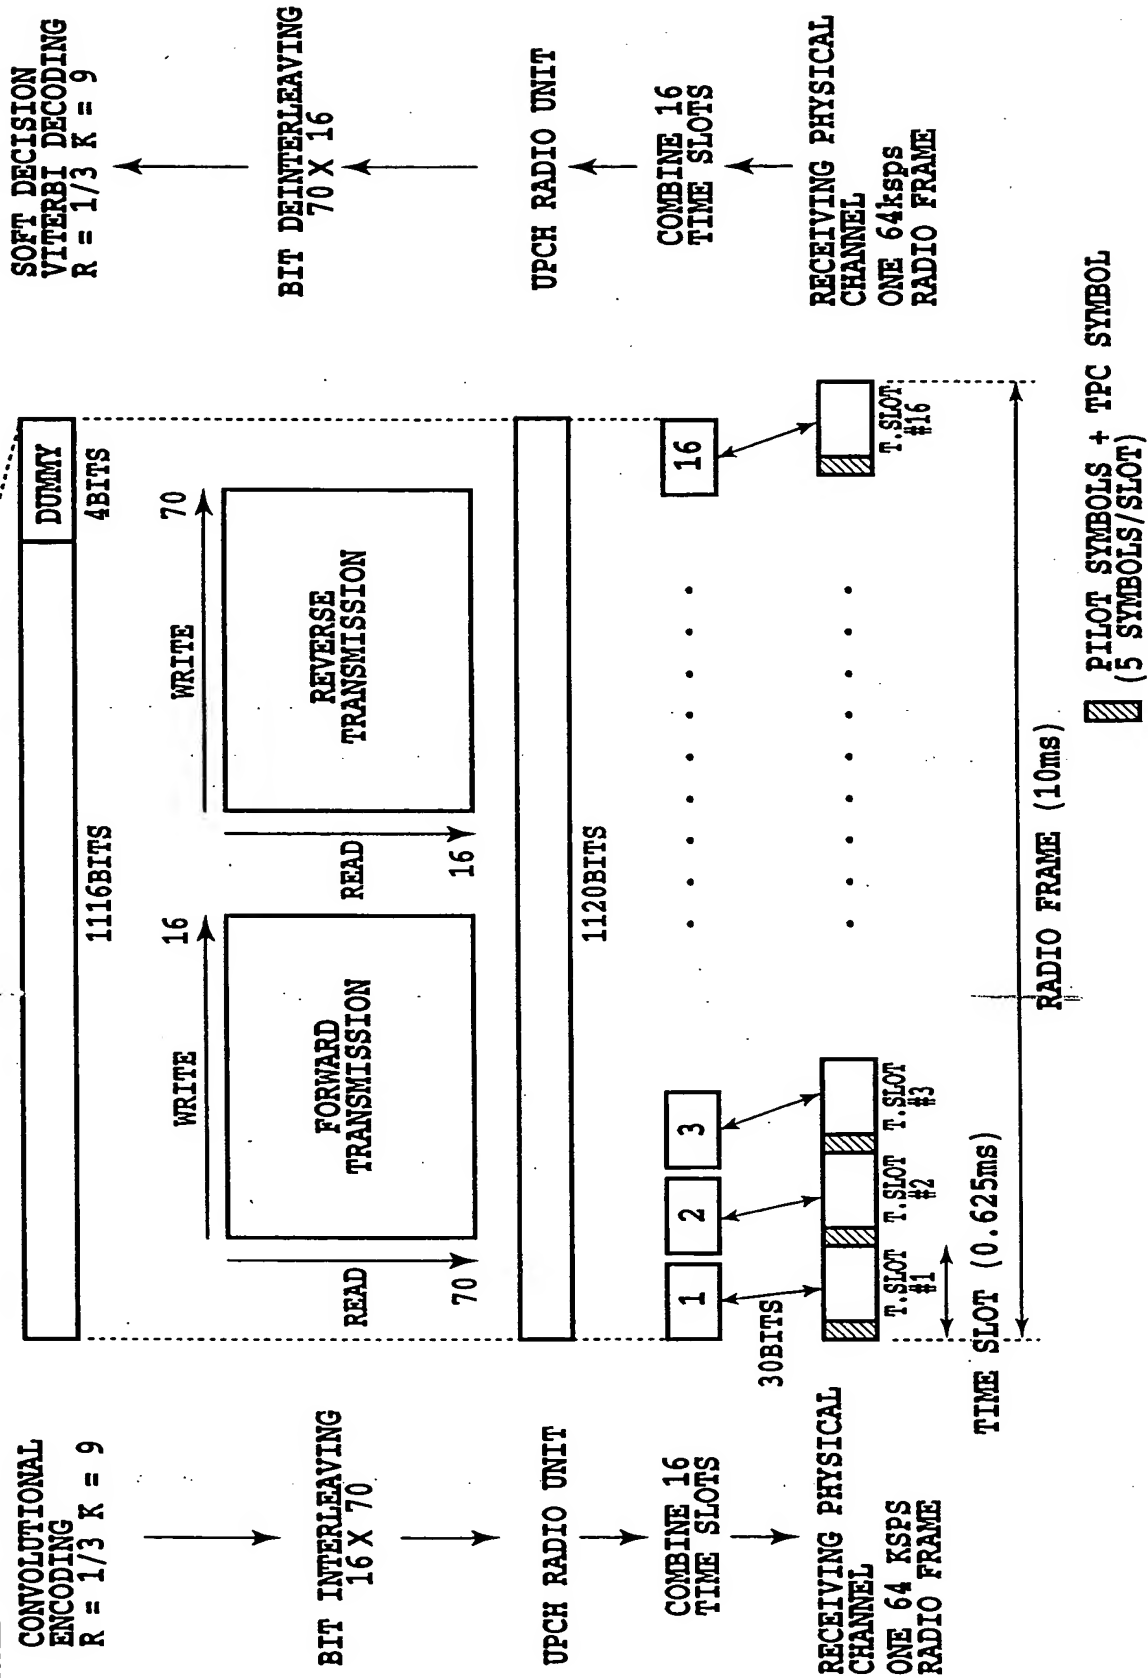



FIG.82B

FIG.83

FIG.83A

FIG.83A

FIG.83B

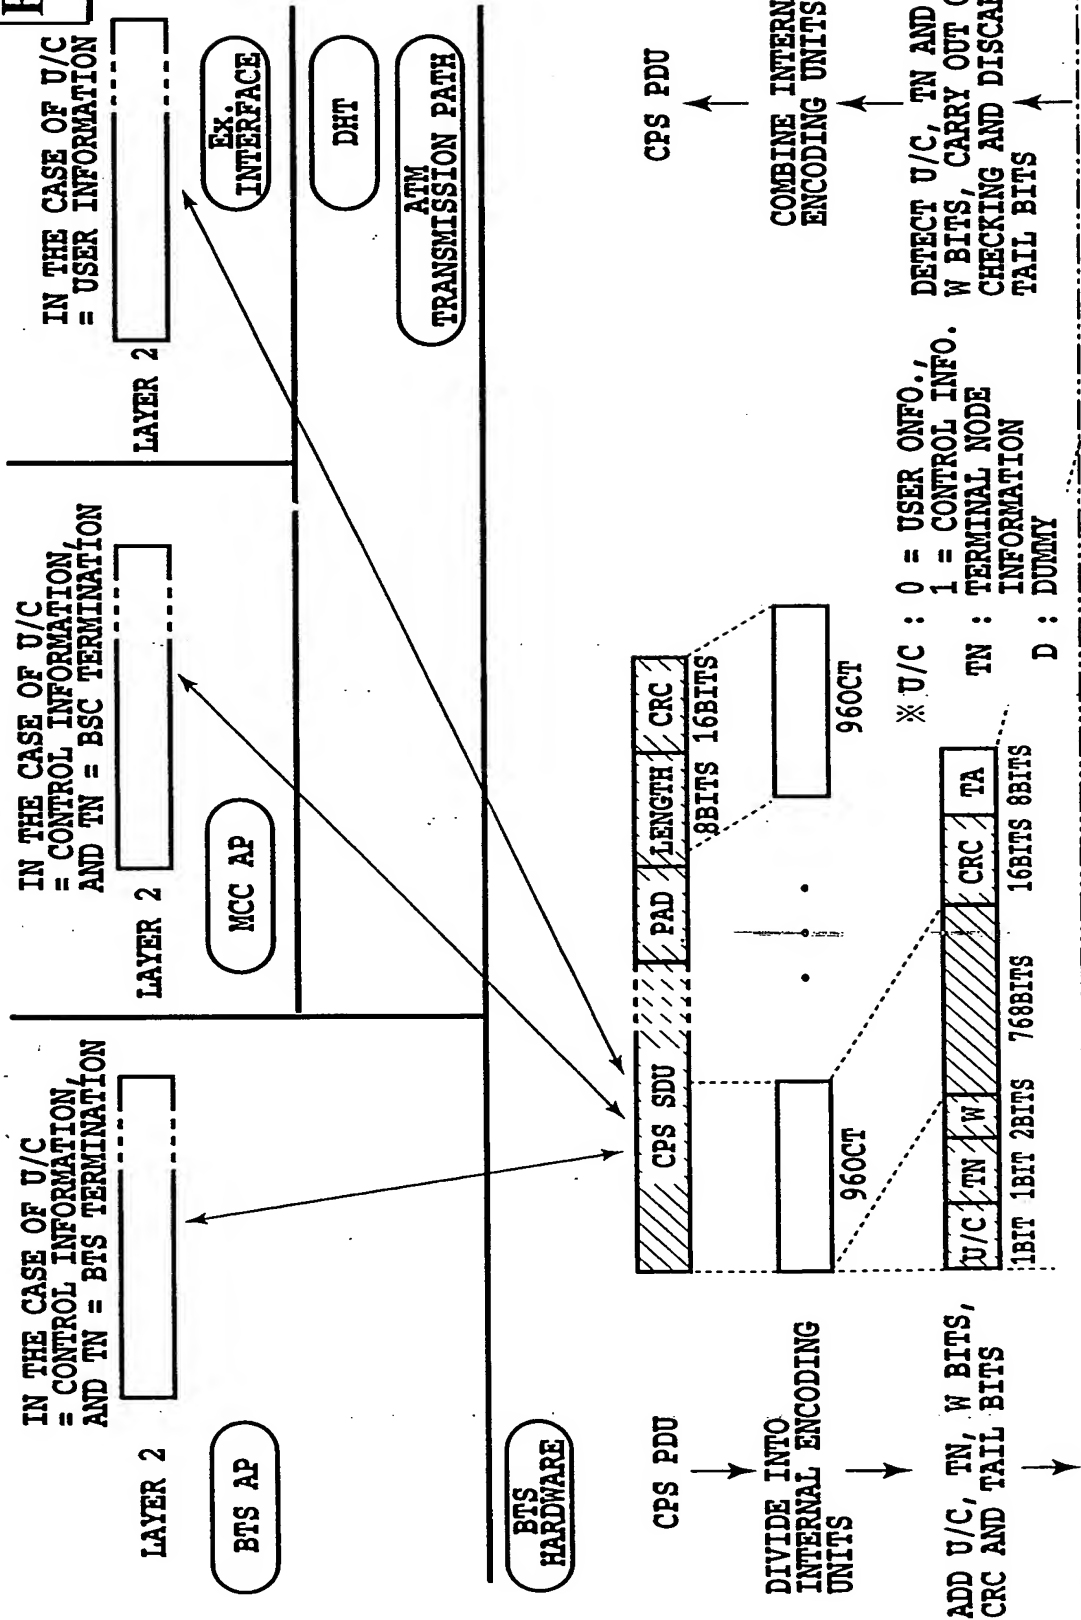

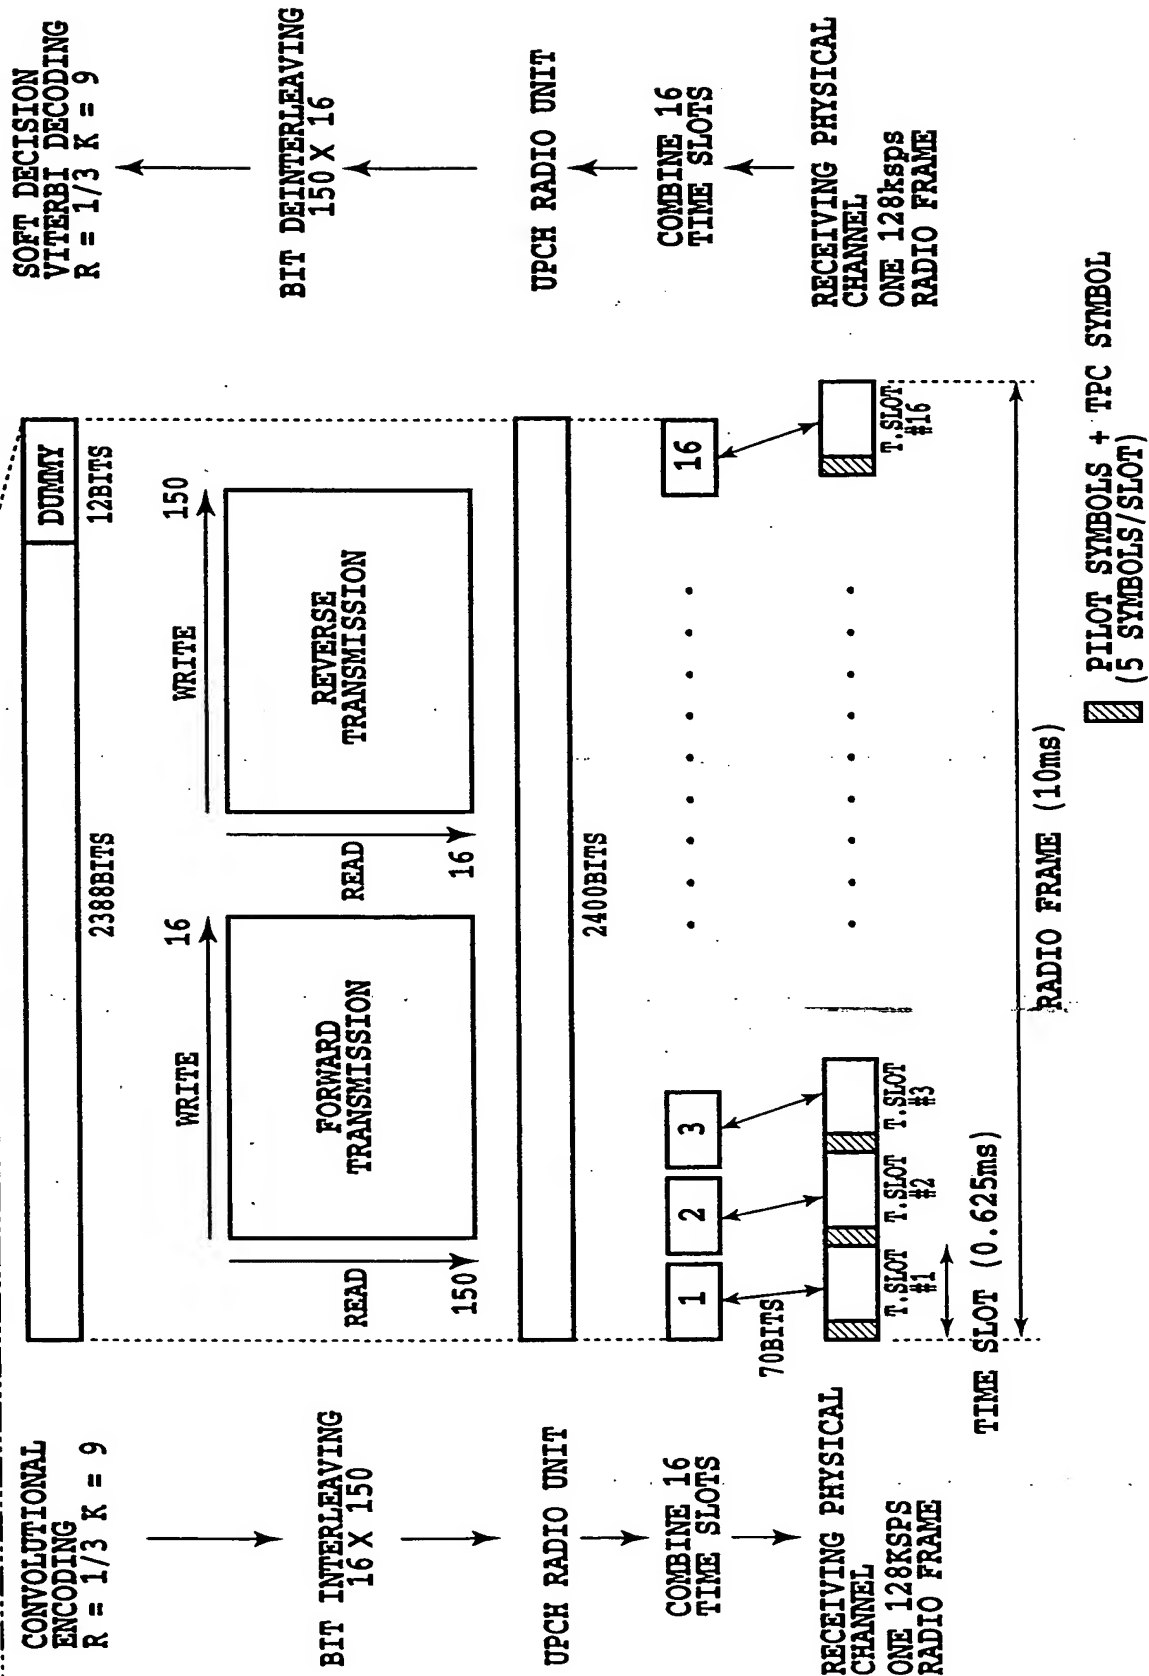


FIG.83B


FIG.84

FIG.84A

FIG.84B

116/134

FIG.84A

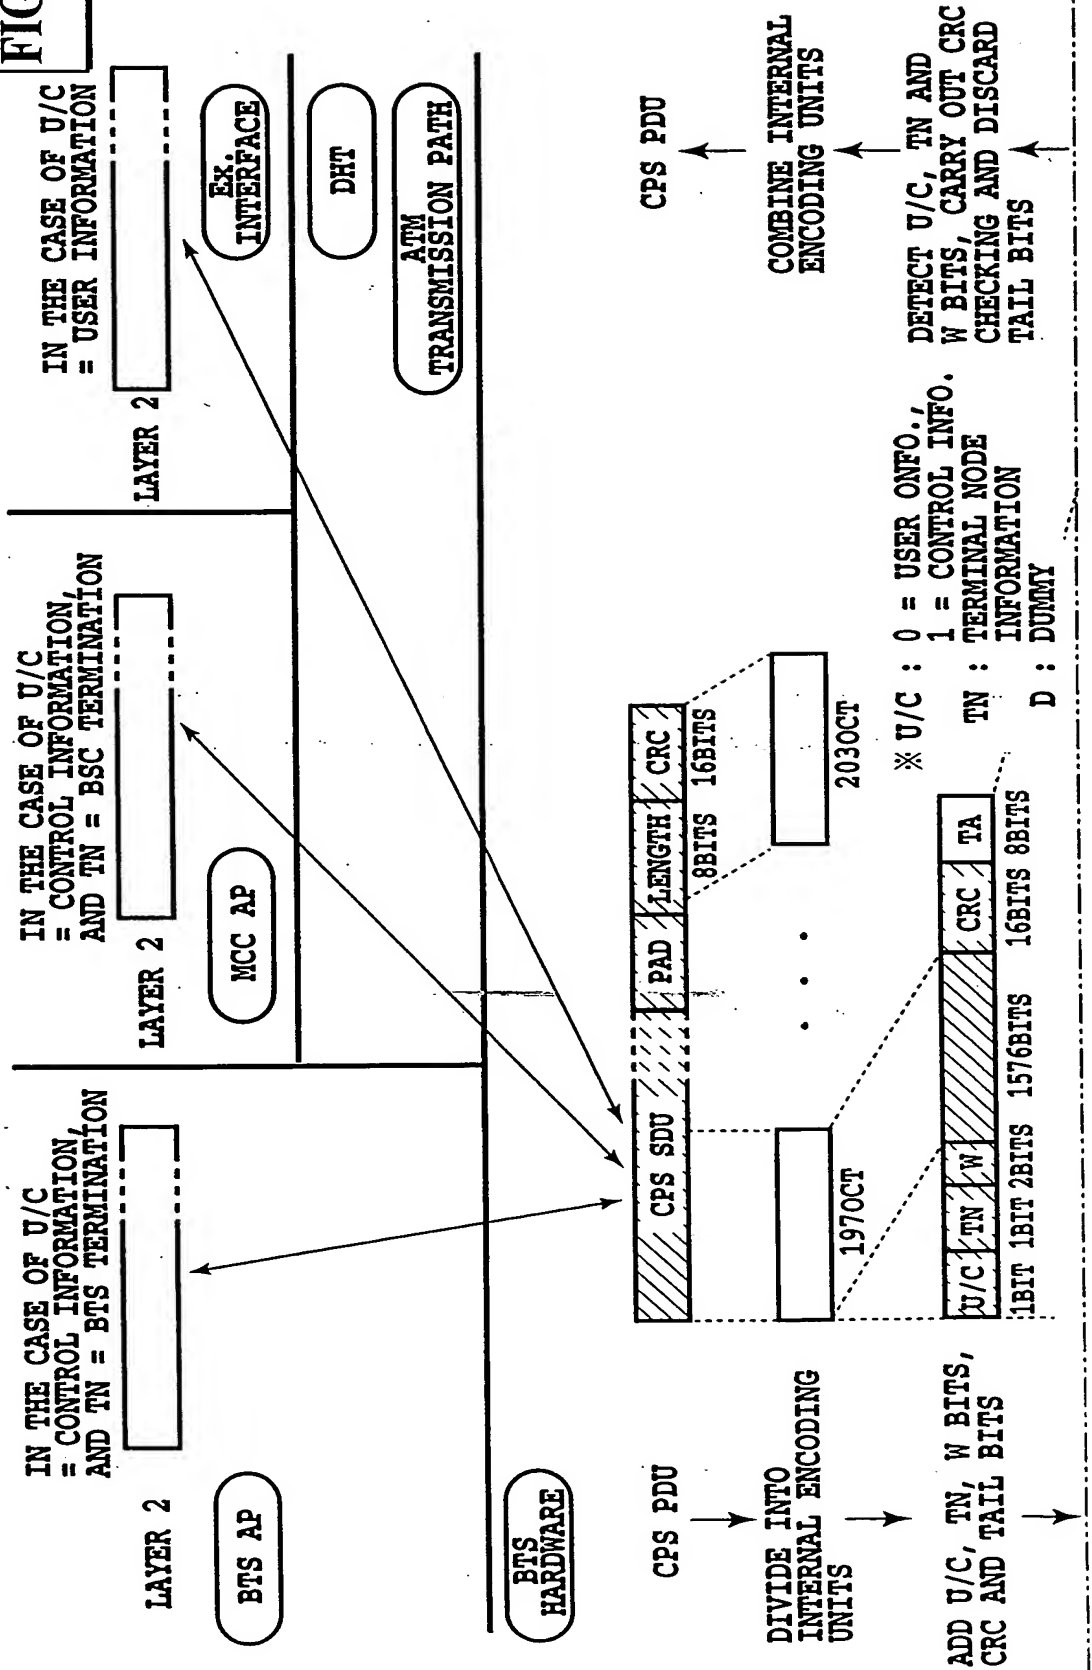

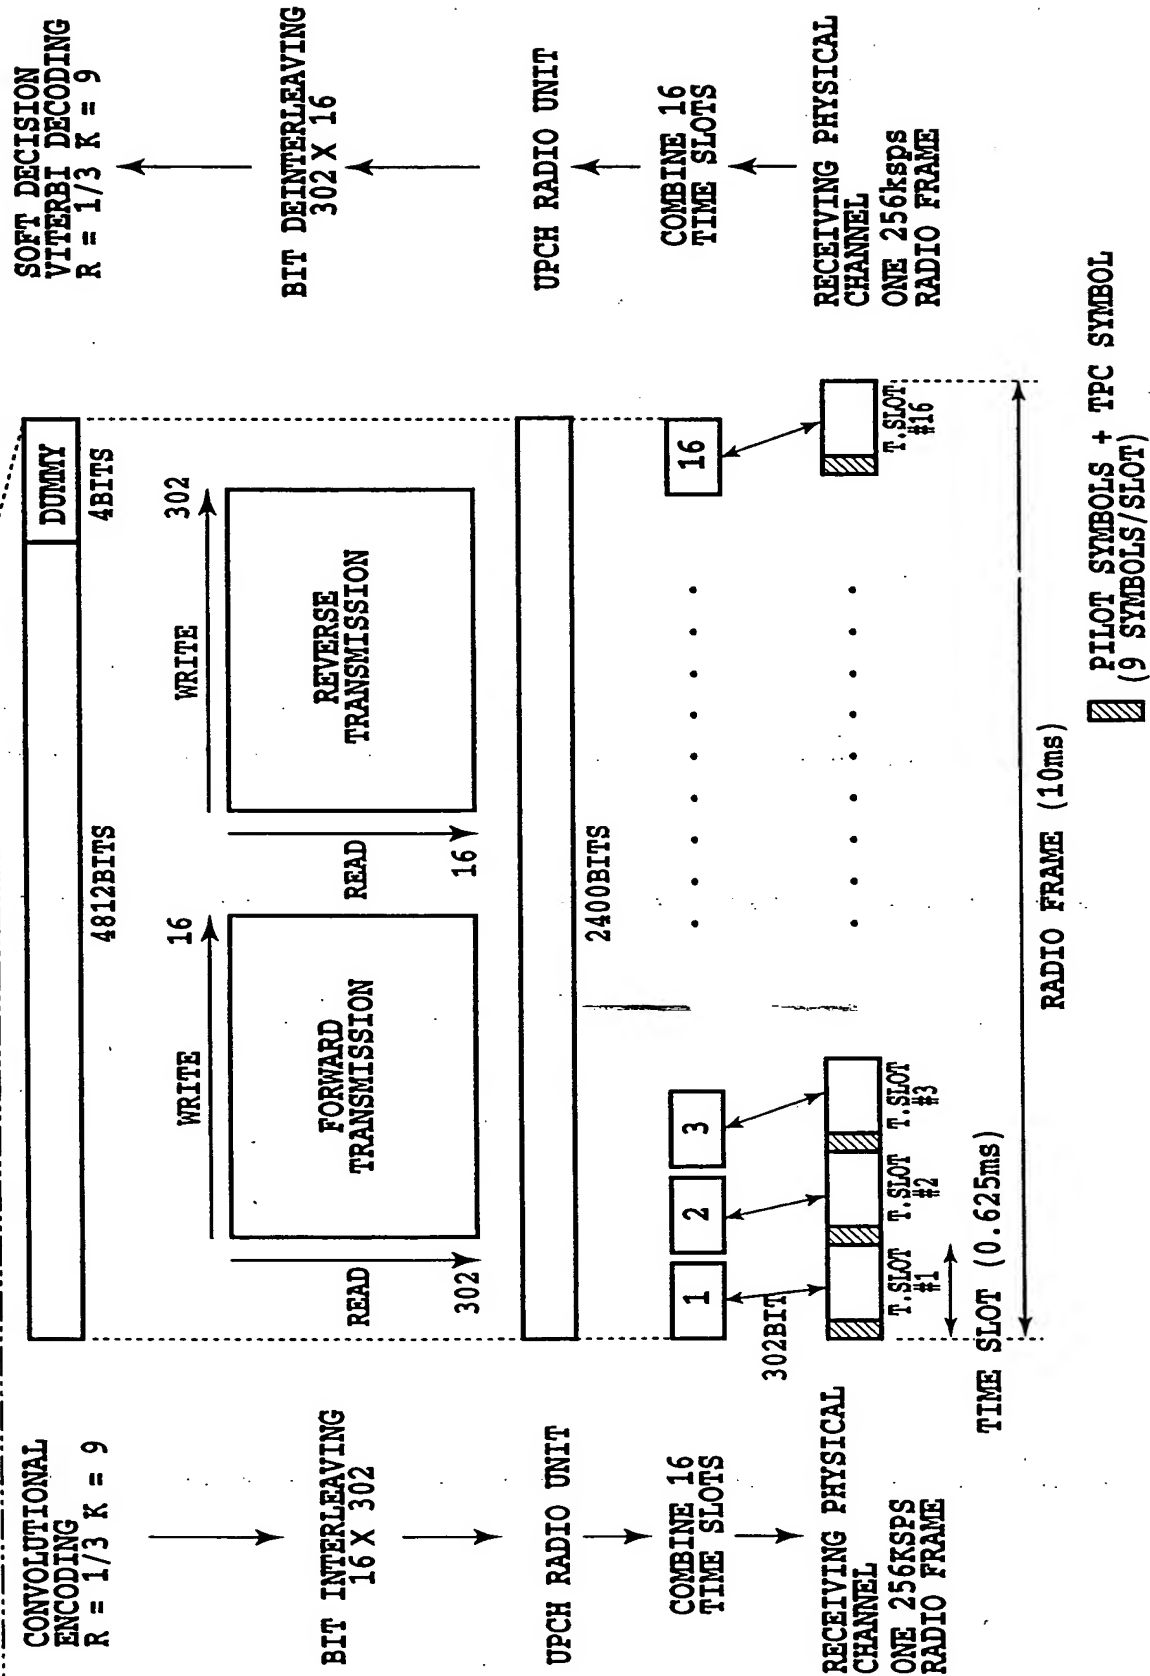


FIG.84B

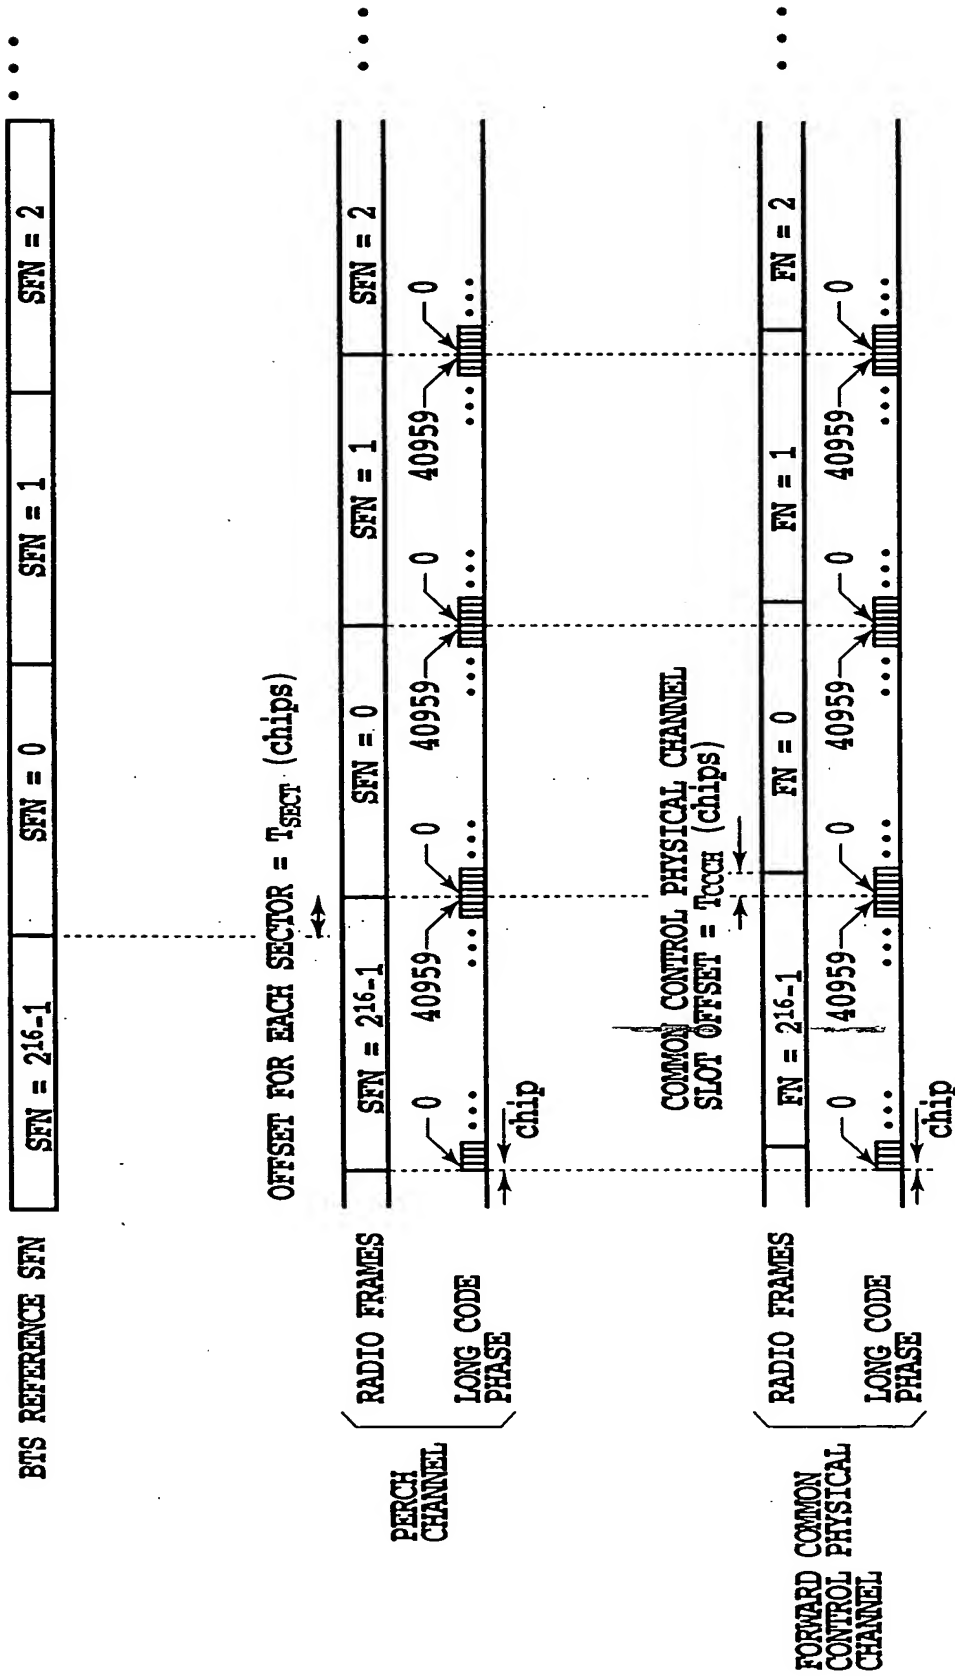


FIG.85

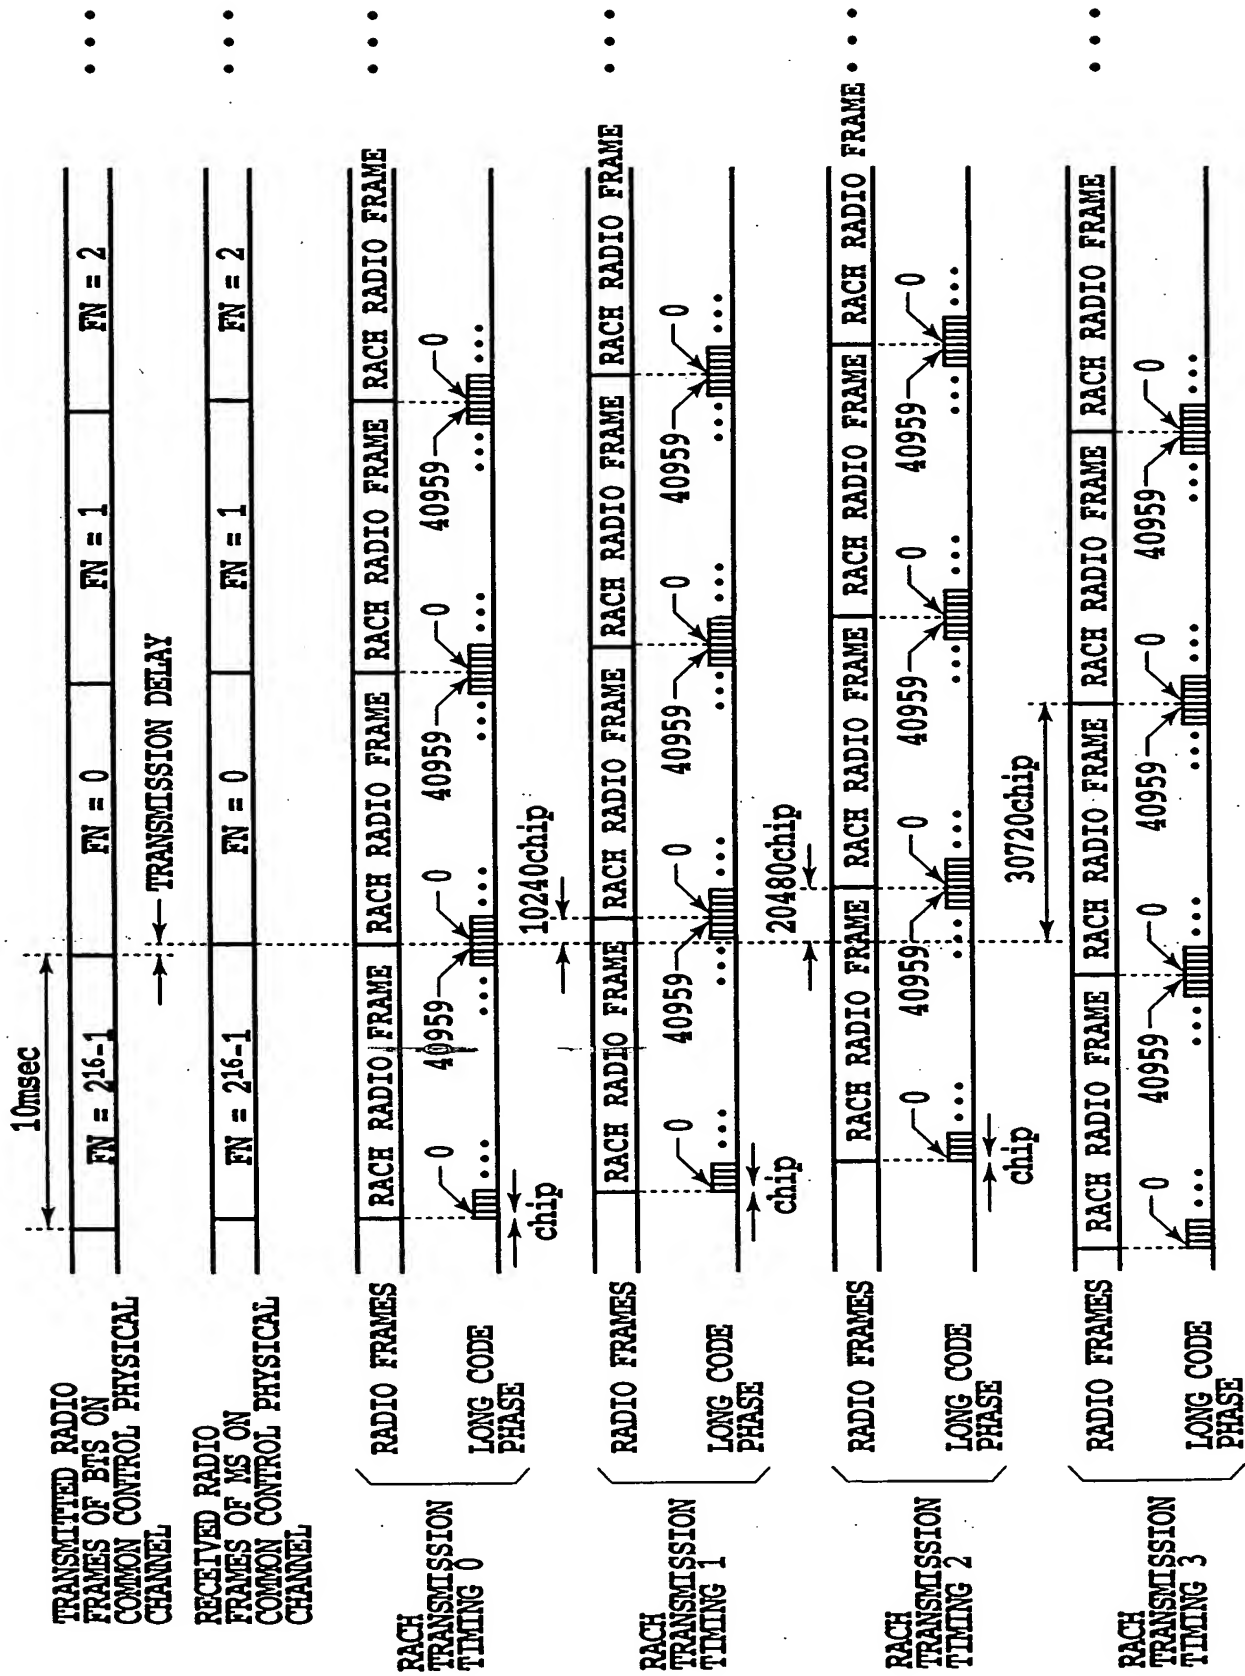



FIG.86

FIG.87

FIG.87A
FIG.87B

FIG.87A

120/134

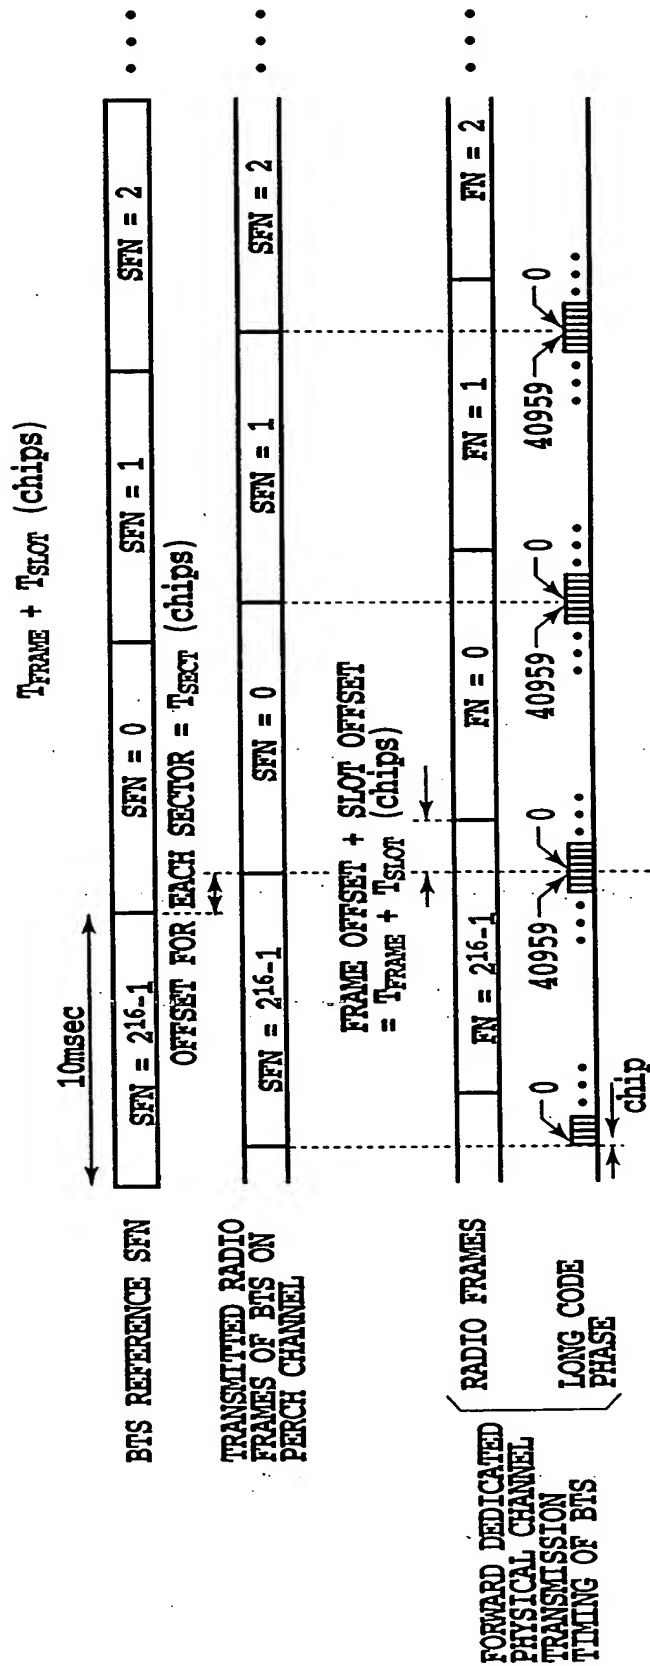

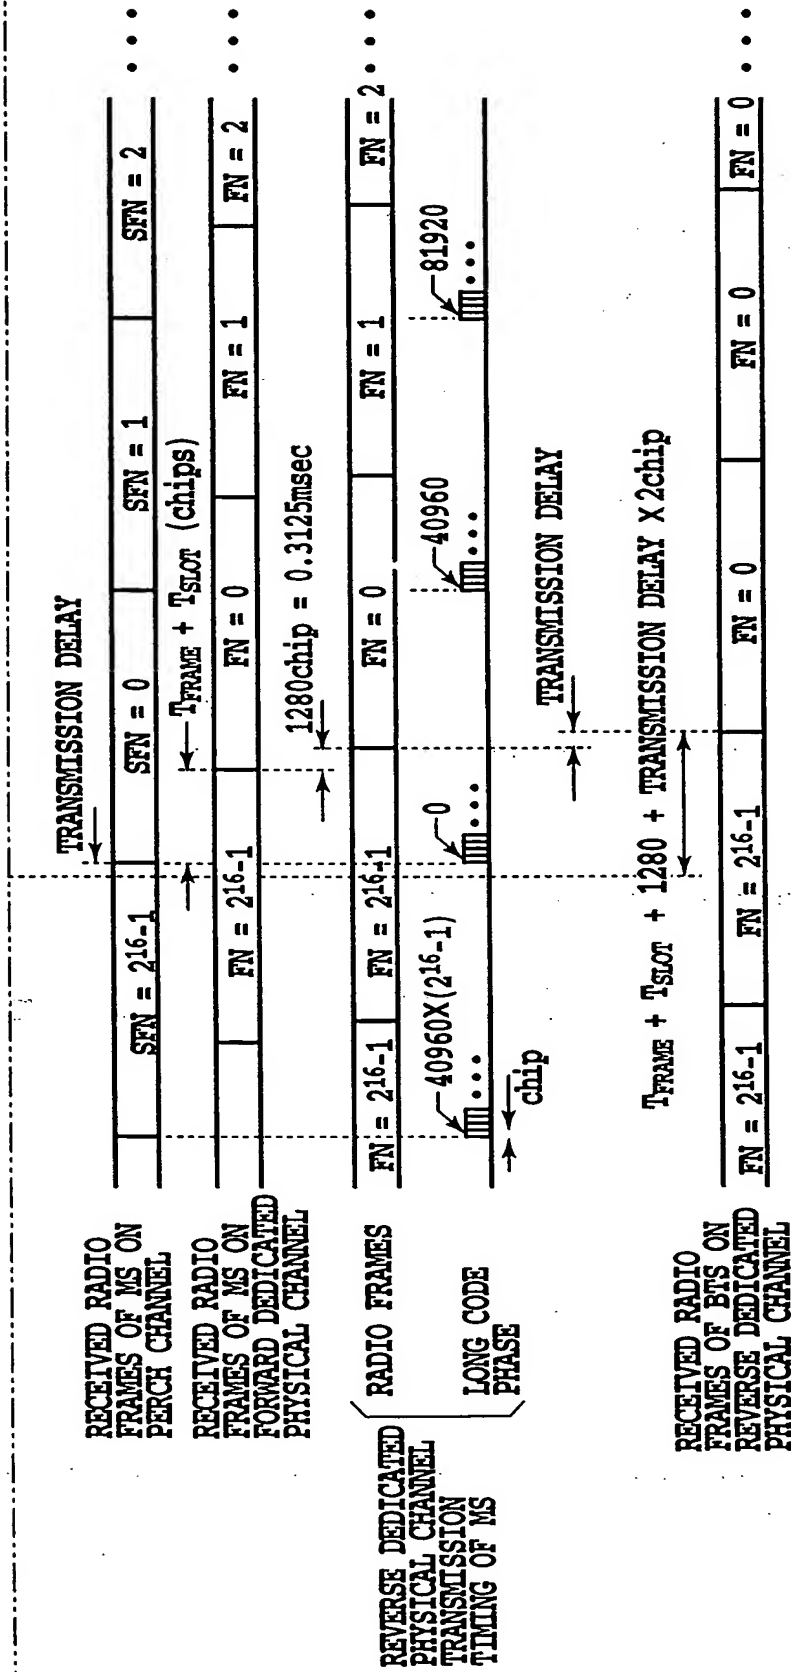
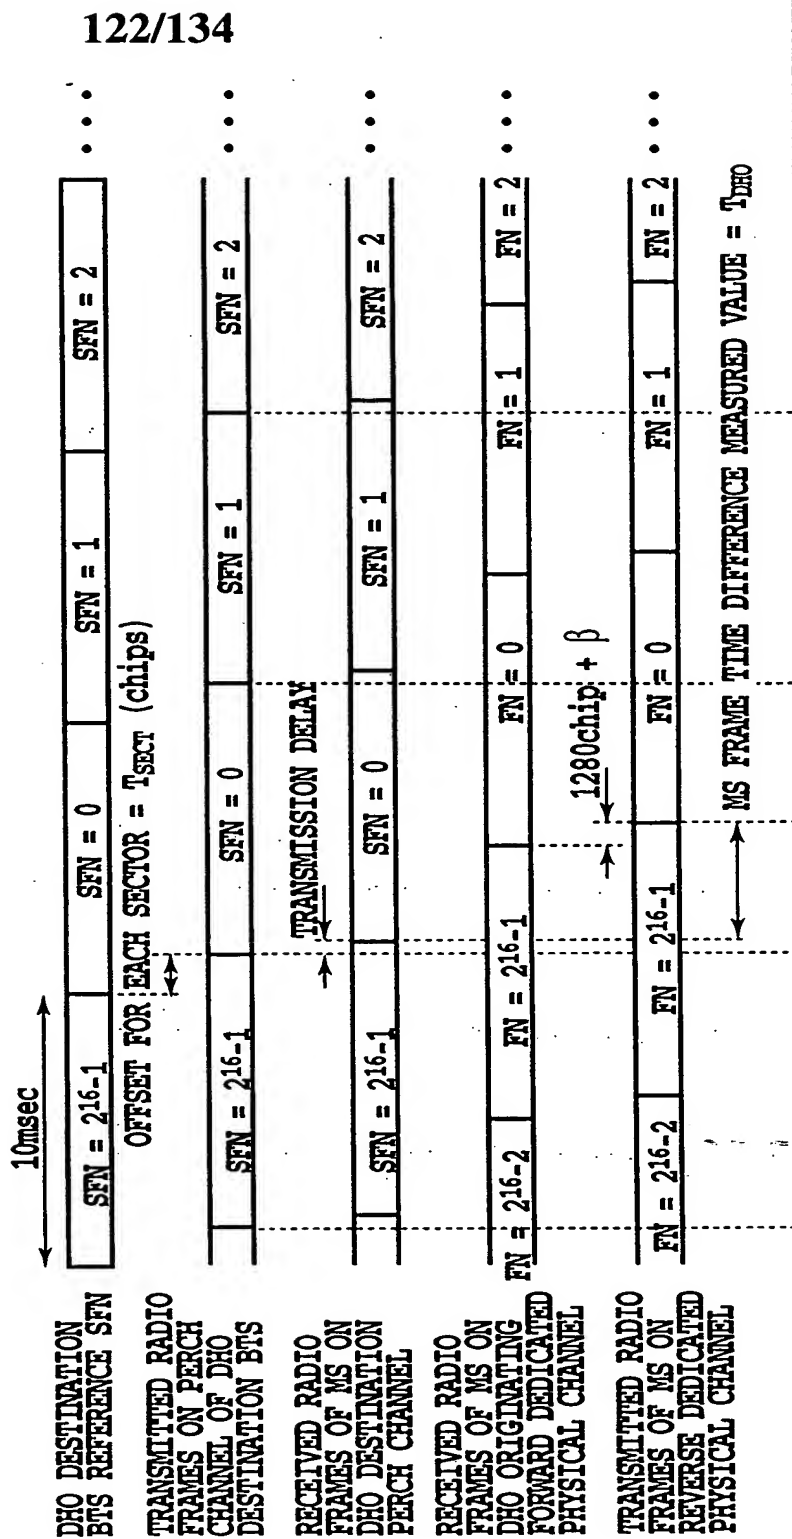


FIG.87B

FIG.88

FIG.88A
FIG.88B

FIG.88A



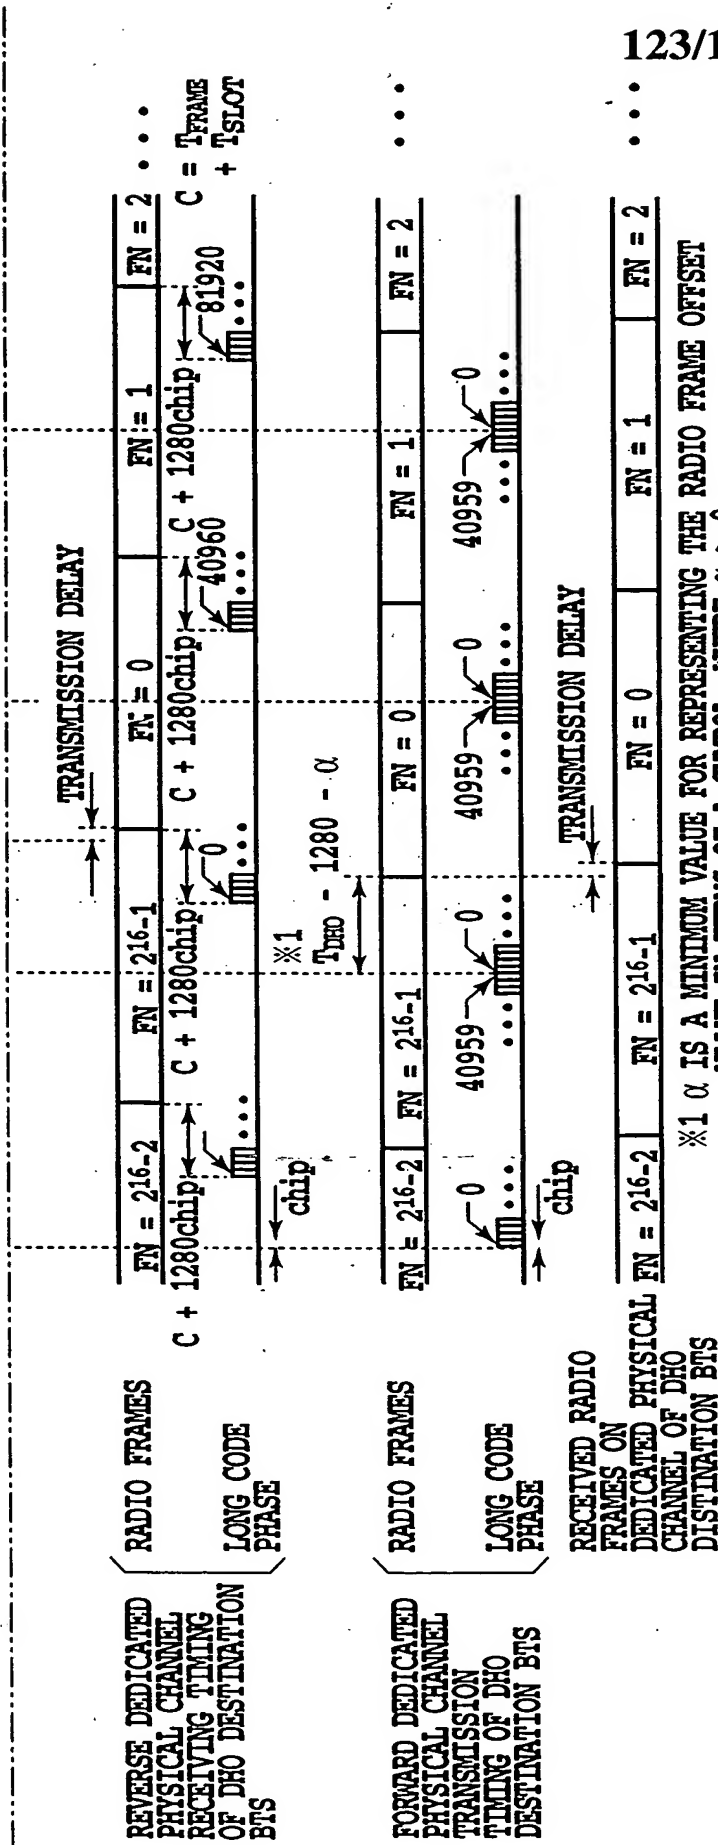


FIG.88B

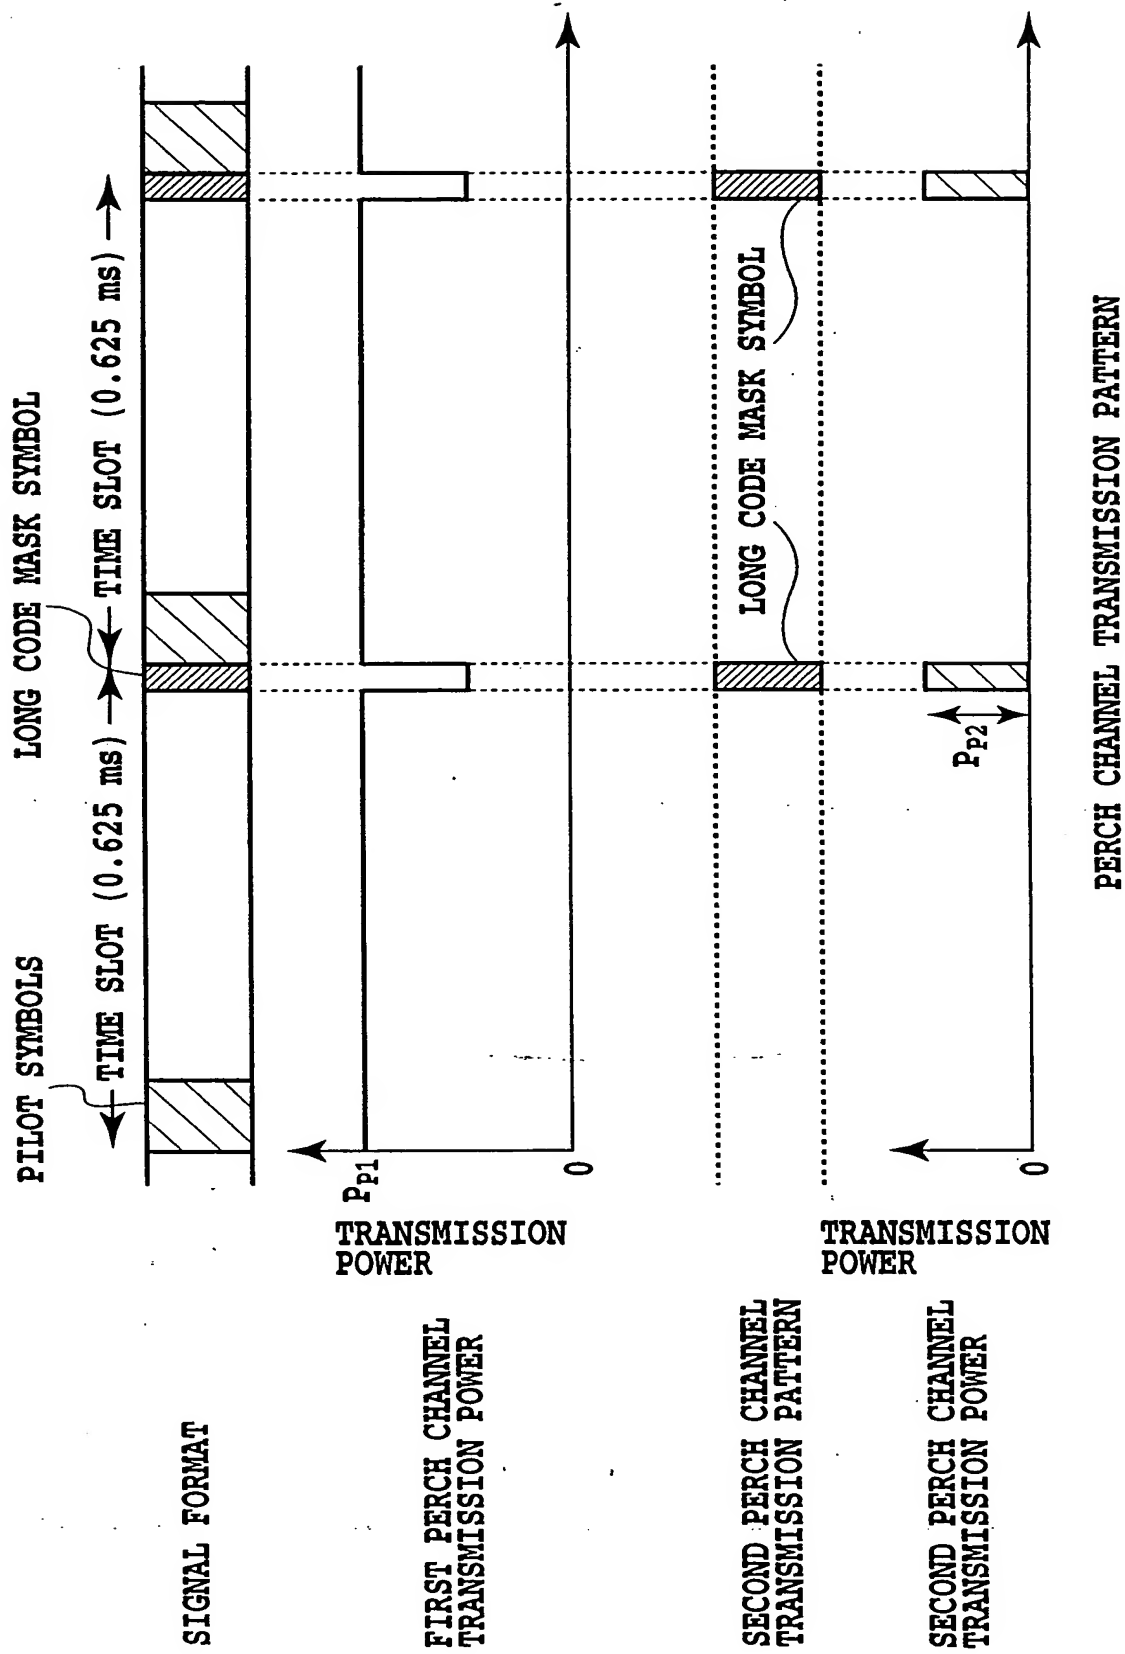



FIG.89

FIG.90

FIG.90A

FIG.90B

FIG.90A

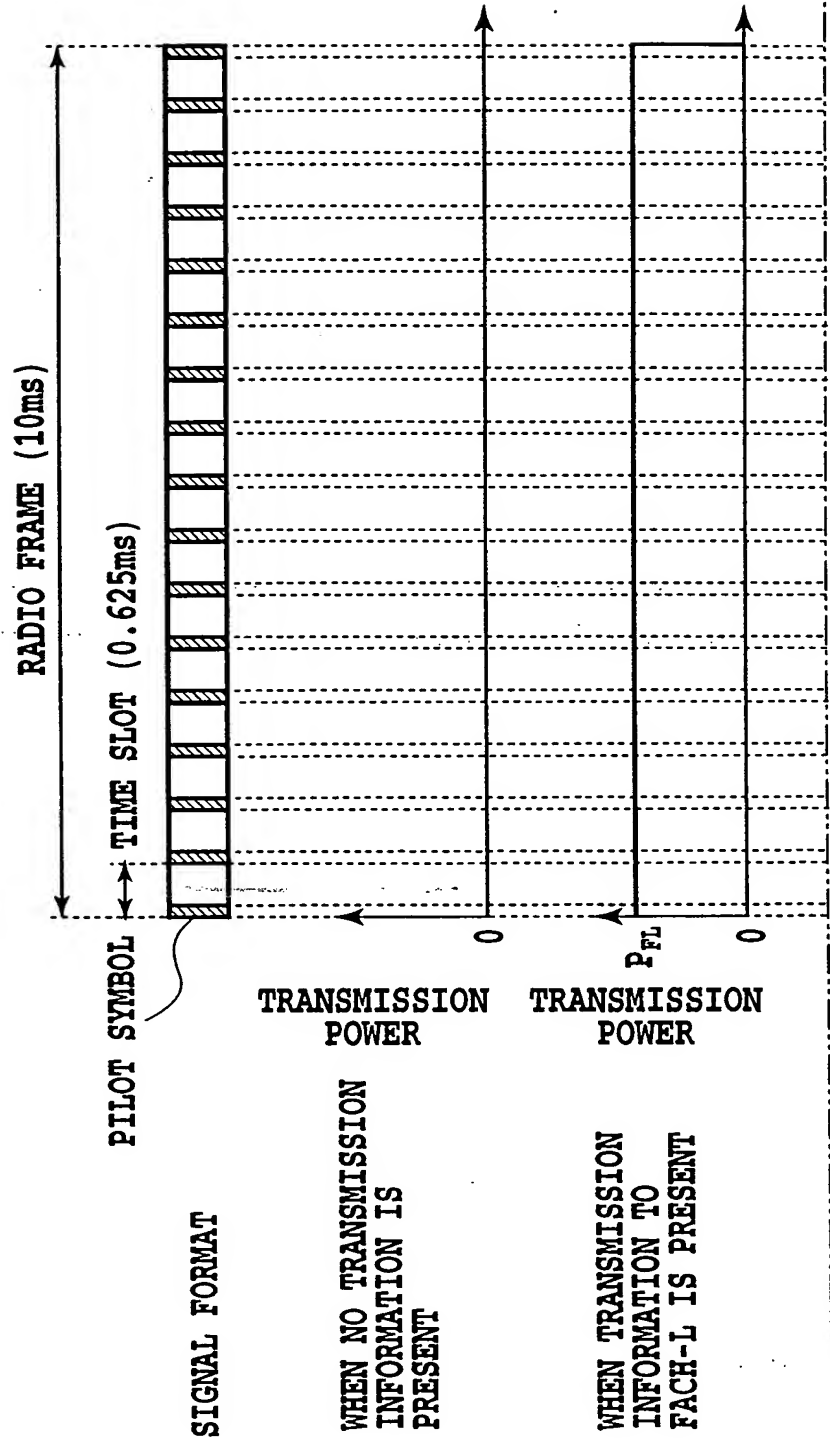

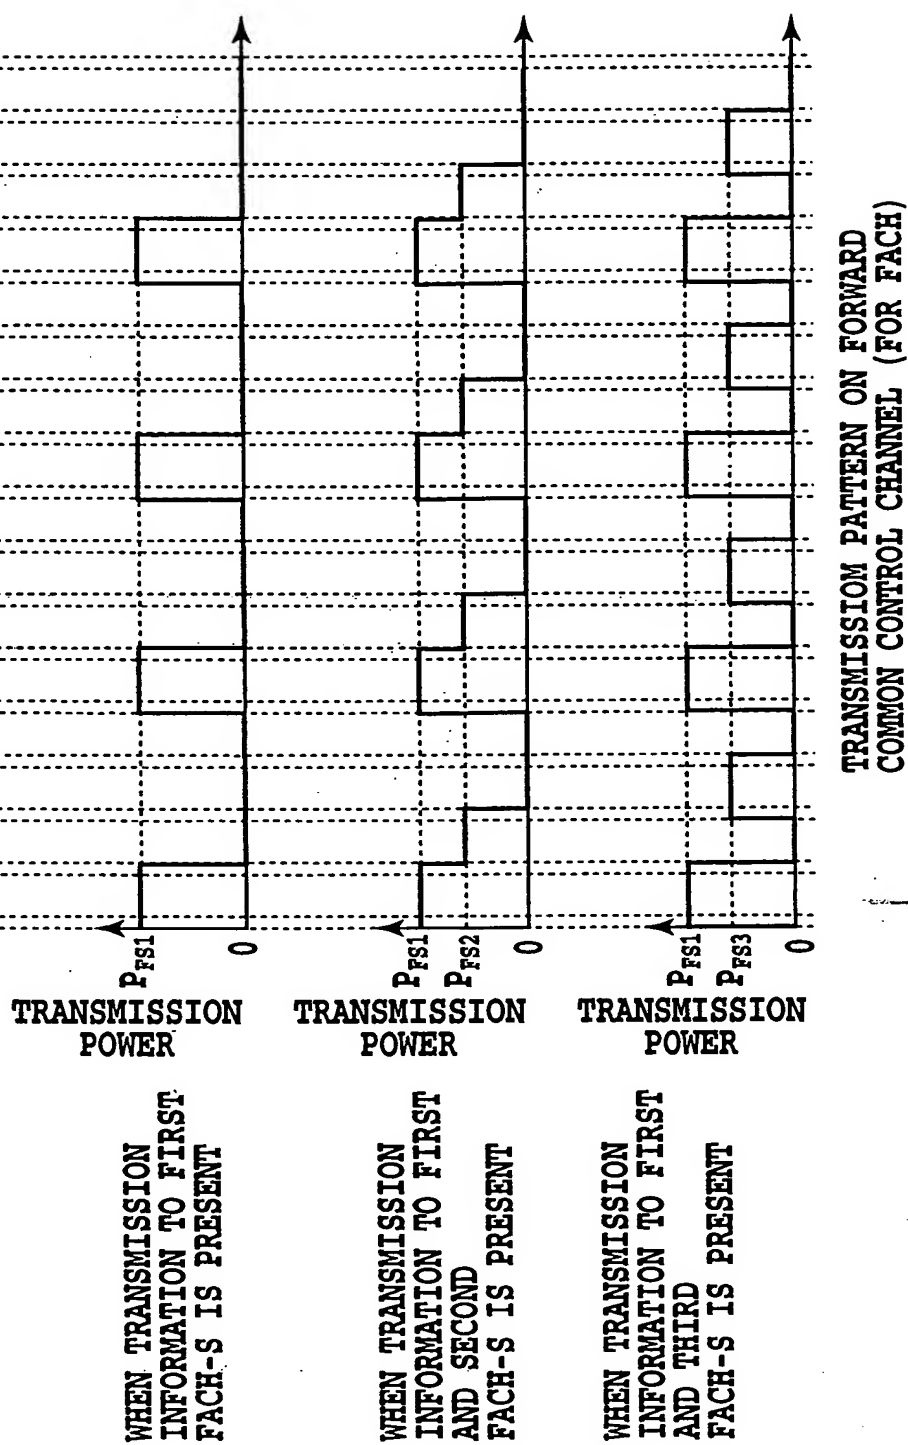


FIG.90B

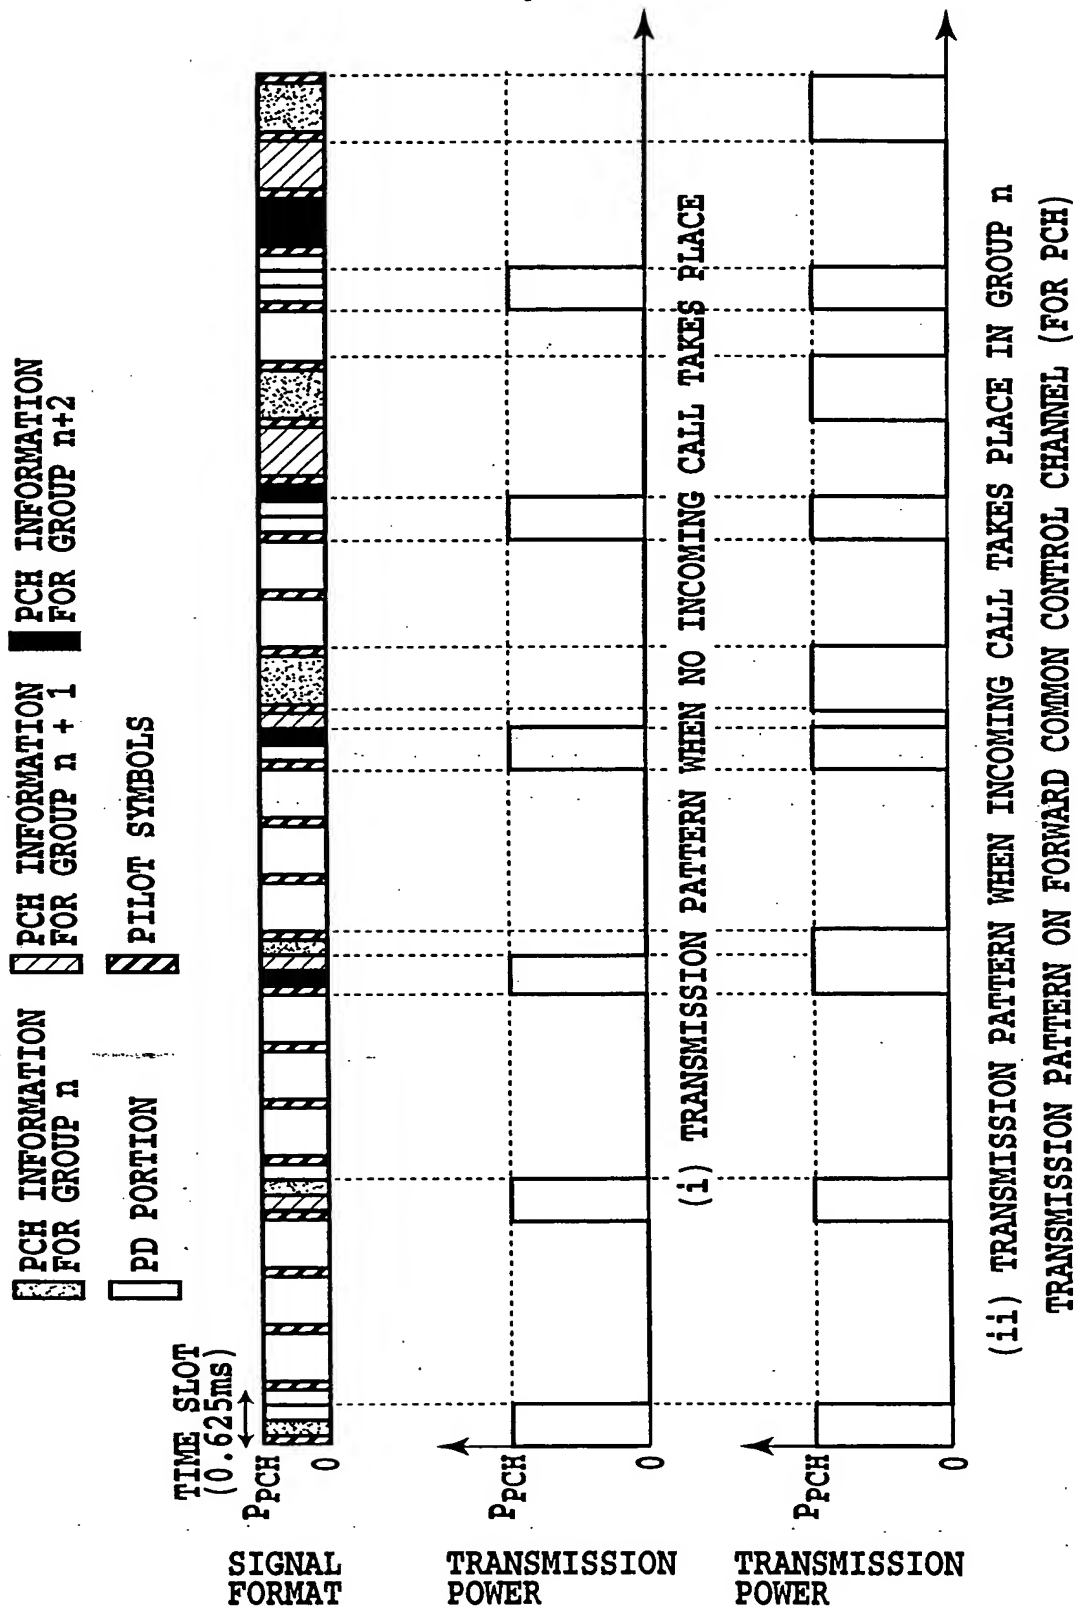


FIG.91

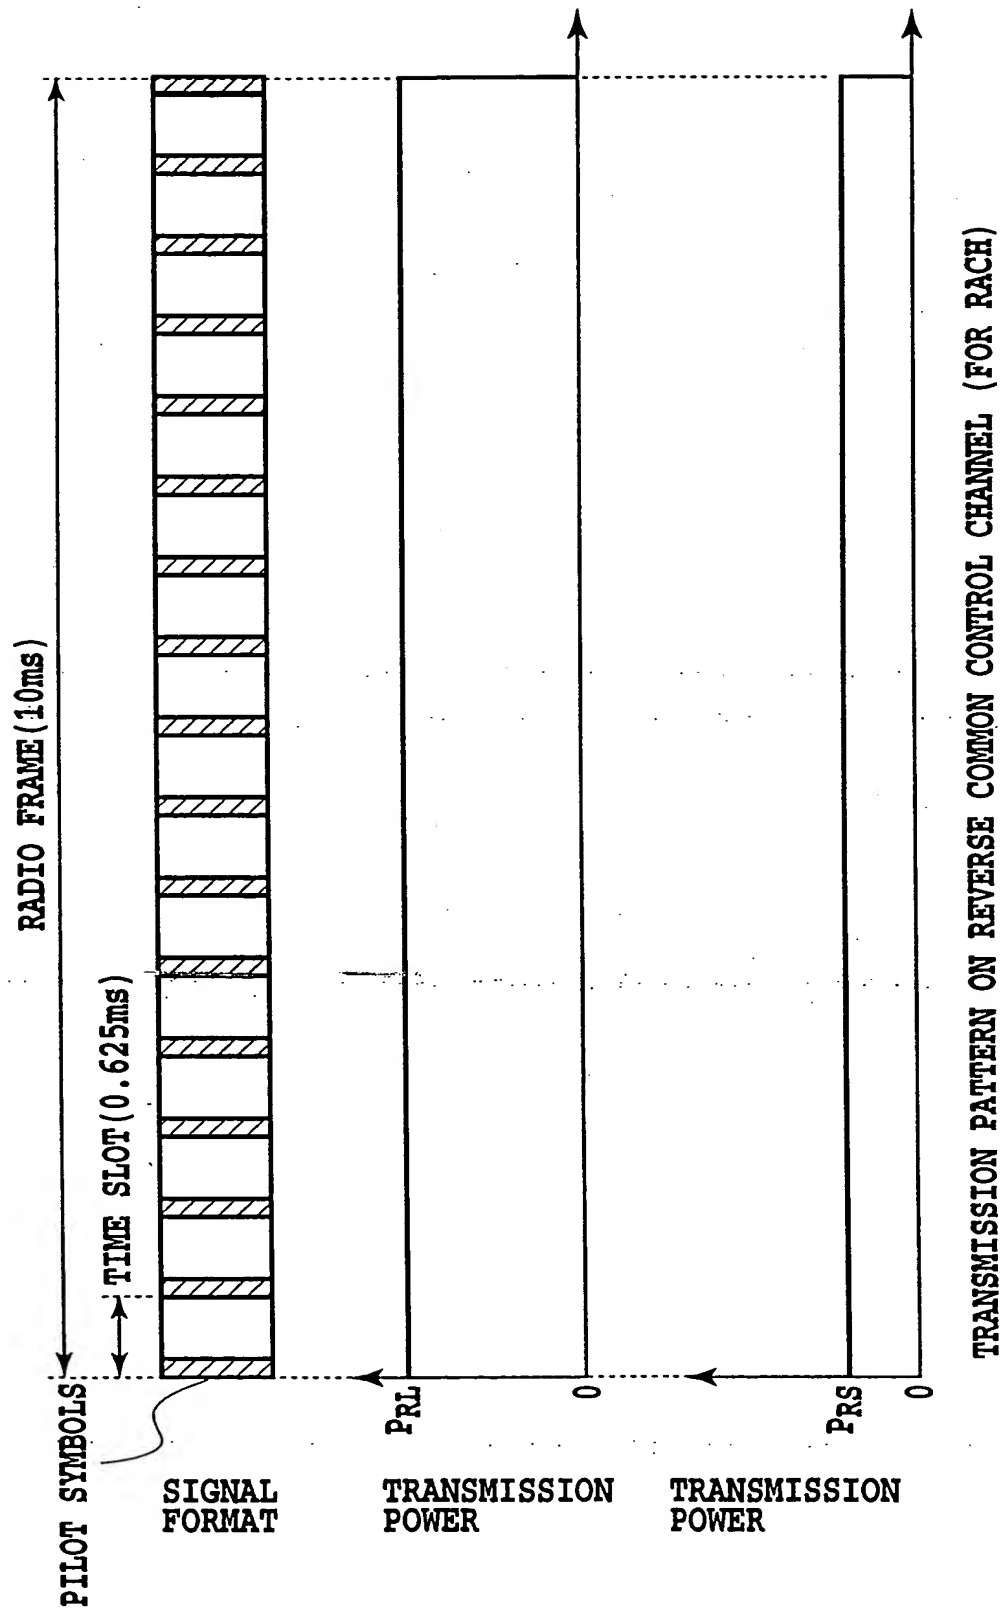


FIG.92


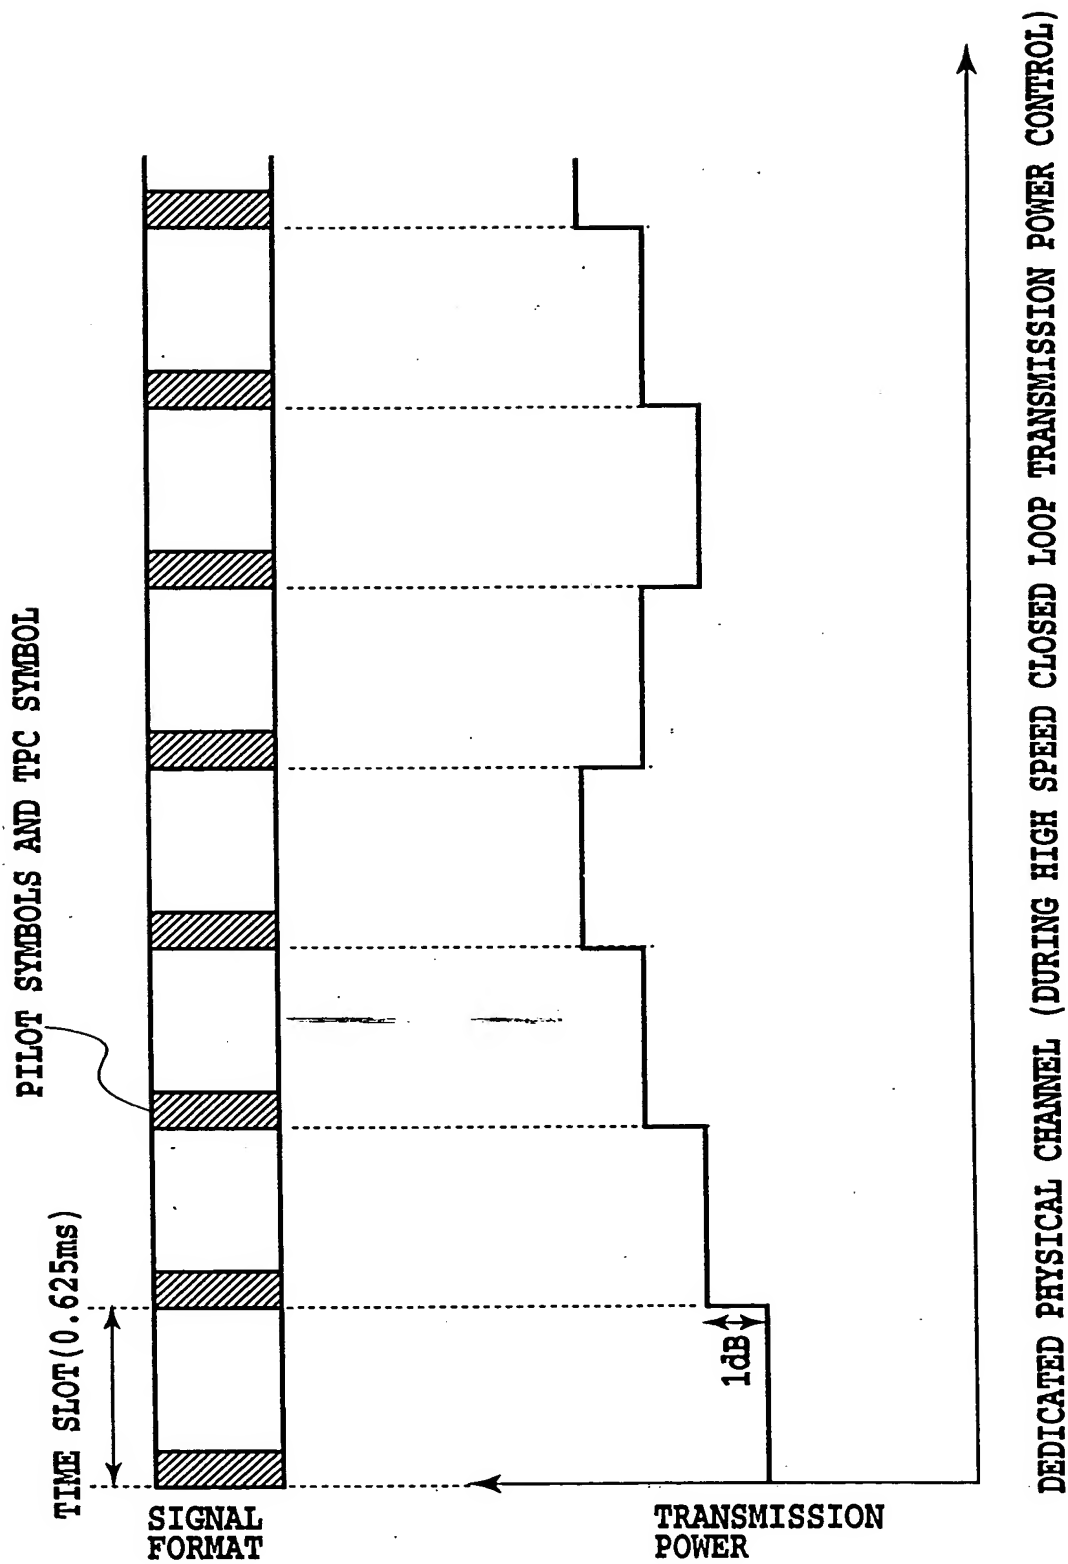


FIG.93

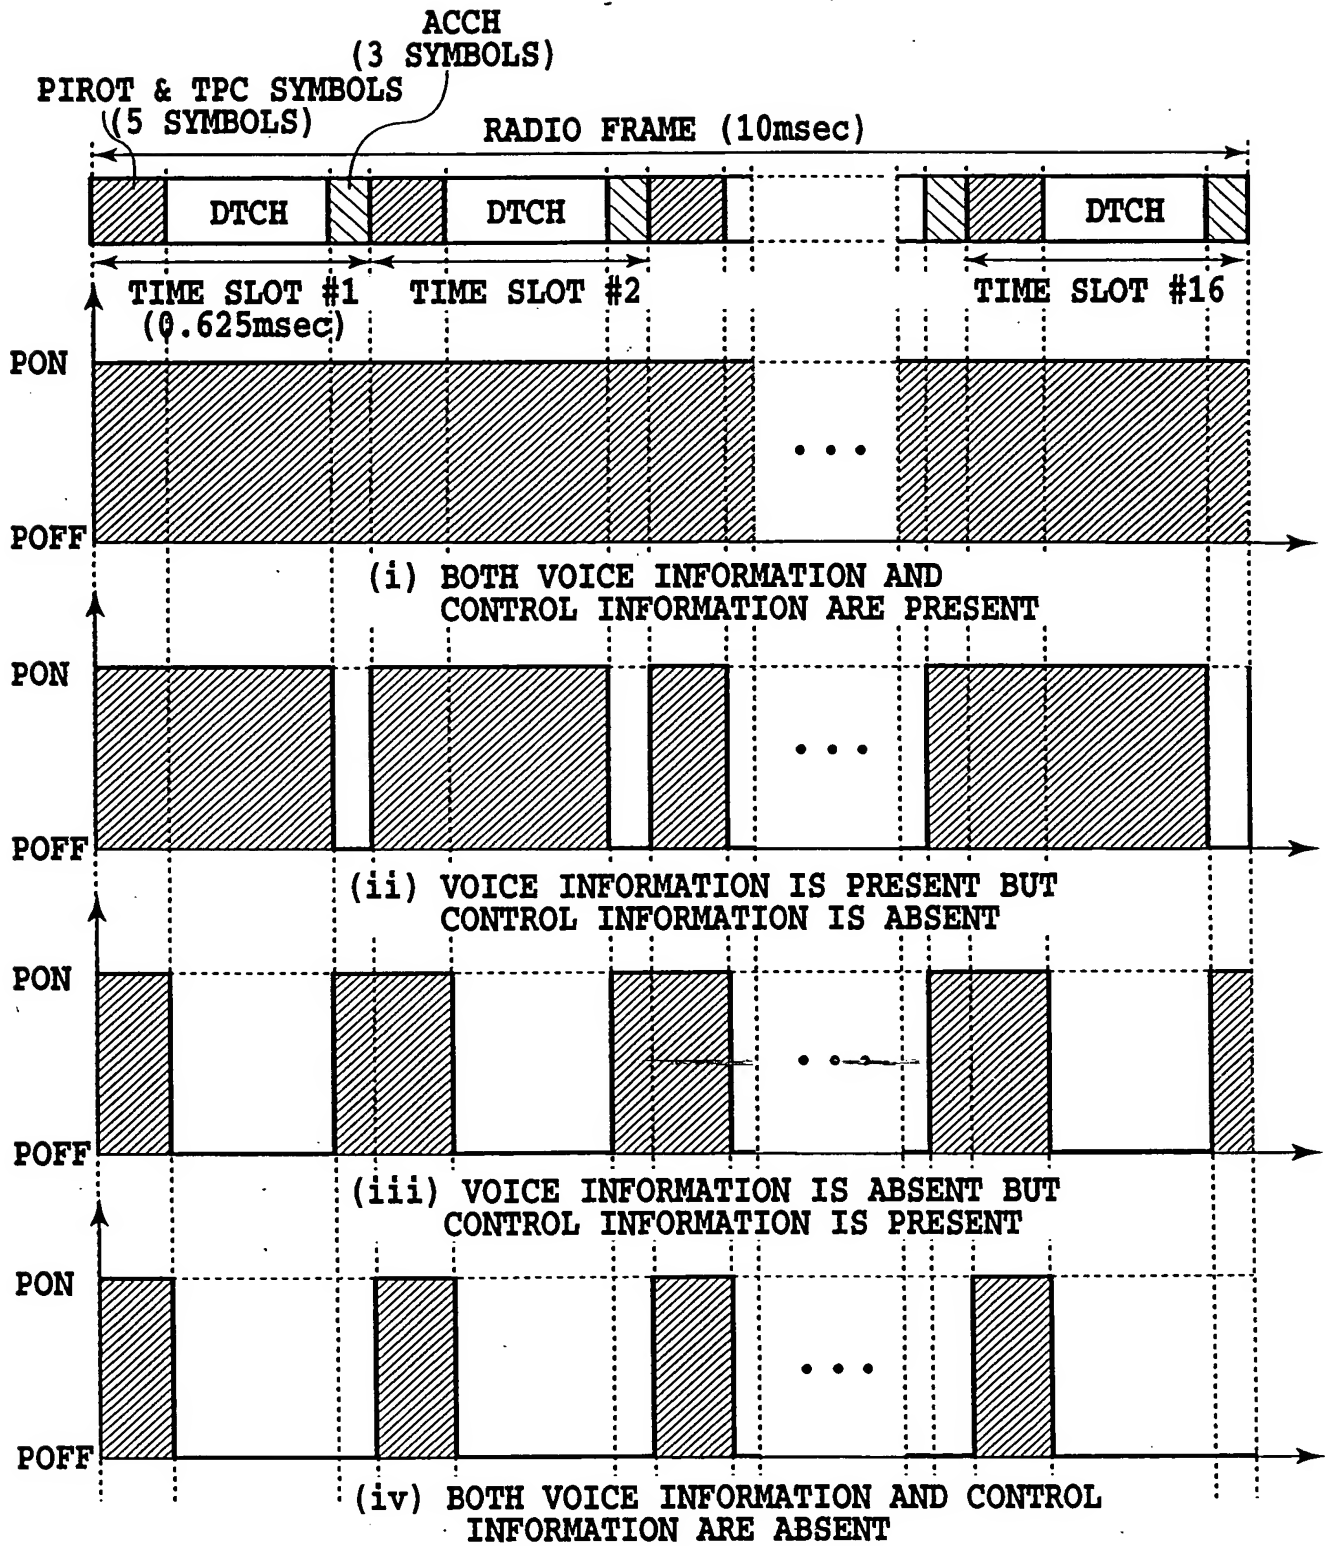

32 KSPS DEDICATED PHYSICAL CHANNEL (DTX CONTROL)

FIG.94

FIG.95

FIG.95A

FIG.95B

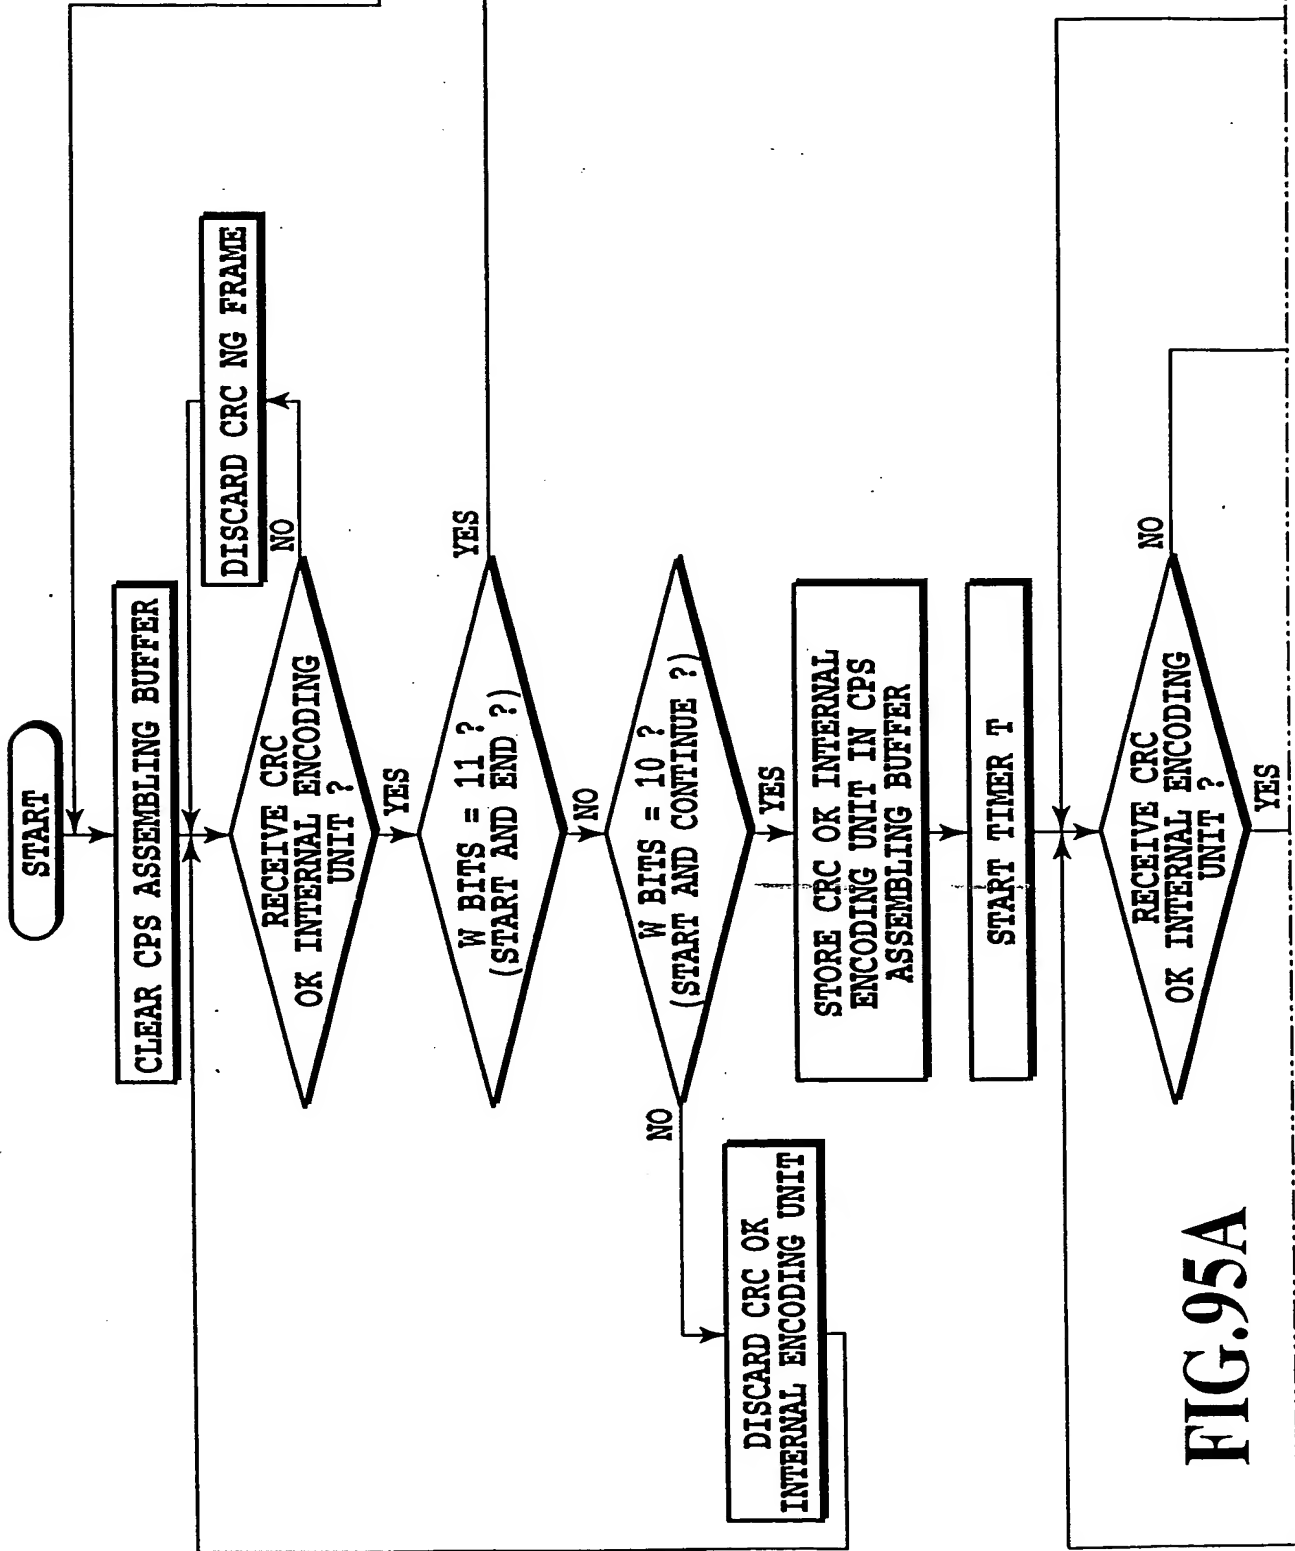


FIG.95A

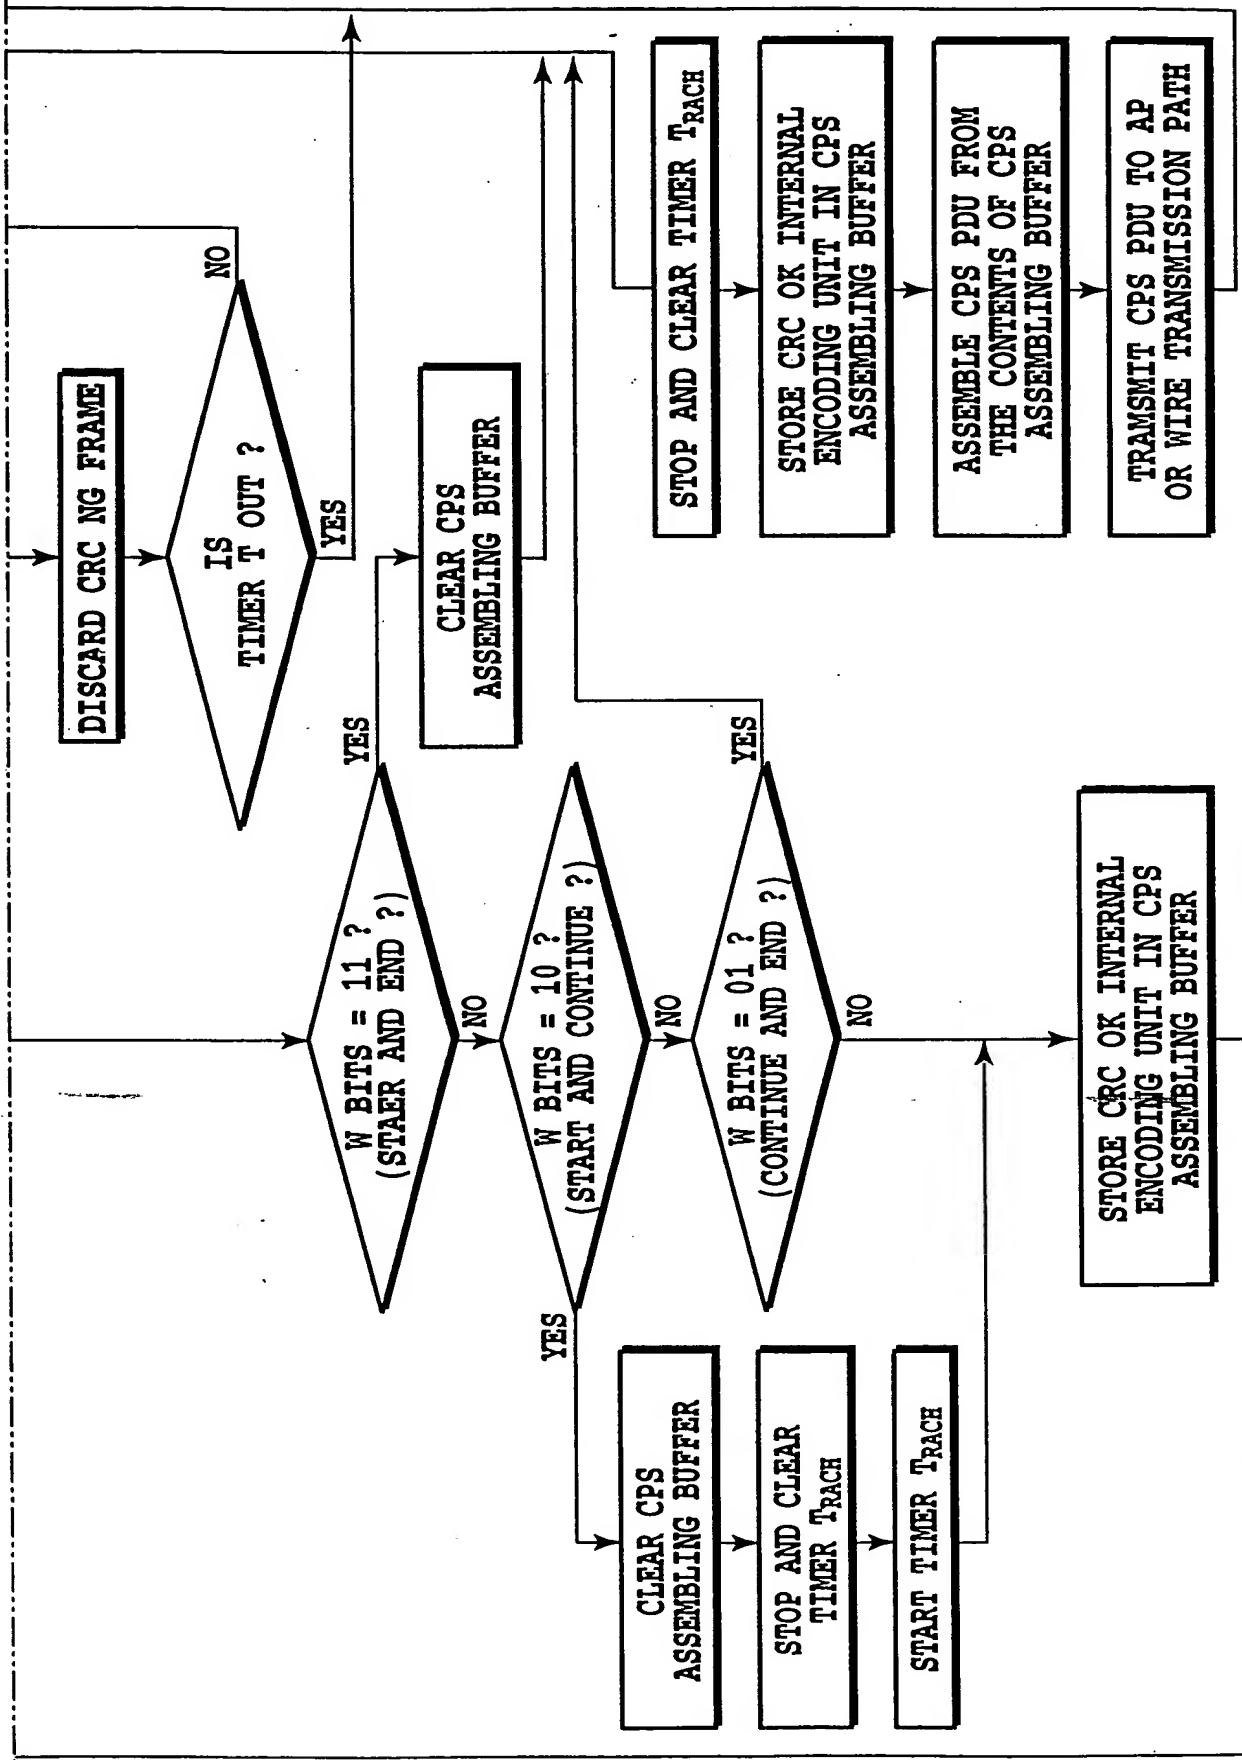


FIG.95B

FIG.96

FIG.96A

FIG.96B

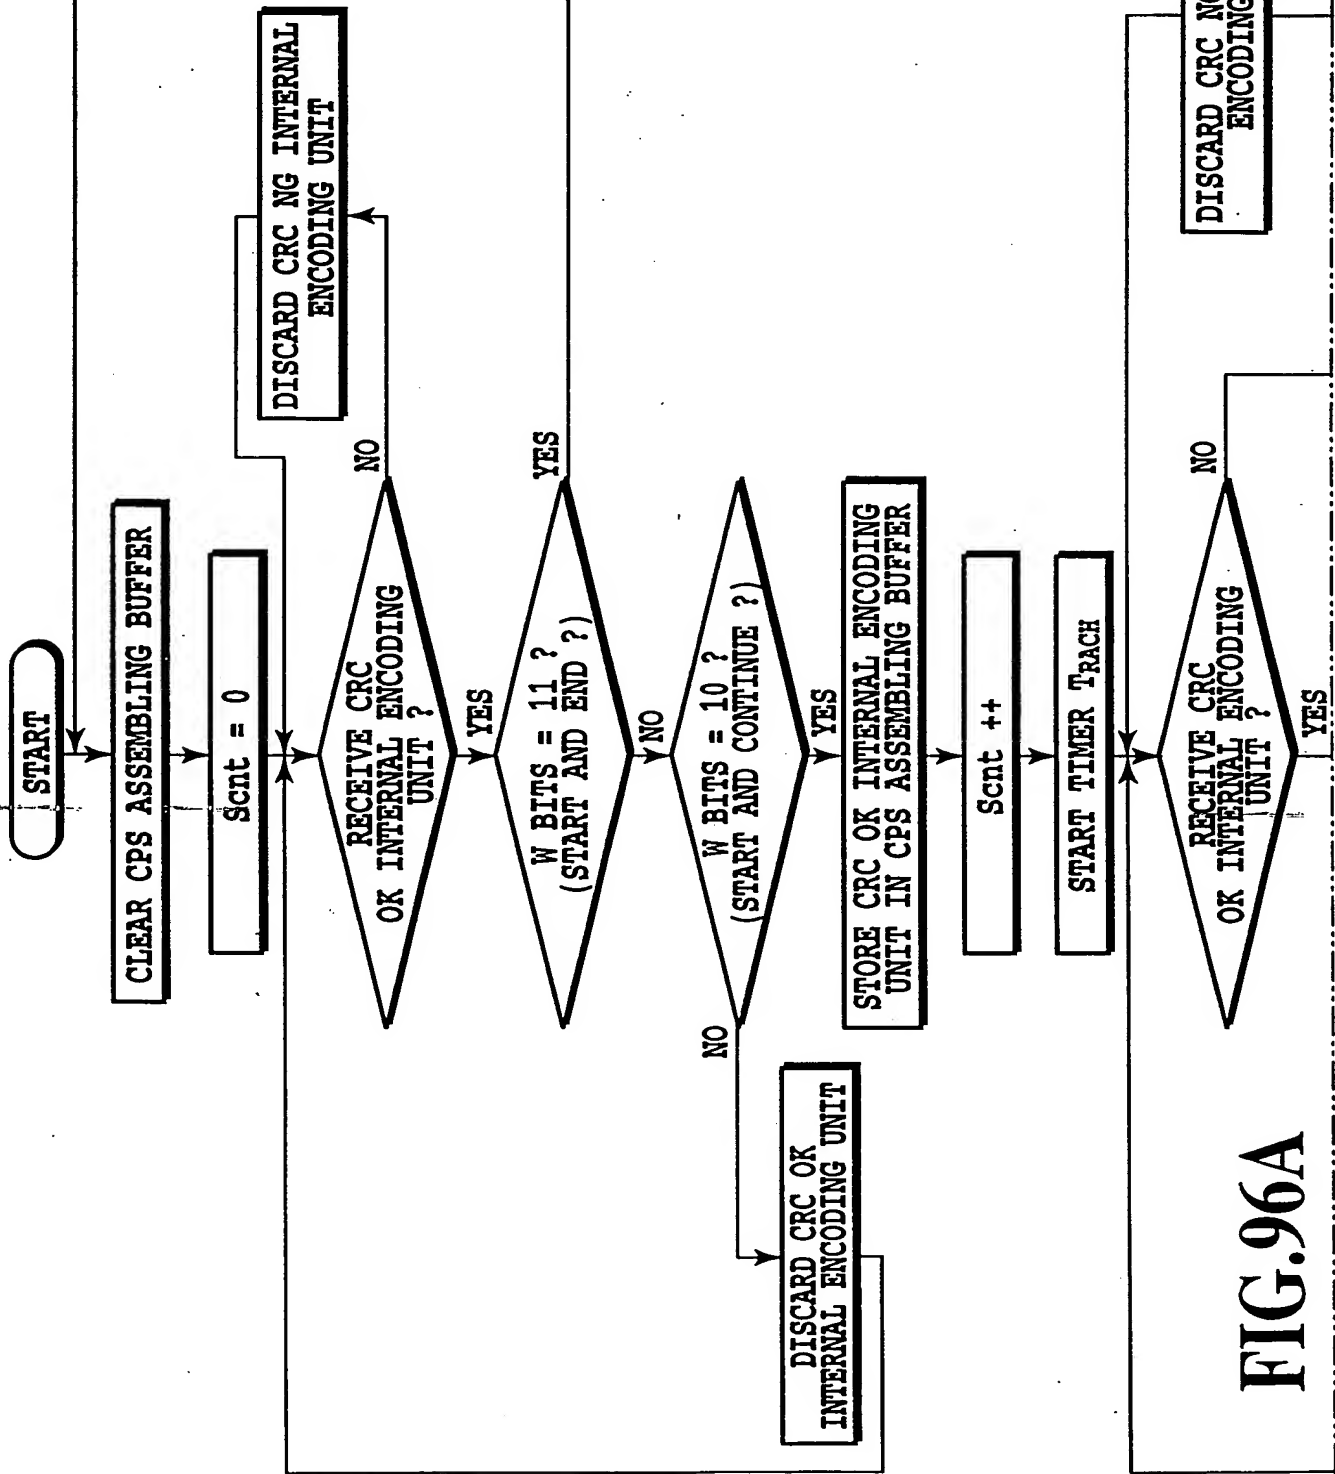


FIG.96A

FIG. 96B

